


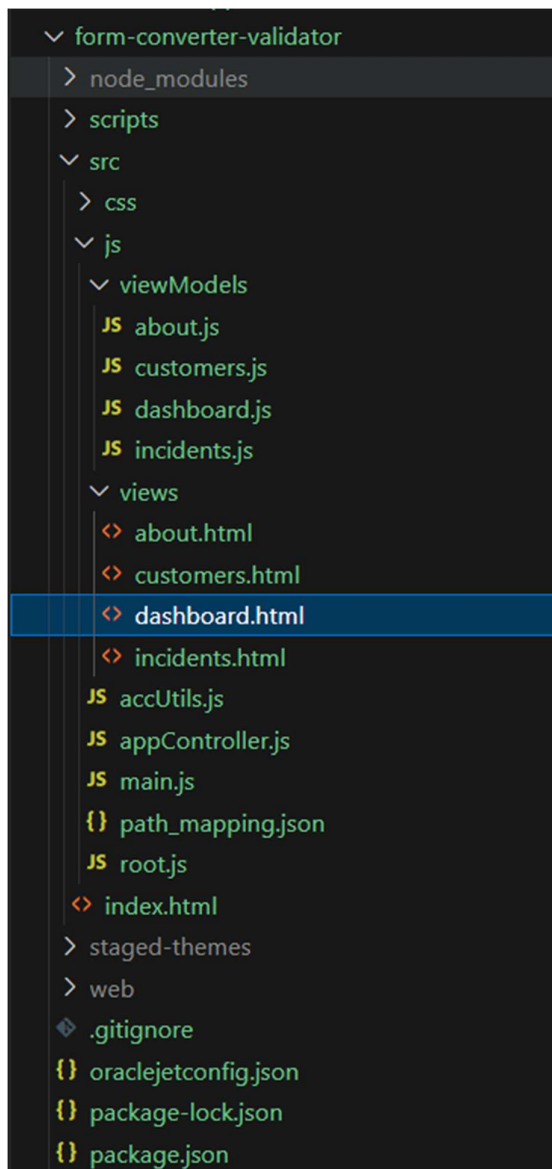

Step 1: Setup Modules and Observables

Location create a file at `src/js/viewModels/dashboard.js`

```
define([
  'knockout',
  'ojs/ojknockout',
  'ojs/ojformlayout',
  'ojs/ojdatetimepicker',
  'ojs/ojconverter-datetime',
  'ojs/ojvalidator-length' ,
], function (ko, ojknockout, ojformlayout, ojdatetimepicker,
DateTimeConverter) {

  function ViewModel() {
    var self = this;
```

```

self.birthDate = ko.observable();
self.name = ko.observable();
    var LengthValidator = require('ojs/ojvalidator-length');

self.dateConverter = new DateTimeConverter.IntlDateTimeConverter({
    pattern: "MM/dd/yyyy"
});

self.lengthValidator = [
    new LengthValidator({
        min: 3,
        max: 10,
        hint: {
            inRange: "Enter between 3 and 10 characters"
        }
    })
];

}

return new ViewModel();
});

```

Step 2 : create a UI . so, create a file at location: src/js/view/dashboard.html

```

<oj-form-layout>
  <oj-input-date
    label-hint="Enter your Birth Date"
    value="{{birthDate}}"
    converter="[[dateConverter]]"
    help.instruction="Format: MM/DD/YYYY">
  </oj-input-date>


  <oj-input-text
    label-hint="Enter Your Name"
    value="{{name}}"
    required
    validators="[[lengthValidator]]"
    help.instruction="Only alphabets, 3-10 characters">
  </oj-input-text>

```

```
</oj-form-layout>
```


Step 3: Test the Form

On cli, run ojet serve and see the browser for apps working and UI.

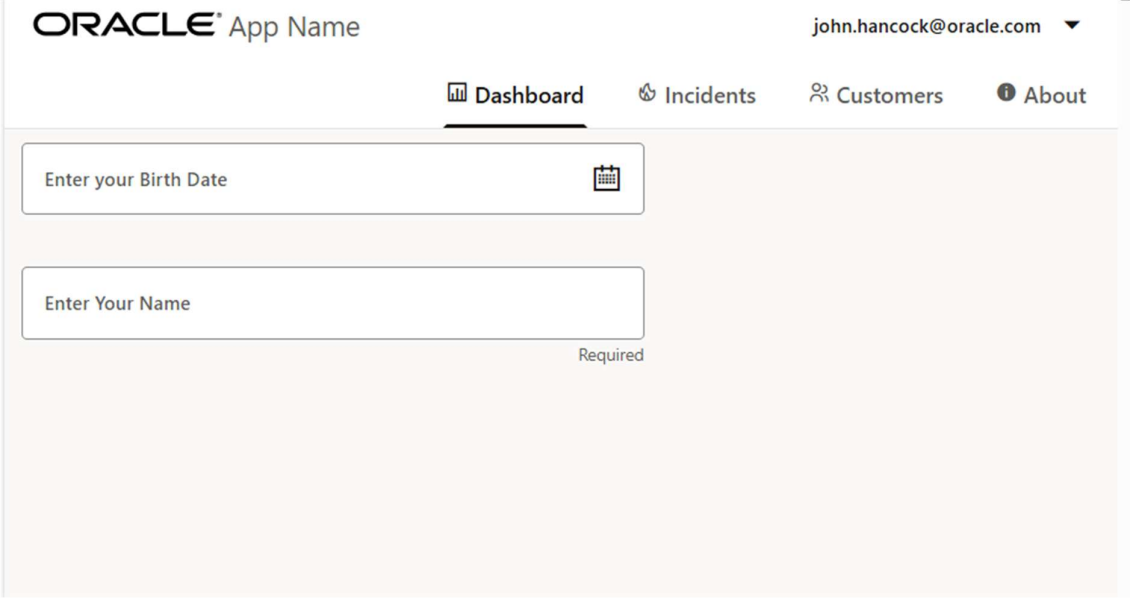

The screenshot shows a web application interface for "ORACLE App Name". The user is logged in as "john.hancock@oracle.com". The navigation bar includes "Dashboard", "Incidents", "Customers", and "About". The main form area contains two input fields: "Enter your Birth Date" with a calendar icon and "Enter Your Name" with a "Required" label below it.

when you click on birth date field. it will display a tip to enter in correct format. and on name field, it will say to enter not more than 10 characters as validations.

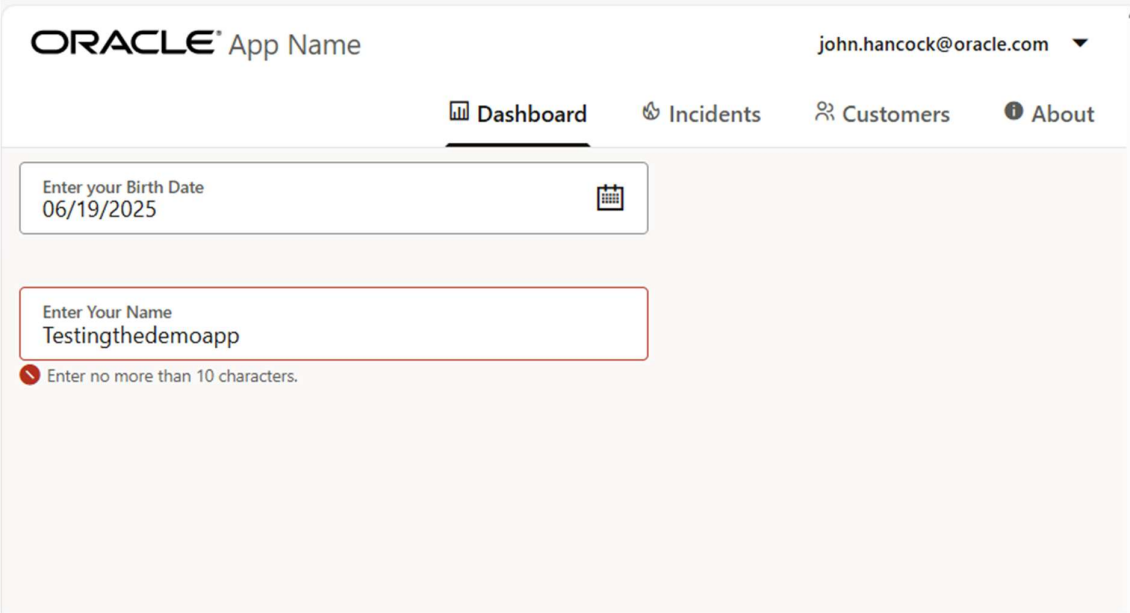

The screenshot shows the same web application interface, but now the "Enter your Birth Date" field is filled with "06/19/2025". The "Enter Your Name" field is filled with "Testingthedemoapp" and has a red border and a validation error message: "Enter no more than 10 characters."

So, you have successfully implemented converters to enter correct date format and validators to enter not more than 10 characters.

Explanation of the code:

Dashboard.html

1. oj-input-date

- This is a **date input field** created using Oracle JET's `<oj-input-date>` component.
- `label-hint` adds a label above the field.
- `value="{{birthDate}}"` binds the input to the **Knockout observable birthDate** in your ViewModel.
- `converter="[[dateConverter]]"` uses a custom **date format** to control how dates appear.
- `help.instruction` gives users a **friendly instruction** like a placeholder.

2. oj-input-text

- This is a **text input field** for entering the name.
- `value="{{name}}"` binds it to the **observable name**.
- `required` makes the field **mandatory** — it must not be empty.
- `validators="[[lengthValidator]]"` attaches a **length validator** to restrict how many characters can be entered.
- `help.instruction` gives a **hint** below the input box.

Dashboard.js:

- **Module Definition**

```
form-converter-validator > src > js > viewModels > JS dashboard.js > define() callback > ViewModel
1  define([
2    'knockout',
3    'ojs/ojknockout',
4    'ojs/ojformlayout',
5    'ojs/ojdatetimepicker',
6    'ojs/ojconverter-datetime',
7    'ojs/ojvalidator-length' ,
8  ], function (ko, ojknockout, ojformlayout, ojdatetimepicker, DateTimeConverter) {
9
```

What's Happening:

- This `define([...], function(...) { })` is a **RequireJS module definition**.
- It loads Oracle JET modules like:
 - `knockout`: For observable bindings.
 - `ojformlayout`, `ojinput-date`, etc.: UI components.
 - `ojconverter-datetime`: Built-in date converter class.
 - `ojvalidator-length`: For validation rules.
- **ViewModel Function**

```
function ViewModel() {  
    var self = this;  
  
    self.birthDate = ko.observable();  
    self.name = ko.observable();  
}
```

What's Happening:

- We define a **ViewModel** function for MVVM binding.
- Inside, we declare two **observables**:
 - `birthDate`: stores the selected date.
 - `name`: stores the entered name.
- **Date Converter**

```
self.dateConverter = new DateTimeConverter.IntlDateTimeConverter({  
    pattern: "MM/dd/yyyy"  
});
```

What's Happening:

- This line creates a **custom date format converter**.
- `pattern: "MM/dd/yyyy"` means the date will appear as month/day/year (like 08/01/2025).
- This converter is then **bound to the oj-input-date** field.

- **Length Validator**

```
self.name = ko.observable();  
var LengthValidator = require('ojs/ojvalidator-length');
```

```
self.lengthValidator = [  
  new LengthValidator({  
    min: 3,  
    max: 10,  
    hint: {  
      inRange: "Enter between 3 and 10 characters"  
    }  
  })  
];  
  
}  
  
return new ViewModel();  
});
```

What's Happening:

- We're creating a **LengthValidator** instance from the required module.
- It enforces that the input **must be between 3 and 10 characters**.
- A **hint** message is also given to help the user.
- The validator is stored in **self.lengthValidator**, which is bound to the name input field.
- **Return new ViewModel();**, exports the ViewModel to be used by the Oracle JET page.