

Analyses of Experimental Heuristics for Package-Handoff Type Problems

Kien Huynh, J.S.B, Mitchell, Gaurish Telang

Contents

	Page
1 Overview	3
2 Single Package Handoff	5
2.1 Wavefront Algorithms	5
2.2 Handoff in a particular order	11
2.3 Plotting	12
2.4 Run Handler associated with this Chapter	15
3 Experiments	17
3.1 Single Package Handoff	17
3.2 Chapter Index of Fragments	23
3.3 Chapter Index of Identifiers	23
Appendices	25
A Supporting Code	26
A.1 Main File	26
A.2 Algorithmic Utilities	30
A.3 Graphical Utilities	32

Chapter 1


Overview

How do you get a package from point A to point B with a fleet of carrier drones each capable of various maximum speeds? This is the question we try to answer in some of its various avatars by developing algorithms, heuristics, local optimality heuristics and lower-bounds.

Specifically, we are given as input the positions P_i of n drones (labelled 1 through n) in the plane each capable of a maximum speed of u_i . Also given is a package present at S that needs to get to T . Each drone is capable of picking up the package and flying with speed u_i to another point to hand the package off to another drone.



(a) An example of a carrier drone. Image taken from [1]

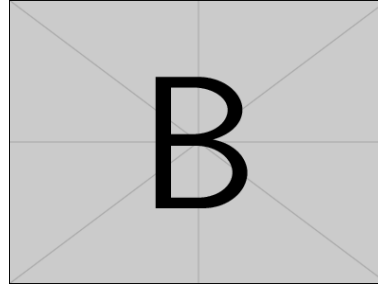

(b) A fleet of drones such as on the left, coordinating to move a package from S to T in the least time possible.

Figure 1.1: An instance of the Package Handoff problem for a single package

The challenge is to figure how to get the drones to cooperate to send the package from S to T in the least possible time i.e. minimize the makespan of the delivery process.

To solve the problem we need to be able to do several things

- Figure out which subset $S = \{i_1, i_2, \dots, i_k\}$ of the drones are used in the optimal schedule.
- Find the order in which the handoffs happen between the drones used in a schedule.
- Find the “handoff” points when drone i_m hands over the package to drone i_{m+1} for all $m \leq k - 1$ ¹

This category of problems is a generalization of computing shortest paths in \mathbb{R}^2 between two points. As far as we know such problems have not been considered before in the operations research or computational geometry literature; it is, however, reminiscent of the Weighted Region Problem [2] (henceforth abbreviated as WRP) where one needs to figure out how to compute a shortest *weighted* path between two points in the plane that has been partitioned into convex polygonal regions, each associated with a constant multiplicative weight for scaling the euclidean distance between two points *within* that region.

The distinctive feature of this problem and its generalizations is figuring out how to make multiple agents of *varying* capabilities located at different points in \mathbb{R}^2 (such as maximum capable speed, battery capacity, tethering constraints etc.) *cooperate* in transporting one or more packages most efficiently from their given sources to their target destinations.

While we are framing these problems in terms of drones, one can also apply this problem in routing a fleet of taxis to get passengers from their pickup to their dropoff locations. Interesting problems might arise in this scenario itself (e.g. what if the sequence of pickup and dropoff locations for passengers happen in an online manner, say when passengers request or cancel rides with their smartphones?) We leave the investigation of these latter fascinating problems for future work. All problems considered in this article are in the offline setting.

¹The final drone i_k in the schedule flies with the package to the target site T

Each chapter in this document is devoted to developing algorithms for a specific variant of the package handoff problem (henceforth abbreviated as PHO), beginning with the plain-vanilla single package handoff problem described above. For most algorithms we will also be giving implementations in Python described in a literate-programming style ² [3] using the NuWeb literate programming tool [4] for weaving and tangling the code-snippets.

You can check out the Package Handoff code from the following GitHub repository:

https://github.com/gtelang/PackageHandoff_Python

The README file in the repository gives instructions on how to run the code and any of the associated experiments.

²Which essentially means you will see code-snippets interleaved with the actual explanation of the algorithms. The code snippets are then extracted using a literate programming tool (using a so-called a “weaver” and “tangler”) into an executable Python program

Chapter 2

Single Package Handoff

In this chapter, we consider the problem posed at the beginning of the Overview chapter. For convenience we state the problem again below

Given the positions P_i of n drones (labelled 1 through n) in \mathbb{R}^2 each capable of a maximum speed of $u_i \geq 0$. Also given is a package present at S that needs to get to T . Each drone is capable of picking up the package and flying with speed u_i to another point to hand the package off to another drone (which in turn hands the package off to another drone and so on).

Find the best way to coordinate the movement of the drones to get the package from S to T in the least possible time i.e. minimize the makespan of the delivery process.

Note that in the optimal schedule, it is easy to construct an example such that not all drones will necessarily participate in getting the package from S to T . The challenge is to figure out which subset of drones to use, along with the handoff points.

However, the following observations are crucial for the development of algorithms in this chapter.

- Lemma 1.**
1. *For the single delivery package handoff problem, a slower drone, always hands off the package to a faster drone, in any optimal schedule. Thus, once we know which drones participate in the schedule, the order in which they participate in the handoff from start to finish is determined according to their speeds, sorted from lowest to highest.*^a
 2. *All drones involved in the optimal schedule start moving at time $t = 0$ at full speed along a straight line towards a handoff point. The drones not involved can remain stationary since they don't participate in the package transport.*
 3. *No drone waits on any other drone at the rendezvous points in any optimal schedule. i.e. if two drones rendezvous at some point H , they arrive at H are precisely the same time on the clock.*
 4. *The path of the package is a monotonic piecewise straight polygonal curve with respect to the direction \overrightarrow{ST} no matter what the initial positions P_i or speeds u_i of the drones.*^b

^aThis property is unfortunately not true when there are multiple packages to be delivered to their respective destinations, even for the case where the sources and targets for all the packages are the same. Examples where this happens are given in the next chapter.

^bWe conjecture this property to be true even for the case of multiple packages i.e. the path of travel of each package is monotonic with respect to the vectors $S_i T_i$'s

Before proceeding, we first fix some notation:

- (P_i, u_i) for $1 \leq i \leq n$ where $P_i \in \mathbb{R}^2$ and $u_i \geq 0$, $S, T \in \mathbb{R}^2$ respectively stand for the initial positions, speed, and source and target points for a package.
- $(S = H_{i_0}), H_{i_1} \dots H_{i_k}$ for $0 \leq i_0, \dots, i_k \leq n$ stand for points where the drones with labels i_0, \dots, i_k handle the package in that order. More precisely H_{i_j} is the point where drone i_{j-1} hands off the package to drone i_j for $1 \leq j \leq k$.

Wavefront Algorithms

The algorithms in this section are inspired by the Continuous Dijkstra paradigm used in computing shortest paths for the Weighted Region Problem and for computing euclidean shortest paths in the presence of polygonal obstacles [2, 5]. The approximation and locality properties of these heuristics are considered later in the chapter.

The general idea is simple: consider expanding circular wavelets centered at the positions P_i , each expanding with speed u_i . The drones involved in the schedule are then calculated by observing how the wavelets interact in time. The various

heuristics differ according to how the subset of drones involved in the delivery process is figured out based on nature of the “wavefront” used to keep track of the current tentative location of the package.

Once this subset of drones is calculated, we use convex optimization (via the convex optimization modelling language CVXPY [6]) to figure out *exactly* the handoff points for the drones involved in transporting the package from the source to the destination.

Precise details follow in the subsections below.

2.1.1 Preliminary Data Structures

Before proceeding, let's design some housekeeping data-structures to represent the problem. The following data-structure simply maintains the information about the drones, the source and target used as input to the problem. To get a PHO tour for the package, algorithms are passed as first class values to the method `get_tour` of this class.

Note that each algorithm does its own plotting and animation in a separate matplotlib window if so requested via the boolean flags `plot_tour_p`, and `animate_tour_p`. If both animation and plotting are requested they are done in separate windows each.

⟨ *PHO Data Structures* 6 ⟩ ≡

```
class Single_PHO_Input:
    def __init__(self, drone_info = [] , source = None, target=None):
        self.drone_info = drone_info
        self.source      = source
        self.target      = target

    def get_drone_pis (self):
        return [self.drone_info[idx][0] for idx in range(len(self.drone_info)) ]

    def get_drone_uis (self):
        return [self.drone_info[idx][1] for idx in range(len(self.drone_info)) ]

    def get_tour(self, algo, animate_tour_p=False, plot_tour_p=False):
        return algo( self.drone_info,
                     self.source,
                     self.target,
                     animate_tour_p,
                     plot_tour_p    )

    # Methods for \verb|ReverseHorseflyInput|
    def clearAllStates (self):
        self.drone_info = []
        self.source = None
        self.target = None
```

◇

Fragment referenced in 26.

Defines: `Single_PHO_Input` 15, 18, 20, 22.

2.1.2 One-Dimensional Greedy Wavefront

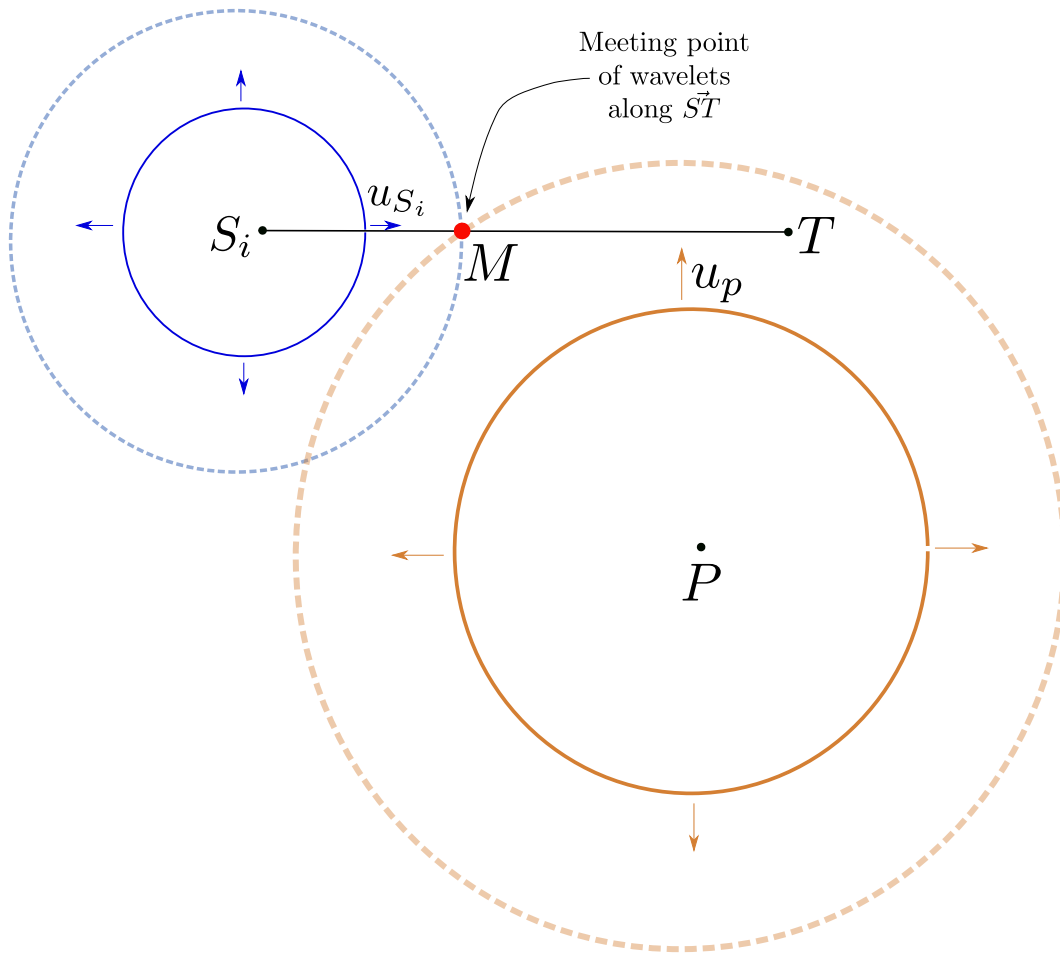


Figure 2.1: Intersection of two expanding wavelets along S_iT

The following function calculates the time taken for a drone to move between two points at a given uniform speed

$\langle PHO \text{ Algorithms } 7a \rangle \equiv$

```
def time_of_travel(start, stop, speed):
    start = np.asarray(start)
    stop = np.asarray(stop)
    return np.linalg.norm(stop-start)/speed
```

◇

Fragment defined by 7ab, 10, 11, 13, 14.

Fragment referenced in 26.

Defines: time_of_travel 7b, 14.

$\langle PHO \text{ Algorithms } 7b \rangle \equiv$

```
def algo_odw(drone_info, source, target,
             animate_tour_p = False,
             plot_tour_p = False):

    from scipy.optimize import minimize

    source = np.asarray(source)
    target = np.asarray(target)
    sthat = (target-source)/np.linalg.norm(target-source) # unit vector pointing from source to target

    numdrones = len(drone_info)
```

```

clock_time = 0.0

# Find the drone which can get to the source the quickest
tmin = np.inf
imin = None
for idx in range(numdrones):
    initdroneposn = drone_info[idx][0]
    dronespeed    = drone_info[idx][1]
    tmin_idx = time_of_travel(initdroneposn, source, dronespeed)

    if tmin_idx < tmin:
        tmin = tmin_idx
        imin = idx

clock_time = tmin

current_package_handler_idx = imin
current_package_position    = source

drone_pool = range(numdrones)
drone_pool.remove(imin)
used_drones = [imin]

package_trail_straight = [current_package_position]

package_reached_p = False
while not(package_reached_p):

    time_to_target_without_help = \
        np.linalg.norm((target-current_package_position))/drone_info[current_package_handler_idx][1]

    tI_min = np.inf
    idx_tI_min = None
    for idx in drone_pool:

        us = drone_info[current_package_handler_idx][1]
        up = drone_info[idx][1]

        if up <= us: # slower drones are useless, so skip rest of the iteration
            continue
        else:
            s = current_package_position
            p = np.asarray(drone_info[idx][0])

            tI = get_interception_time(s, us, p, up, target, clock_time)

            if tI < tI_min:
                tI_min = tI
                idx_tI_min = idx

    if time_to_target_without_help < tI_min :
        package_reached_p = True
        package_trail_straight.append(target)

    else:
        package_handler_speed = drone_info[current_package_handler_idx][1]
        current_package_position = current_package_position + package_handler_speed * (tI_min - clock_time) * sthat
        package_trail_straight.append(current_package_position)

        clock_time = tI_min
        current_package_handler_idx = idx_tI_min

        drone_pool.remove(idx_tI_min)

```



```

        used_drones.append(idx_tI_min)

package_trail_cvx = algo_pho_exact_given_order_of_drones ([drone_info[idx] for idx in used_drones],source,target )
mspan_straight = makespan(drone_info, used_drones, package_trail_straight)
mspan_cvx      = makespan(drone_info, used_drones, package_trail_cvx)

if plot_tour_p:
    fig0, ax0 = plt.subplots()
    plot_tour(fig0, ax0, "ODW: Straight Line"          , source, target, drone_info, used_drones, package_trail)

    fig1, ax1 = plt.subplots()
    plot_tour(fig1, ax1, "ODE: Straight Line, Post Convex Optimization", source, target, drone_info, used_drones, package_
    plt.show()

if animate_tour_p:
    #ptraj = zip(package_trail_cvx, used_drones + [None])
    animate_tour(drone_info, [package_trail] , used_drones,
                animation_file_name_prefix='package_handoff_animation.mp4',
                algo_name='odw',
                render_trajectory_trails_p=True)

return used_drones, package_trail_straight, mspan_straight, package_trail_cvx, mspan_cvx

```

◇

Fragment defined by [7ab](#), [10](#), [11](#), [13](#), [14](#).

Fragment referenced in [26](#).

Defines: `algo_odw` [15](#), [18](#), [20](#), [22](#).

Uses: `time_of_travel` [7a](#).

```

def extract_coordinates(points):

    xs, ys = [], []
    for pt in points:
        xs.append(pt[0])
        ys.append(pt[1])
    return np.asarray(xs), np.asarray(ys)

def get_interception_time(s, us, p, up, t, t0) :

    t_m = t - s # the _m subscript stands for modify
    t_m = t_m / np.linalg.norm(t_m) # normalize to unit

    # For rotating a vector clockwise by theta,
    # to get the vector t_m into alignment with (1,0)
    costh = t_m[0]/np.sqrt(t_m[0]**2 + t_m[1]**2)
    sinth = t_m[1]/np.sqrt(t_m[0]**2 + t_m[1]**2)

    rotmat = np.asarray([[costh, sinth],
                          [-sinth, costh]])

    assert np.linalg.norm((rotmat.dot(t_m) - np.asarray([1,0]))) <= 1e-6,\
        "Rotation matrix did not work properly. t_m should get rotated onto [1,0] after this transformation"

    p_shift = p - s
    p_rot = rotmat.dot(p_shift)
    [alpha, beta] = p_rot

    # Solve quadratic documented in the snippets above
    groots = np.roots([ (1.0/us**2 - 1.0/up**2),
                        2*t0/us + 2*alpha/up**2 ,
                        t0**2 - alpha**2/up**2 - beta**2/up**2])

    # The quadratic should always a root.
    groots = np.real(groots) # in case the imaginary parts of the roots are really small,
    groots.sort()

    x = None
    for root in groots:
        if root > 0.0:
            x = root
            break
    assert abs(x/us+t0 - np.sqrt((x-alpha)**2 + beta**2)/up) <= 1e-6 , "Quadratic not solved perfectly"

    tI = x/us + t0
    return tI


```

◇

Fragment defined by [7ab](#), [10](#), [11](#), [13](#), [14](#).Fragment referenced in [26](#).

When the drones involved in the package handoff process, along with the order of handoff is known in advance, we can find the handoff points exactly using convex optimization using SOCP.

Handoff in a particular order

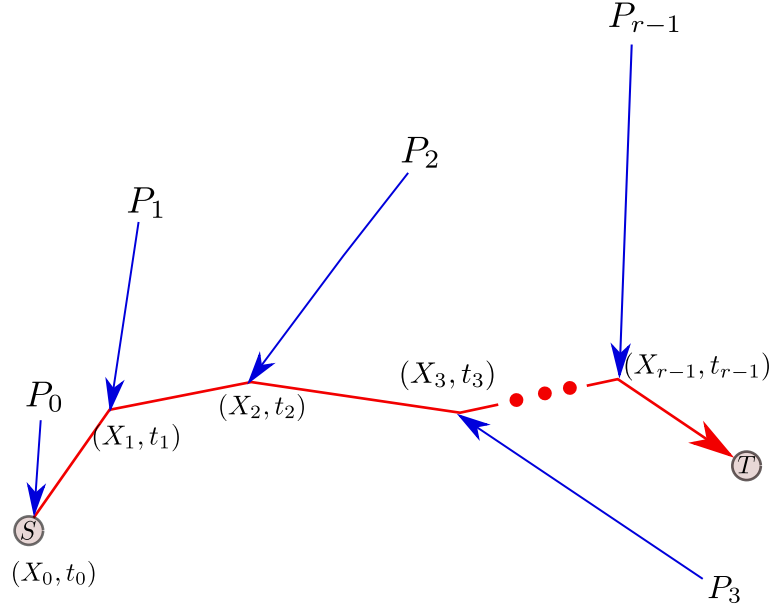

Given drones P_i , with speeds u_i $1 \leq i \leq r-1$, the initial position S and final destination T for the package. The drones are expected to transport the package by handing of the package in the order $1, 2, \dots, r$. Let t_i denote the departure time on a global clock from the i 'th handoff point X_i .

Then the minimum time for transporting the package and the handoff points can be calculated according to the following convex program

$$\begin{aligned}
 & \min_{t_i, X_i} \quad t_{r-1} + \frac{\|T - X_{r-1}\|}{u_{r-1}} \\
 & \text{subject to the constraints} \\
 & \quad X_0 = S \\
 & \quad t_i \geq \frac{\|P_i - X_i\|}{u_i} \quad 0 \leq i \leq r-1 \\
 & \quad t_i + \frac{\|X_{i+1} - X_i\|}{u_i} \leq t_{i+1} \quad 0 \leq i \leq r-2
 \end{aligned}$$

The following function is just an implentation of the program above.

$\langle \text{PHO Algorithms 11} \rangle \equiv$

```
def algo_pho_exact_given_order_of_drones ( drone_info, source, target ):
    import cvxpy as cp

    source = np.asarray(source)
    target = np.asarray(target)

    r = len(drone_info)
    source = np.asarray(source)
    target = np.asarray(target)

    # Variables for rendezvous points of robot with package
    X, t = [], []
```

```

for i in range(r):
    X.append(cp.Variable(2)) # vector variable
    t.append(cp.Variable( )) # scalar variable

# Constraints
constraints_S = [ X[0] == source ]

constraints_I = []
for i in range(r):
    constraints_I.append( 0.0 <= t[i] )
    constraints_I.append( t[i] >= cp.norm( np.asarray(drone_info[i][0]) - X[i] ) / drone_info[i][1] )

constraints_L = []
for i in range(r-1):
    constraints_L.append( t[i] + cp.norm(X[i+1] - X[i])/drone_info[i][1] <= t[i+1] )

objective = cp.Minimize( t[r-1] + cp.norm( target - X[r-1] )/drone_info[r-1][1] )

prob = cp.Problem(objective, constraints_S + constraints_I + constraints_L)
print Fore.CYAN
prob.solve(solver=cp.SCS,verbose=True)
print Style.RESET_ALL

package_trail = [ np.asarray(X[i].value) for i in range(r) ] + [ target ]
return package_trail

```

◇


Fragment defined by [7ab](#), [10](#), [11](#), [13](#), [14](#).

Fragment referenced in [26](#).

Plotting

We plot the tours onto a separate window if the switch `plot_tour_p` is set to `True` while calling the algorithm. The path of the package is shown in bold red. The paths of the drones from their initial positions to the point where they pick up the package from another drone are shown in blue.

An example is shown below:

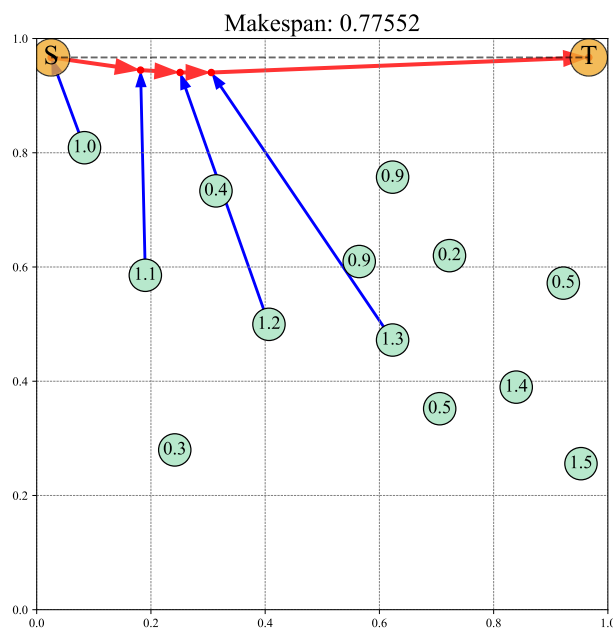

```

def plot_tour(fig, ax, figtitle, source, target,
             drone_info, used_drones, package_trail,
             xlims=[0,1],
             ylims=[0,1],
             aspect_ratio=1.0,
             speedfontsize=4,
             speedmarkersize=10,
             sourcetargetmarkerfontsize=4,
             sourcetargetmarkersize=10 ):

    import matplotlib.ticker as ticker
    ax.set_aspect(aspect_ratio)
    ax.set_xlim(xlims)
    ax.set_ylim(ylims)

    plt.rc('font', family='serif')

    # Draw the package trail
    xs, ys = extract_coordinates(package_trail)
    ax.plot(xs,ys, 'ro', markersize=5 )
    for idx in range(len(xs)-1):
        plt.arrow( xs[idx], ys[idx], xs[idx+1]-xs[idx], ys[idx+1]-ys[idx],
                  **{'length_includes_head': True,
                     'width': 0.007 ,
                     'head_width':0.01,
                     'fc': 'r',
                     'ec': 'none',
                     'alpha': 0.8})

    # Draw the source, target, and initial positions of the robots as bold dots
    xs,ys = extract_coordinates([source, target])
    ax.plot(xs,ys, 'o', markersize=sourcetargetmarkersize, alpha=0.8, ms=10, mec='k', mfc='#F1AB30' )
    #ax.plot(xs,ys, 'k--', alpha=0.6 ) # light line connecting source and target

    ax.text(source[0], source[1], 'S', fontsize=sourcetargetmarkerfontsize,\
            horizontalalignment='center',verticalalignment='center')
    ax.text(target[0], target[1], 'T', fontsize=sourcetargetmarkerfontsize,\
            horizontalalignment='center',verticalalignment='center')

    xs, ys = extract_coordinates( [ drone_info[idx][0] for idx in range(len(drone_info)) ] )
    ax.plot(xs,ys, 'o', markersize=speedmarkersize, alpha = 0.5, mec='None', mfc='#b7e8cc' )

    # Draw speed labels
    for idx in range(len(drone_info)):
        ax.text( drone_info[idx][0][0], drone_info[idx][0][1], format(drone_info[idx][1],'.3f'),
                fontsize=speedfontsize, horizontalalignment='center', verticalalignment='center' )

    # Draw drone path from initial position to interception point
    for pt, idx in zip(package_trail, used_drones):
        initdroneposn = drone_info[idx][0]
        handoffpoint = pt

        xs, ys = extract_coordinates([initdroneposn, handoffpoint])
        plt.arrow( xs[0], ys[0], xs[1]-xs[0], ys[1]-ys[0],
                  **{'length_includes_head': True,
                     'width': 0.005 ,
                     'head_width':0.02,
                     'fc': 'b',

```

```

        'ec': 'none'})

fig.suptitle(figtitle, fontsize=15)
ax.set_title('\nMakespan: ' + format(makespan(drone_info, used_drones, package_trail), '.5f'), fontsize=8)

startx, endx = ax.get_xlim()
starty, endy = ax.get_ylim()

ax.tick_params(which='both', # Options for both major and minor ticks
               top='off', # turn off top ticks
               left='off', # turn off left ticks
               right='off', # turn off right ticks
               bottom='off') # turn off bottom ticks

# Customize the major grid
ax.grid(which='major', linestyle='-', linewidth='0.1', color='red')
ax.grid(which='minor', linestyle=':', linewidth='0.1', color='black')

#ax.xaxis.set_ticks(np.arange(startx, endx, 0.4))
#ax.xaxis.set_major_formatter(ticker.FormatStrFormatter('%0.1f'))

#ax.yaxis.set_ticks(np.arange(starty, endy, 0.4))
#ax.yaxis.set_major_formatter(ticker.FormatStrFormatter('%0.1f'))

plt.yticks(fontsize=5, rotation=90)
plt.xticks(fontsize=5)

# A light grid
plt.grid(color='0.5', linestyle='--', linewidth=0.5)

```

Fragment defined by [7ab](#), [10](#), [11](#), [13](#), [14](#).
Fragment referenced in [26](#).

By makespan, we mean the time taken for the package to travel from S to T .

\langle *PHO Algorithms 14* $\rangle \equiv$

```

def makespan(drone_info, used_drones, package_trail):

    assert len(package_trail) == len(used_drones)+1, ""

    makespan = 0.0
    counter = 0
    for idx in used_drones:
        dronespeed = drone_info[idx][1]

        makespan += time_of_travel(package_trail[counter],\
                                   package_trail[counter+1],
                                   dronespeed)

        counter += 1

    return makespan

```

Fragment defined by [7ab](#), [10](#), [11](#), [13](#), [14](#).
Fragment referenced in [26](#).
Uses: `time_of_travel` [7a](#).

Run Handler associated with this Chapter

⟨ *PHO Run Handlers 15* ⟩ ≡

```
def single_pho_run_handler():
    import random
    def wrapperEnterRunPoints(fig, ax, run):
        def _enterPoints(event):
            if event.name == 'button_press_event' and \
               (event.button == 1 or event.button == 3) and \
               event.dblclick == True and event.xdata != None and event.ydata != None:

                if event.button == 1:
                    # Insert blue circle representing the initial position of a drone
                    print Fore.GREEN
                    newPoint = (event.xdata, event.ydata)
                    speed = float(raw_input('What speed do you want for the drone at '+str(newPoint)))
                    run.drone_info.append( (newPoint, speed) )
                    patchSize = (xlim[1]-xlim[0])/40.0
                    print Style.RESET_ALL

                    ax.add_patch( mpl.patches.Circle( newPoint, radius = patchSize,
                                                       facecolor='#b7e8cc', edgecolor='black' ))

                    ax.text( newPoint[0], newPoint[1], speed, fontsize=15,
                           horizontalalignment='center', verticalalignment='center' )

                    ax.set_title('Number of drones inserted: ' +\
                                str(len(run.drone_info)), fontdict={'fontsize':25})

                elif event.button == 3:
                    # Insert big red circles representing the source and target points
                    patchSize = (xlim[1]-xlim[0])/50.0
                    if run.source is None:
                        run.source = (event.xdata, event.ydata)
                        ax.add_patch( mpl.patches.Circle( run.source, radius = patchSize,
                                                           facecolor= 'ffd9d6', edgecolor='black', lw=1.0 ))
                        ax.text( run.source[0], run.source[1], 'S', fontsize=15,
                               horizontalalignment='center', verticalalignment='center' )

                    elif run.target is None:
                        run.target = (event.xdata, event.ydata)
                        ax.add_patch( mpl.patches.Circle( run.target, radius = patchSize,
                                                           facecolor= 'ffd9d6', edgecolor='black', lw=1.0 ))
                        ax.text( run.target[0], run.target[1], 'T', fontsize=15,
                               horizontalalignment='center', verticalalignment='center' )

                    else:
                        print Fore.RED, "Source and Target already set", Style.RESET_ALL
                    # Clear polygon patches and set up last minute \verb|ax| tweaks
                    clearAxPolygonPatches(ax)
                    applyAxCorrection(ax)
                    fig.canvas.draw()
        return _enterPoints

# The key-stack argument is mutable! I am using this hack to my advantage.
def wrapperkeyPressHandler(fig, ax, run):
    def _keyPressHandler(event):
        if event.key in ['i', 'I']:

            # Select algorithm to execute
            algo_str = raw_input(Fore.YELLOW
```

+\\

```

        "Enter algorithm to be used to compute the tour:\n Options are:\n" +\
        " (odw)      One Dimensional Wavefront \n" +\
        Style.RESET_ALL)

    algo_str = algo_str.lstrip()

    # Incase there are patches present from the previous clustering, just clear them
    clearAxPolygonPatches(ax)
    if algo_str == 'odw':
        tour = run.get_tour( algo_odw )
    else:
        print "Unknown option. No horsefly for you! ;-D "
        sys.exit()
    applyAxCorrection(ax)
    fig.canvas.draw()

    elif event.key in ['c', 'C']:
        # Clear canvas and states of all objects
        run.clearAllStates()
        ax.cla()

        applyAxCorrection(ax)
        ax.set_xticks([])
        ax.set_yticks([])

        fig.texts = []
        fig.canvas.draw()
    return _keyPressHandler

# Set up interactive canvas
fig, ax = plt.subplots()
run = Single_PHO_Input()

from matplotlib import rc

# specify the custom font to use
plt.rcParams['font.family'] = 'sans-serif'
plt.rcParams['font.sans-serif'] = 'Times New Roman'

ax.set_xlim([xlim[0], xlim[1]])
ax.set_ylim([ylim[0], ylim[1]])
ax.set_aspect(1.0)
ax.set_xticks([])
ax.set_yticks([])

ax.set_title("Enter drone positions, source and target onto canvas. \n \
(Enter speeds into the terminal, after inserting a drone at a particular position)")

mouseClick = wrapperEnterRunPoints (fig,ax, run)
fig.canvas.mpl_connect('button_press_event' , mouseClick)

keyPress = wrapperkeyPressHandler(fig,ax, run)
fig.canvas.mpl_connect('key_press_event', keyPress )

plt.show()

```

◇

Fragment referenced in [26](#).

Defines: `single_pho_run_handler` [26](#).

Uses: `algo_odw` [7b](#), `Single_PHO_Input` [6](#).

Chapter 3

Experiments

Single Package Handoff

3.1.1 Experiment 1: Comparing Makespans of various heuristics for randomly generated instances

```

def experiment_1():
    # generate the experiments folder
    import shutil
    import os
    import random
    from datetime import datetime
    import yaml

    #random.seed(6)
    random.seed(7)

    # Uniform random points
    source_init = np.asarray([-1.0,0])
    target_init = np.asarray([ 1.0,0])

    exsize = 100
    exreps = 5
    dtheta = 2.0*np.pi/exreps

    dir = 'pho_experiment_1' + '_exsize_' + str(exsize)
    if os.path.exists(dir):
        shutil.rmtree(dir)

    os.makedirs(dir)

    xs = [ random.uniform(-1,1) for _ in range(exsize) ]
    ys = [ random.uniform(-1,1) for _ in range(exsize)]

    initdroneposns = map(np.asarray, zip(xs,ys))
    utils_algo.print_list(initdroneposns)

    speeds = [random.uniform(0.01,1.) for _ in range(exsize)]

    drone_info = zip(initdroneposns, speeds)

    for idx in range(exreps):

        th = idx * dtheta
        costh = np.cos(th)
        sinth = np.sin(th)

        rotmat = np.asarray([[costh, sinth],
                             [-sinth, costh]])

        source = rotmat.dot(source_init)
        target = rotmat.dot(target_init)

        run = Single_PHO_Input(drone_info, source, target)

        # Execute the algorithm and unpack the data
        used_drones, \
        package_trail_straight, \
        mspan_straight, \
        package_trail_cvx, \
        mspan_cvx = run.get_tour(algo_odw,
                                animate_tour_p = False,
                                plot_tour_p = False )

        trivial_lower_bound = np.linalg.norm(target-source)/max(speeds)

        print "Used Drones: " , used_drones
        print "\n"
        print Fore.CYAN, "Package Trail Straight: " , Style.RESET_ALL
        utils_algo.print_list(package_trail_straight)
        print "\n"
        print Fore.CYAN, "Package Trail CVX: ", Style.RESET_ALL
        utils_algo.print_list(package_trail_cvx)

```

3.1.2 Experiment 2: Dragging the pho curve as far as possible

```

def experiment_2():
    import shutil
    import os
    import random
    from datetime import datetime
    import yaml

    random.seed(7)

    source = np.asarray([0.1,0])
    target = np.asarray([1,0])

    # Basic copy
    numdrones_bas = 30

    xs0 = [0.101 for idx in range(numdrones_bas)]
    ys0 = [(idx+1)/float(numdrones_bas) for idx in range(numdrones_bas)]
    speeds0 = [1.1 - (idx+1)/float(1.1*numdrones_bas) for idx in range(numdrones_bas)]
    speeds0.reverse()

    xs = xs0
    ys = ys0
    speeds = speeds0

    initdroneposns = map(np.asarray, zip(xs,ys))
    drone_info = zip(initdroneposns, speeds)

    run = Single_PHO_Input(drone_info, source, target)

    # Execute the algorithm and unpack the data
    used_drones, \
    package_trail_straight, \
    mspan_straight, \
    package_trail_cvx, \
    mspan_cvx = run.get_tour(algo_odw,
                            animate_tour_p = False,
                            plot_tour_p = False )

    trivial_lower_bound = np.linalg.norm(target-source)/max(speeds)

    print "Used Drones: " , used_drones
    print "\n"
    print Fore.CYAN, "Package Trail Straight: " , Style.RESET_ALL
    utils_algo.print_list(package_trail_straight)
    print "\n"
    print Fore.CYAN, "Package Trail CVX: ", Style.RESET_ALL
    utils_algo.print_list(package_trail_cvx)

    print Fore.RED, "mspan_straight: ", mspan_straight, "\n mspan_cvx:      ", mspan_cvx, Style.RESET_ALL
    print "Dilation Factor:(CVX to Straight) ", mspan_straight/mspan_cvx
    print ""
    print "CVX Solution within: ", Fore.CYAN, mspan_cvx/trivial_lower_bound , Style.RESET_ALL, " of optimum"

    eps = 1e-1
    fig, ax = plt.subplots()
    plot_tour(fig, ax, "Package Handoff: Bending Behavior",
              source, target, drone_info, used_drones,
              package_trail_cvx,
              xlims=[-eps,1+eps],
              ylims=[-eps,1+eps],
              aspect_ratio=1.0,
              speedfontsize=1,
              speedmarkersize=4,
              sourcetargetmarkersize=19,
              sourcetargetmarkerfontsize=14)
    plt.show()

```

3.1.3 Experiment 3: Making the curve as wiggly as possible

How many times can the convexity of the curve change?

```

def experiment_3():
    import shutil
    import os
    import random
    from datetime import datetime
    import yaml

    random.seed(7)
    eps = 1e-1

    source = np.asarray([0.1, 0.5])
    target = np.asarray([1.0, 0.5])

    numdrones = 100

    config = 'bendy'

    if config == 'menorah':
        speeds = []
        xs = []
        ys = []

        for idx in range(numdrones):
            xs.append(0.1)
            ys.append( 0.5+(-1.07)**idx * 0.001 )
            speeds.append((idx+1)/float(40*numdrones))
        figtitle="Package Handoff: Many Inflection Points"

    elif config == 'bendy':
        # Basic copy
        numdrones_bas = 15

        xs0 = [0.101 for idx in range(numdrones_bas)]
        ys0 = [0.5 + (idx+1)/float(2*numdrones_bas) for idx in range(numdrones_bas)]
        speeds0 = [1.1 - (idx+1)/float(1.2*numdrones_bas) for idx in range(numdrones_bas)]
        speeds0.reverse()

        xs1 = [0.6 + (idx+1)/float(1.5*numdrones_bas) for idx in range(numdrones_bas)]
        ys1 = [1.0 - idx/float(1000000.0*numdrones_bas) for idx in range(numdrones_bas)]
        speeds1 = [1.04 + (idx+1)/float(3*numdrones_bas) for idx in range(numdrones_bas)]

        xs = xs0 + xs1
        ys = ys0 + ys1
        speeds = speeds0 + speeds1

        figtitle="Bendy"

    initdroneposns = map(np.asarray, zip(xs,ys))
    drone_info = zip(initdroneposns, speeds)

    run = Single_PHO_Input(drone_info, source, target)

    # Execute the algorithm and unpack the data
    used_drones, \
    package_trail_straight, \
    mspan_straight, \
    package_trail_cvx, \
    mspan_cvx = run.get_tour(algo_odw,
                            animate_tour_p = False,
                            plot_tour_p = False )

```

Chapter Index of Fragments

⟨ PHO Algorithms [7ab](#), [10](#), [11](#), [13](#), [14](#) ⟩ Referenced in [26](#).

⟨ PHO Data Structures [6](#) ⟩ Referenced in [26](#).

⟨ PHO Experiments [18](#), [20](#), [22](#) ⟩ Referenced in [26](#).

⟨ PHO Run Handlers [15](#) ⟩ Referenced in [26](#).

Chapter Index of Identifiers

algo_odw: [7b](#), [15](#), [18](#), [20](#), [22](#).

Single_PHO_Input: [6](#), [15](#), [18](#), [20](#), [22](#).

single_pho_run_handler: [15](#), [26](#).

time_of_travel: [7a](#), [7b](#), [14](#).

Bibliography

- [1] “France has started the drone mail carrier | earth chronicles news.” <http://earth-chronicles.com/science/france-has-started-the-drone-mail-carrier.html>. (Accessed on 09/01/2019). 3
- [2] J. S. Mitchell and C. H. Papadimitriou, “The weighted region problem: finding shortest paths through a weighted planar subdivision,” *Journal of the ACM (JACM)*, vol. 38, no. 1, pp. 18–73, 1991. 3, 5
- [3] D. E. Knuth, “Literate programming,” *The Computer Journal*, vol. 27, no. 2, pp. 97–111, 1984. 4
- [4] P. Briggs, J. D. Ramsdell, and M. W. Mengel, “Nuweb version 1.0 b1: A simple literate programming tool,” 2001. 4
- [5] J. S. Mitchell, “Shortest paths among obstacles in the plane,” *International Journal of Computational Geometry & Applications*, vol. 6, no. 03, pp. 309–332, 1996. 5
- [6] S. Diamond and S. Boyd, “Cvxpy: A python-embedded modeling language for convex optimization,” *The Journal of Machine Learning Research*, vol. 17, no. 1, pp. 2909–2913, 2016. 6
- [7] E. L. Lawler, J. K. Lenstra, A. H. Rinnooy Kan, and D. B. Shmoys, “The traveling salesman problem; a guided tour of combinatorial optimization,” 1985.

Appendices

Appendix A

Supporting Code

Main File

"../src/pho-main.py" 26≡

```
# Relevant imports for Package Handoff

from colorama import Fore, Style
from matplotlib import rc
from scipy.optimize import minimize
from sklearn.cluster import KMeans
import argparse
import inspect
import itertools
import logging
import math
import matplotlib as mpl
import matplotlib.pyplot as plt
import numpy as np
import os
import pprint as pp
import randomcolor
import sys
import time
import utils_algo
import utils_graphics

< PHO Data Structures 6 >
< PHO Algorithms 7a, ... >
< PHO Run Handlers 15 >
< PHO Experiments 18, ... >

# Set up logging information relevant to this module
logger=logging.getLogger(__name__)
logging.basicConfig(level=logging.DEBUG)

def debug(msg):
    frame,filename,line_number,function_name,lines,index=inspect.getouterframes(
        inspect.currentframe())[1]
    line=lines[0]
    indentation_level=line.find(line.lstrip())
    logger.debug('{i} [{m}]'.format(
        i=' '*indentation_level, m=msg))

def info(msg):
    frame,filename,line_number,function_name,lines,index=inspect.getouterframes(
        inspect.currentframe())[1]
    line=lines[0]
    indentation_level=line.find(line.lstrip())
    logger.info('{i} [{m}]'.format(
```

```

        i='.*indentation_level, m=msg))

xlim, ylim = [0,1], [0,1]

def applyAxCorrection(ax):
    ax.set_xlim([xlim[0], xlim[1]])
    ax.set_ylim([ylim[0], ylim[1]])
    ax.set_aspect(1.0)

def clearPatches(ax):
    # Get indices cooresponding to the polygon patches
    for index , patch in zip(range(len(ax.patches)), ax.patches):
        if isinstance(patch, mpl.patches.Polygon) == True:
            patch.remove()
    ax.lines[:]=[]
    applyAxCorrection(ax)

def clearAxPolygonPatches(ax):

    # Get indices cooresponding to the polygon patches
    for index , patch in zip(range(len(ax.patches)), ax.patches):
        if isinstance(patch, mpl.patches.Polygon) == True:
            patch.remove()
    ax.lines[:]=[]
    applyAxCorrection(ax)

#####
#### Buggy don't use!
#####

def animate_tour(drone_info,
                 package_trajectories,
                 used_drones,
                 animation_file_name_prefix,
                 algo_name,
                 render_trajectory_trails_p = True):
    import matplotlib.animation as animation
    from matplotlib.patches import Circle

    # Set up configurations and parameters for all necessary graphics
    plt.rc('text', usetex=True)
    plt.rc('font', family='serif')

    fig, ax = plt.subplots()
    ax.set_xlim([0,1])
    ax.set_ylim([0,1])
    ax.set_aspect('equal')

    ax.set_xticks(np.arange(0, 1, 0.1))
    ax.set_yticks(np.arange(0, 1, 0.1))

    # Turn on the minor TICKS, which are required for the minor GRID
    ax.minorticks_on()

    # customize the major grid
    ax.grid(which='major', linestyle='--', linewidth='0.3', color='red')

    # Customize the minor grid
    ax.grid(which='minor', linestyle=':', linewidth='0.3', color='black')

    ax.get_xaxis().set_ticklabels([])
    ax.get_yaxis().set_ticklabels([])

```

```

number_of_drones = len(used_drones) # A drone trajectory consists of the id of the drone, followed by the actual trajectory
number_of_packages = len(package_trajectories)
colors           = utils_graphics.get_colors(number_of_packages, lightness=0.5)
ims              = []

# Constant for discretizing each segment inside the trajectories of the packages and drones
NUM_SUB_LEGS     = 50 # Number of subsegments within each segment of every trajectory

# Arrays keeping track of the states of the packages
packages_reached_endpt_p = [False for i in range(number_of_packages)]
packages_traj_num_legs    = [len(traj)-1 for traj in package_trajectories] # the -1 is because the initial position
packages_current_leg_idx  = [0 for i in range(number_of_packages)]
packages_current_subleg_idx = [0 for i in range(number_of_packages)]
packages_current_posn     = [traj[0] for traj in package_trajectories]

# Arrays keeping track of the states of the drones
drones_reached_rendz_p = [False for i in range(number_of_drones)]
drones_current_subleg_idx = [0 for i in range(number_of_drones)]
drones_current_posn     = [drone_info[idx][0] for idx in used_drones]

ptraj = package_trajectories[0]
drones_trajectories = zip(drones_current_posn, ptraj)

# The drone collection process ends, when all packages reach their endpoints
image_frame_counter = 0
while not(all(packages_reached_endpt_p)):

    #-----
    # Update the states of all the drones
    #-----
    for droidx in range(number_of_drones):
        if drones_reached_rendz_p[droidx] == False :
            dtraj = drones_trajectories[droidx]
            if drones_current_subleg_idx[droidx] <= NUM_SUB_LEGS-2:

                drones_current_subleg_idx[droidx] += 1 # subleg idx changes

            sublegidx = drones_current_subleg_idx[droidx] # shorthand for easier reference in the next two lines
            xcurr = np.linspace( dtraj[0][0], dtraj[1][0], NUM_SUB_LEGS+1 )[sublegidx]
            ycurr = np.linspace( dtraj[0][1], dtraj[1][1], NUM_SUB_LEGS+1 )[sublegidx]
            drones_current_posn[droidx] = [xcurr, ycurr]

        else:
            #drones_current_subleg_idx[droidx] = 0 # reset to 0

            xcurr, ycurr = dtraj[0][0], dtraj[0][1] # current position is the zeroth point on the next leg
            drones_current_posn[droidx] = [xcurr, ycurr]

            if drones_current_subleg_idx[droidx] == NUM_SUB_LEGS-1:
                drones_reached_rendz_p[droidx] = True

    #-----
    # Update the states of all the packages
    #-----
    for pkgidx in range(number_of_packages):
        #if packages_reached_endpt_p[pkgidx] == False:
        #if drones_reached_rendz_p[0] == True:
        #if np.linalg.norm( np.asarray(packages_current_posn[pkgidx]) - np.asarray(drones_current_posn[0]) ) < 0.001 :
            ptraj = package_trajectories[pkgidx]
            if packages_current_subleg_idx[pkgidx] <= NUM_SUB_LEGS-2:

```

```

        packages_current_subleg_idx[pkgidx] += 1      # subleg idx changes
        legidx    = packages_current_leg_idx[pkgidx] # the legidx remains the same

    sublegidx = packages_current_subleg_idx[pkgidx] # shorthand for easier reference in the next two lines
    xcurr = np.linspace( ptraj[legidx][0], ptraj[legidx+1][0], NUM_SUB_LEGS+1 )[sublegidx]
    ycurr = np.linspace( ptraj[legidx][1], ptraj[legidx+1][1], NUM_SUB_LEGS+1 )[sublegidx]
    packages_current_posn[pkgidx] = [xcurr, ycurr]

else:
    packages_current_subleg_idx[pkgidx] = 0 # reset to 0
    packages_current_leg_idx[pkgidx]    += 1 # you have passed onto the next leg
    legidx    = packages_current_leg_idx[pkgidx]

    xcurr, ycurr = ptraj[legidx][0], ptraj[legidx][1] # current position is the zeroth point on the next leg
    packages_current_posn[pkgidx] = [xcurr, ycurr]

    if packages_current_leg_idx[pkgidx] == packages_traj_num_legs[pkgidx]:
        packages_reached_endpt_p[pkgidx] = True

#-----
# Rendering
#-----
objs = []
# Render all the package trajectories upto this point in time.
for pkgidx in range(number_of_packages):
    traj          = package_trajectories[pkgidx]
    current_package_posn = packages_current_posn[pkgidx]

    if packages_current_leg_idx[pkgidx] != packages_traj_num_legs[pkgidx]: # the package is still moving

        xhs = [traj[k][0] for k in range(1+packages_current_leg_idx[pkgidx])] + [current_package_posn[0]]
        yhs = [traj[k][1] for k in range(1+packages_current_leg_idx[pkgidx])] + [current_package_posn[1]]

    else: # The package has stopped moving
        xhs = [x for (x,y) in traj]
        yhs = [y for (x,y) in traj]

    print "-----"
    print Fore.RED, "plotting package line", Style.RESET_ALL
    print "-----"
    packageline, = ax.plot(np.asarray(xhs), np.asarray(yhs), 'o-',
                           linewidth=5.0, markersize=10, alpha=0.8, color='#D13131')
    packageloc   = Circle( np.asarray([current_package_posn[0], current_package_posn[1]]), 0.015,
                           facecolor = '#D13131',
                           edgecolor='k',
                           alpha=1.00)
    packagepatch = ax.add_patch(packageloc)
    objs.append(packageline)
    objs.append(packagepatch)

# Render all the drone trajectories upto this point in time
for dridx in range(number_of_drones):
    traj          = drones_trajectories[dridx]
    current_drone_posn = drones_current_posn[dridx]

    if drones_current_subleg_idx[dridx] != NUM_SUB_LEGS-1 : # the drone is still moving

        xhs = [ traj[0][0] ] + [current_drone_posn[0]]
        yhs = [ traj[0][1] ] + [current_drone_posn[1]]

```

```

else: # The drone has stopped moving
    xhs = [x for (x,y) in traj]
    yhs = [y for (x,y) in traj]

    print "-----"
    print Fore.RED, "plotting drone line", Style.RESET_ALL
    print "-----"
    droneline, = ax.plot(np.asarray(xhs),np.asarray(yhs),'o-',
                        linewidth=5.0,markersize=10, alpha=0.8, color='g')
    droneloc = Circle( np.asarray([current_drone_posn[0], current_drone_posn[1]]), 0.015,
                      facecolor = 'g',
                      edgecolor='g',
                      alpha=1.00)
    dronepatch = ax.add_patch(droneloc)
    objs.append(droneline)
    objs.append(dronepatch)

    print "....."
    print "Appending to ims ", image_frame_counter
    ims.append(objs)
    image_frame_counter += 1

debug(Fore.CYAN + "\nStarted constructing ani object"+ Style.RESET_ALL)
ani = animation.ArtistAnimation(fig, ims, interval=200, blit=True)
debug(Fore.CYAN + "\nFinished constructing ani object"+ Style.RESET_ALL)

#debug(Fore.MAGENTA + "\nStarted writing animation to disk"+ Style.RESET_ALL)
#ani.save(animation_file_name_prefix+'.avi', dpi=100)
#debug(Fore.MAGENTA + "\nFinished writing animation to disk"+ Style.RESET_ALL)

plt.show()

```

```

if __name__=="__main__":
    #single_pho_run_handler()
    #experiment_1()
    #experiment_2()
    experiment_3()

```

◇

Uses: `single_pho_run_handler` [15](#).

Algorithmic Utilities

"../src/utlis_algo.py" 30≡

```

import numpy as np
import random
from colorama import Fore
from colorama import Style

def vector_chain_from_point_list(pts):
    vec_chain = []
    for pair in zip(pts, pts[1:]):

```

```

        tail= np.array (pair[0])
        head= np.array (pair[1])
        vec_chain.append(head-tail)

    return vec_chain

def length_polygonal_chain(pts):
    vec_chain = vector_chain_from_point_list(pts)

    acc = 0
    for vec in vec_chain:
        acc = acc + np.linalg.norm(vec)
    return acc

def pointify_vector (x):
    if len(x) % 2 == 0:
        pts = []
        for i in range(len(x))[::2]:
            pts.append( [x[i],x[i+1]] )
        return pts
    else :
        sys.exit('List of items does not have an even length to be able to be pointified')

def flatten_list_of_lists(l):
    return [item for sublist in l for item in sublist]

def print_list(xs):
    for x in xs:
        print x

def partial_sums( xs ):
    psum = 0
    acc = []
    for x in xs:
        psum = psum+x
        acc.append( psum )
    return acc

def are_site_orderings_equal(sites1, sites2):

    for (x1,y1), (x2,y2) in zip(sites1, sites2):
        if (x1-x2)**2 + (y1-y2)**2 > 1e-8:
            return False
    return True

def bunch_of_non_uniform_random_points(numpts):
    cluster_size = int(np.sqrt(numpts))
    numcenters = cluster_size

    import scipy
    import random
    centers = scipy.rand(numcenters,2).tolist()

    scale, points = 4.0, []
    for c in centers:
        cx, cy = c[0], c[1]
        # For current center $c$ of this loop, generate \verb|cluster_size| points uniformly in a square centered at it

        sq_size = min(cx,1-cx,cy, 1-cy)
        loc_pts_x = np.random.uniform(low=cx-sq_size/scale, high=cx+sq_size/scale, size=(cluster_size,))
        loc_pts_y = np.random.uniform(low=cy-sq_size/scale, high=cy+sq_size/scale, size=(cluster_size,))
        points.extend(zip(loc_pts_x, loc_pts_y))

    # Whatever number of points are left to be generated, generate them uniformly inside the unit-square

    num_remaining_pts = numpts - cluster_size * numcenters
    remaining_pts = scipy.rand(num_remaining_pts, 2).tolist()
    points.extend(remaining_pts)

```

```

    return points

def write_to_yaml_file(data, dir_name, file_name):
    import yaml
    with open(dir_name + '/' + file_name, 'w') as outfile:
        yaml.dump( data, outfile, default_flow_style = False)

```

◇

Graphical Utilities

"../src/utlils_graphics.py" 32≡

```

from matplotlib import rc
from colorama import Fore
from colorama import Style
from scipy.optimize import minimize
from sklearn.cluster import KMeans
import argparse
import itertools
import math
import matplotlib as mpl
import matplotlib.pyplot as plt
import numpy as np
import os
import pprint as pp
import randomcolor
import sys
import time

xlim, ylim = [0,1], [0,1]

# Borrowed from https://stackoverflow.com/a/9701141
import numpy as np
import colorsys

def get_colors(num_colors, lightness=0.2):
    colors=[]
    for i in np.arange(60., 360., 300. / num_colors):
        hue      = i/360.0
        saturation = 0.95
        colors.append(colorsys.hls_to_rgb(hue, lightness, saturation))
    return colors

```

◇