

Lecture 4

String in Java

Zonghua Gu (based on Jianchen Shan)
Department of Computer Science
Hofstra University

Lecture Goals

- Describe how Strings are represented in Java Platform
- Perform basic operations with Strings in Java
- Work with the String's built-in methods to manipulate Strings
- Write regular expressions to match patterns and split strings

Motivation Example



There is hereby imposed on the taxable income of every individual (other than a surviving spouse as defined in section 2(a) or the head of a household as defined in section 2(b)) who is not a married individual (as defined in section 7703) a tax determined in accordance with the following table:

Hard to read

26 U.S. Code § 1 – Tax imposed
<https://www.law.cornell.edu/uscode/text/26/1>

How do we quantify the difference?



If you are single, never lost your spouse, and not the head of a household, you pay taxes according to the following table:

Easy to read

Use **flesch score** to measure of text readability

Measure the Text Readability by Flesch Score

$$\text{FleschScore} = 206.835 - 1.015 \left(\frac{\text{number of words per sentence}}{\# \text{ sentences}} \right) - 84.6 \left(\frac{\text{number of syllables per word}}{\# \text{ syllables}} \right)$$

High score: Few words/sentence and few syllables/word

Low score: Many words/sentence and many syllables/word

longer word makes text harder to read than longer sentence

Document is represented as a big long **string**. Requires the ability to manipulate **Strings**!

Score	School level	Notes
100.00-90.00	5th grade	Very easy to read. Easily understood by an average 11-year-old student.
90.0-80.0	6th grade	Easy to read. Conversational English for consumers.
80.0-70.0	7th grade	Fairly easy to read.
70.0-60.0	8th & 9th grade	Plain English. Easily understood by 13- to 15-year-old students.
60.0-50.0	10th to 12th grade	Fairly difficult to read.
50.0-30.0	College	Difficult to read.
30.0-0.0	College graduate	Very difficult to read. Best understood by university graduates.

There is hereby imposed on the taxable income of every individual (other than a surviving spouse as defined in section 2(a) or section 2(b)) with a taxable income (as defined in section 7703) a tax determined in accordance with the following table:

FleshScore = 12.6

If you are single, married, widowed, or divorced, and not the head of a household, the tax is determined according to the following table:

FleshScore = 65.8

String Basics

```
String text1 = new String("Hello World!");
String text2 = text1;
String text3 = text1.concat("It's a great day.");
String text4 = text1 + "It's a great day.";
String text5 = "Hello World!";
String text6 = "Hello World!";
String text7 = new String("Hello World!");
text7.equals(text1); // true
text7 == text1; // false
```


String is an object

Strings are immutable


String append

Interned Strings: One object

Compare string



Java Heap

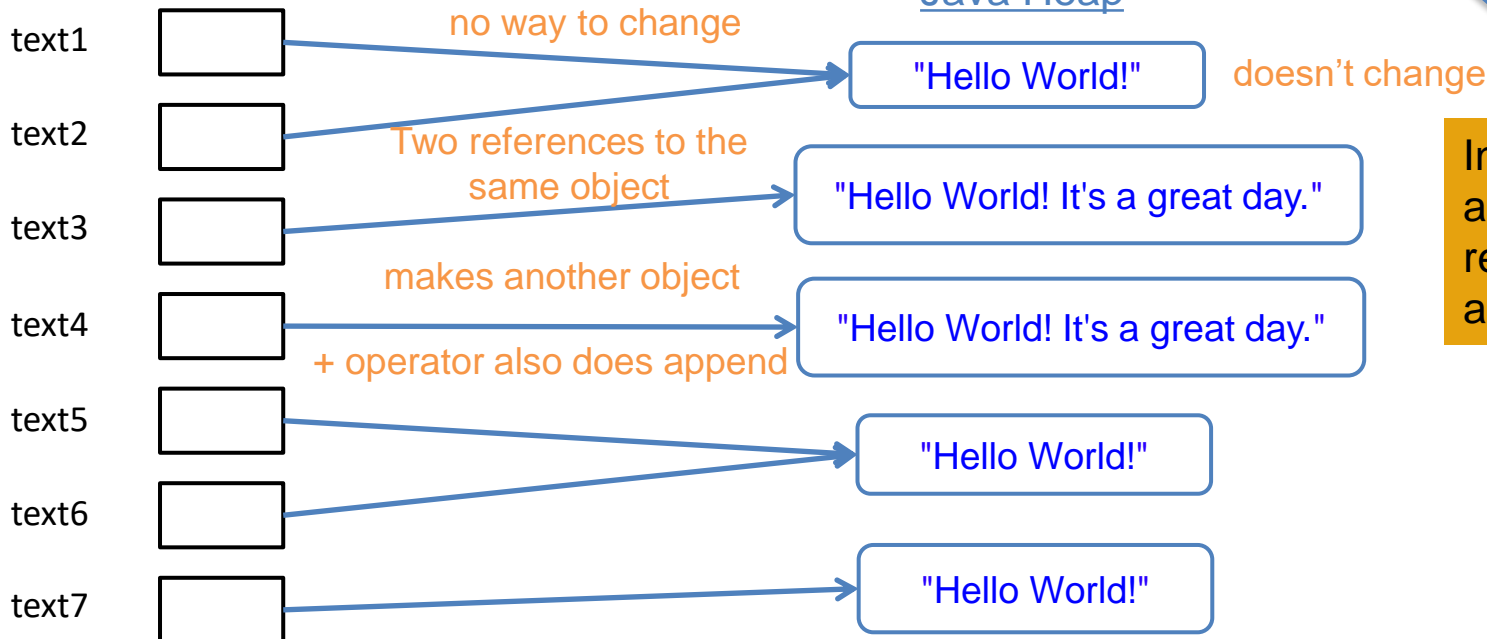

In heap, Strings are basically represented as arrays of chars

String Class's Built-in Methods

- Strings can do lots of things:
 - <https://docs.oracle.com/javase/10/docs/api/java/lang/String.html>
- Let's look at some methods in the context of our problems:
 - `length`, `charAt`, `toCharArray`, `indexOf`, `split`
- For example, we need to look at words, character by character, to calculate the number of syllables.

does the letter appear
anywhere in the word?

```
public static boolean hasLetter(String word, char letter)
{
    for (int i = 0; i < word.length(); i++) {
        if (word.charAt(i) == letter) {
            return true;
        }
    }
    return false;
}
```

If no letters match,
return false

`charAt(i)` cannot be
used to change the String

Loop over the indexes of character
array in the string

`length()` returns the number of
characters in the String

Get each letter and compare it to
the char in question

`charAt(i)` returns the char at
index `i` in the String

Count the number of syllables (Contd.)

```
public static boolean hasLetter(String word, char letter)
{
    for (char c: word.toCharArray()) {
        if (c == letter) {
            return true;
        }
    }
    return false;
}
```

int

Same method, using a for-each loop

toCharArray() returns the chars in a String, as a char[]

Change this method so that it returns the index where it first finds letter (or -1 if it doesn't find it)?

```
public static boolean hasLetter(String word, char letter)
{
    for (int i = 0; i < word.length(); i++) {
        if (word.charAt(i) == letter) {
            return true;
        }
    }
    return false;
}
```

-1

built-in String method
indexOf(String str) does exactly this, but with a String to match.

String text = "Can you hear me? Hello, hello?"
 int index = text.indexOf("he"); // index is 8
 index = text.indexOf("He"); // index is 17
 index = text.indexOf("Help"); // index is -1

For dealing with case, check out String methods:
 equalsIgnoreCase, toLowerCase, toUpperCase

Manipulate String with For-each Loop

```
public static String replaceLetter(String word, char gone, char new1)
{
    char[] cArray = word.toCharArray();
    for (char c: cArray) {
        if (c == gone) {
            c = new1;
        }
    }
    return word;
    return new String(cArray);
}
```


Does this method successfully return a modified word?

Attempt #1: NO

Attempt #2: NO

Let's trace the code with memory model diagram

```
// replaceLetter("a happy", 'a', 'i') -> "i hippy"??
```

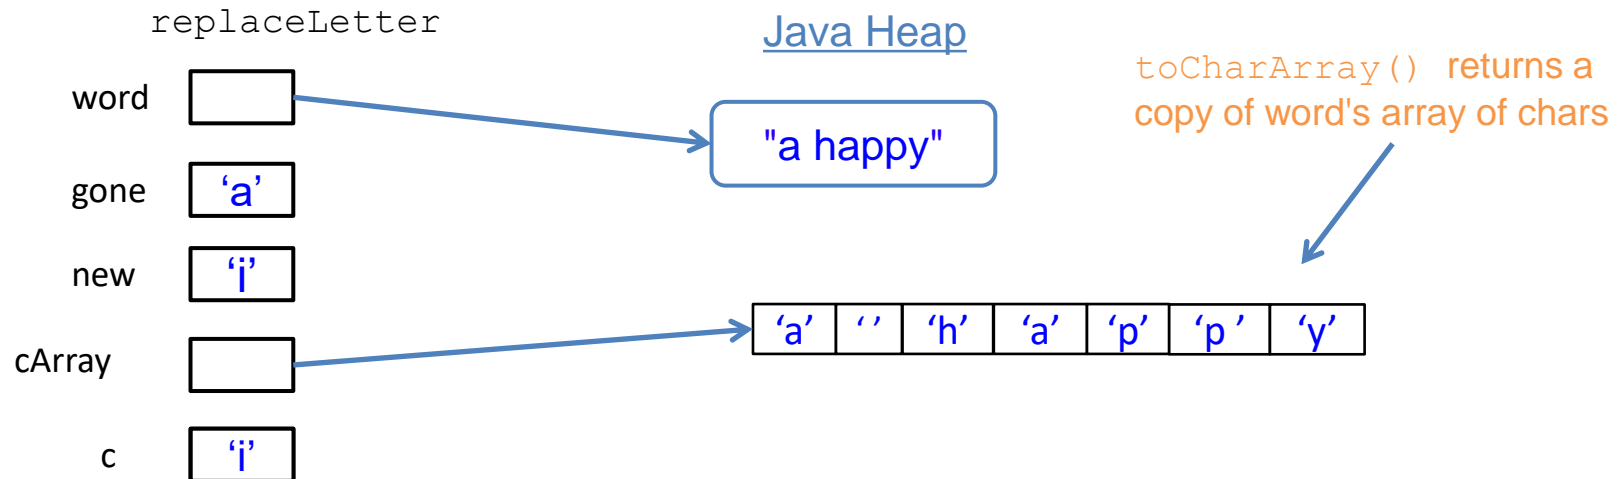

Manipulate String with For-each Loop (Contd.)

```

public static String replaceLetter(String word, char goneIn, char newIn)
{
    char[] cArray = word.toCharArray();
    char[] cArrayMod = new char[cArray.length];
    int i = 0;
    for (char c: cArray) {
        if (c == goneIn)
            cArrayMod[i] = newIn;
        else
            cArrayMod[i] = c;
        i++;
    }
    return new String(cArrayMod);
}

```


Does this method successfully return a modified word?

Attempt #1: NO

Attempt #2: NO

Attempt #3: YES


// replaceLetter("a happy", 'a', 'i') -> "i hippy"??

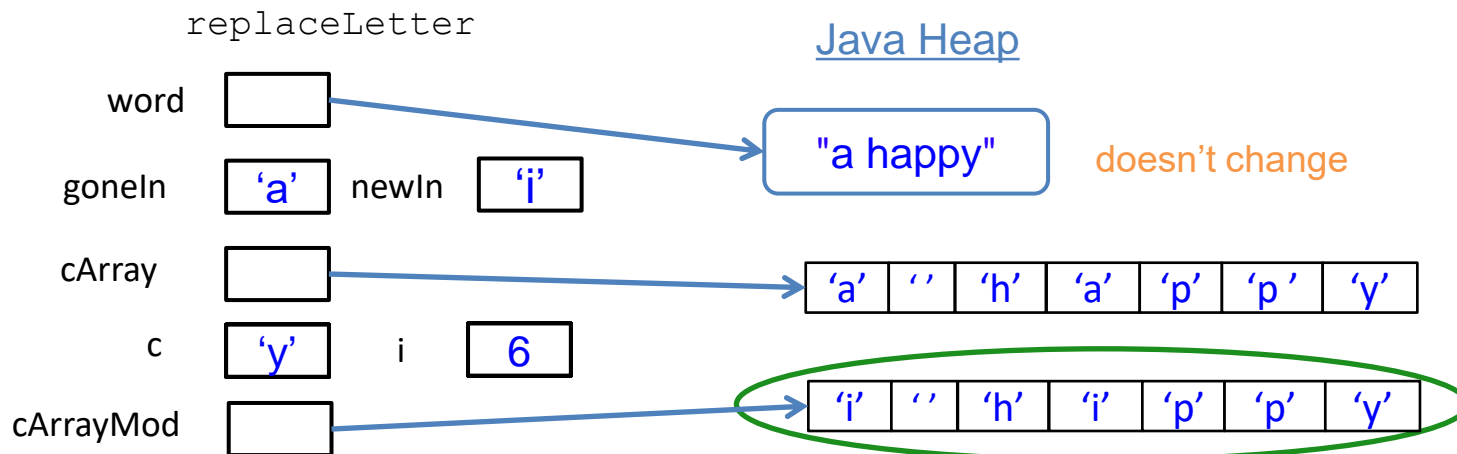

Count the number of words


Use String method `split(String pattern)` to split apart the String.

```
String text = "Can you hear me? Hello, hello?";
String[] words = text.split(" ");
```



what if we add an extra space here

```
String text = "Can you hear me? Hello, hello?";
String[] words = text.split(" ");
```



split

```
public String[] split(String regex)
```


← it doesn't take a string

Splits this string around matches of the given **regular expression.**

Introduction to Regular Expressions (Regex)

Regular expression's basic units are **characters**, and it represents the **pattern** we are trying to match.

```
String text = "Hello hello?";  
String[] words = text.split(" ");
```



"Hello"	" "	"hello?"
---------	-----	----------

This single space is a regular expression. It matches single spaces

3 ways to combine


Repetition

Concatenation

Alternation

Repetition: + means 1 or more

```
String text = "Hello hello?";  
String[] words = text.split(" +");
```



"Hello"	"hello?"
---------	----------

Matches 1 or more spaces in a row

Create More Complicated Regex

```
public class Document {
    private String text; // The text of the whole document
    protected List<String> getTokens(String pattern)
}
```

returns a List of "tokens"

regex defining the "tokens"

Assume you have a Document object, d, whose text is "Hello hello?"

```
d.getTokens(" +");
-> [" "]
```

Matches 1 or more spaces

Repetition

Assume you have a Document object, d, whose text is "Splitting a string, it's as easy as 1 2 33! Right?"

```
d.getTokens("it");
-> ["it", "it"]
```

Two regular expressions side by side. Matches when both appear one after the other

Concatenation

Assume you have a Document object, d, whose text is "Splitting a string, it's as easy as 1 2 33! Right?"

```
d.getTokens("it+");
-> ["itt", "it"]
```

+ means "one or more"

Concatenation
and Repetition

Create More Complicated Regex (Contd.)

```
public class Document {
    private String text; // The text of the whole document
    protected List<String> getTokens(String pattern)
}
```

Assume you have a Document object, d, whose text is "Splitting a string, it's as easy as 1 2 33! Right?"

```
d.getTokens("i(t+)");
-> ["itt", "it"]
```

Use parens to group r.e.'s if you are not sure of grouping

Concatenation and Repetition

Assume you have a Document object, d, whose text is "Splitting a string, it's as easy as 1 2 33! Right?"

```
d.getTokens("it*");
-> ["itt", "i", "i", "it", "i"]
```

* means "zero or more"

Assume you have a Document object, d, whose text is "Splitting a string, it's as easy as 1 2 33! Right?"

```
d.getTokens("it|st");
-> ["it", "st", "it"]
```

| means OR

Alternation

Create More Complicated Regex (Contd.)

```
public class Document {
    private String text; // The text of the whole document
    protected List<String> getTokens(String pattern)
}
```

Assume you have a Document object, d, whose text is "Splitting a string, it's as easy as 1 2 33! Right?"

```
d.getTokens("[123]");
-> ["1", "2", "3", "3"]
```

[] mean match "anything in the set"

Character
classes

```
d.getTokens("[1-3]");
-> ["1", "2", "3", "3"]
```

- indicates a range
(any character between 1 and 3)

Assume you have a Document object, d, whose text is "Splitting a string, it's as easy as 1 2 33! Right?"

```
d.getTokens("[a-f]");
-> ["a", "a", "e", "a", "a"]
```

- indicates a range
(any character between a and f)

Assume you have a Document object, d, whose text is "Splitting a string, it's as easy as 1 2 33! Right?"

```
d.getTokens("[^a-z123 ]");
-> ["S", ",", "'", "!", "R", "?"]
```

^ indicates NOT any
characters in this set

Negation

Excluding a character

Assume you have a Document object, d, whose text is "Splitting a string, it's as easy as 1 2 33! Right?"

Which of the following regular expressions can you insert in the blank so that it will give the output shown? Select all that apply.

A. "[1233]"  -> ["1", "2", "3", "3"]

B. "[1,2,33]"  -> [",", "1", "2", "3", "3"]

C. "[0-9]+" -> ["1", "2", "33"]

D. "[1-3]*"  -> 

E. "1|2|33"  -> ["1", "2", "33"]

Option C is FAR more versatile. It captures ANY non-negative integer (not just 1, 2, and 33).

Use Regex to Calculate Flesch Score

```
public class Document {
    private String text; // The text of the whole document
    protected List<String> getTokens(String pattern)
    public abstract int getNumWords();
    public abstract int getNumSentences();
}
```

given helper method

```
public class BasicDocument extends Document {
    @Override
    public int getNumWords() {
        List<String> tokens = getTokens("_____");
        return tokens.size();
    }
    @Override
    public int getNumSentences()
    {
        List<String> tokens = getTokens("_____");
        return tokens.size();
    }
}
```

Need a regex that matches "any word"

What constitutes a word?

"Any contiguous sequence of alphabetic characters"

What constitutes a sentence?

"A contiguous sequence of characters that does NOT include end of sentence punctuation."

"A sequence of any characters ending with end of sentence punctuation (. ! ?)"