

CSC 112: Computer Operating Systems

Lecture 5

Scheduling Exercises

Department of Computer Science,
Hofstra University

Predicting Burst Time

- Use exponential averaging $\tau_n = \alpha t_{n-1} + (1-\alpha)\tau_{n-1}$ to predict the next burst time. Assume initial estimate $\tau_0 = 10$, and the actual burst times of the first four processes t_0, t_1, t_2, t_3 are 4, 8, 6 and 7, respectively. Given $\alpha = 0.5$. Compute the predicted burst times $\tau_1, \tau_2, \tau_3, \tau_4$.

Scheduling

- Here is a table of processes and their arrival and execution times.
- 1) Draw the Gantt chart under 4 policies: First Come First Serve (FCFS), Shortest Job First (SJF), Shortest-Remaining-Time-First (SRTF), Round-Robin (RR) with time quantum = 1. Assume that context switch overhead is 0. For RR, assume that an arriving process is scheduled to run at the beginning of its arrival time, i.e., it is added to the head of the queue upon arrival.
- 2) Compute the finish times and response times for all processes, and the average response time. (If the division is hard, write a fraction like $\frac{28}{5}$ instead of 5.6)

Scheduling I


PID	Arriv. time	Exec Time	FCFS Finish Time	FCFS Response Time	SJF Finish Time	SJF Response Time	SRTF Finish Time	SRTF Response Time	RR Finish Time	RR Response Time
1	0	2								
2	1	6								
3	4	2								
				Avg RT		Avg RT		Avg RT		Avg RT

FCFS											
SJF											
SRTF											
RR											
Time	0	1	2	3	4	5	6	7	8	9	10

Gantt Chart

Scheduling II

PID	Arriv. time	Exec Time	FCFS Finish Time	FCFS Response Time	SJF Finish Time	SJF Response Time	SRTF Finish Time	SRTF Response Time	RR Finish Time	RR Response Time
1	0	3								
2	1	5								
3	3	2								
4	9	2								
				Avg RT		Avg RT		Avg RT		Avg RT

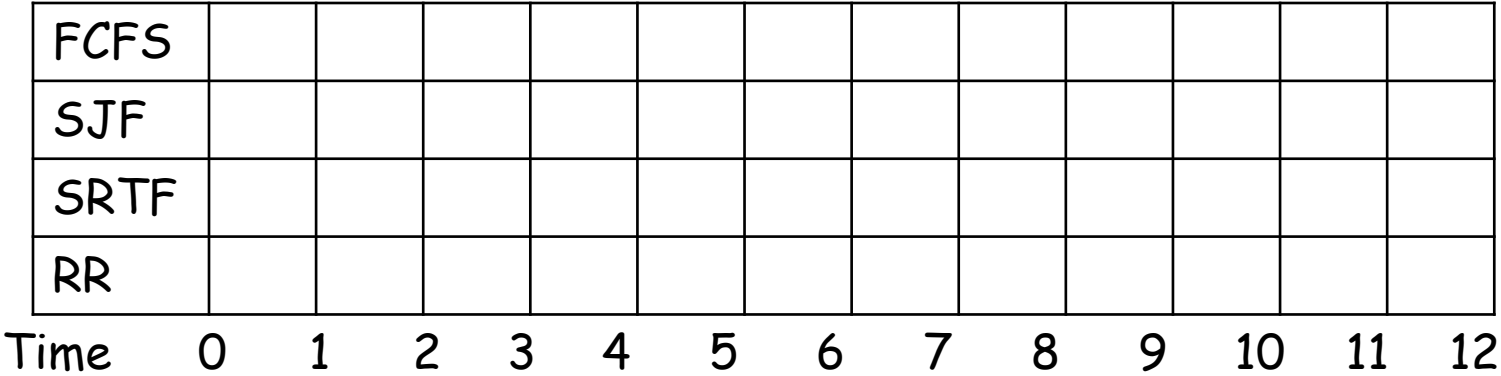

Gantt Chart

Scheduling III

- Consider the set of 3 processes whose arrival time and CPU burst times are given below. If the CPU scheduling policy is **FCFS**, draw the Gantt chart and calculate the average response time.

PID	Arriv. time	Exec Time	FCFS Finish Time	FCFS Response Time
1	0	2		
2	3	1		
3	5	6		
				Avg RT

Scheduling with Bursts I

- Consider the set of 3 processes whose arrival time and CPU/IO burst times are given below. If the CPU scheduling policy is **Shortest Remaining Time First (SRTF)**, draw the Gantt chart and calculate the average response time. (Note: consider the overlap of computation and IO bursts of different processes)

PID	Arriv. time	IO Burst	CPU Burst	IO Burst
1	0	2	7	1
2	0	4	14	2
3	0	6	21	3
				Avg RT

Scheduling with Bursts II

- Consider the set of 3 processes whose arrival time and CPU/IO burst times are given below. If the CPU scheduling policy is **Fixed-Priority Scheduling** (larger number denotes higher priority), draw the Gantt chart and calculate the average response time.

PID	Arriv. time	Priority	CPU Burst	IO Burst	CPU Burst
1	0	2	1	5	3
2	2	1	3	3	1
3	3	3	2	3	1
			Avg RT		Avg RT