


b5 — routing vector separation between categories
(higher = more distinct routing, computed in 8-D PCA space)

Mahalanobis distance (pooled cov)



Cohen-style d $|\mu_i - \mu_j| / (\sigma_i + \sigma_j)$

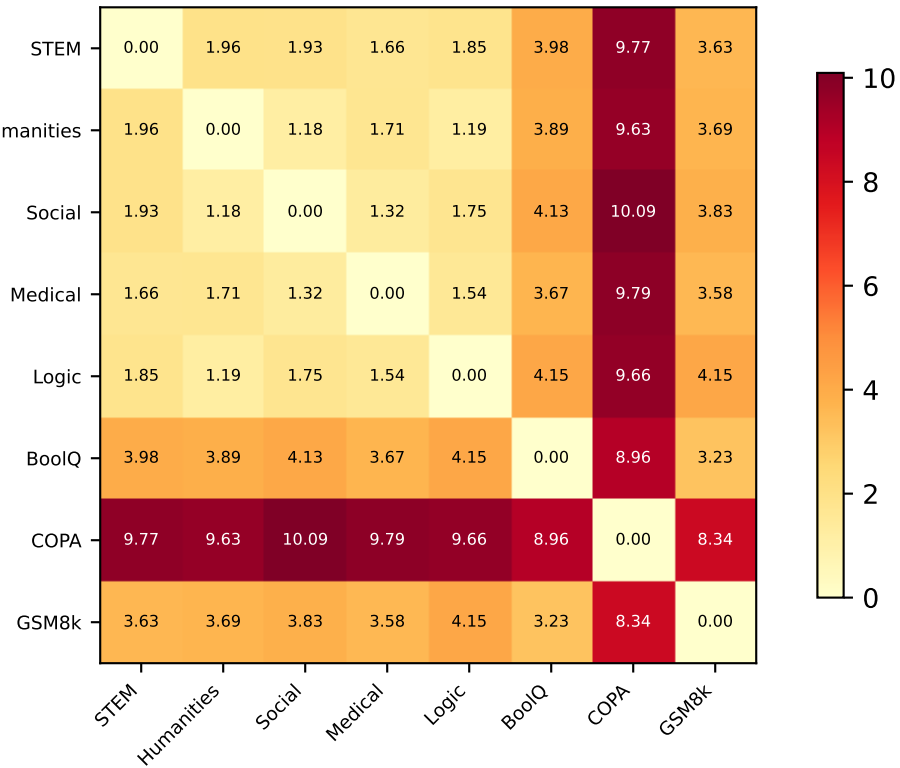