Nome: Guilherme de Morais China Costa
Data: 10/04/2026
Título: Pipelines de CI/CD e DevOps - AT

Link implementação:
https://github.com/guilhermec-costa/ufology_k8s

Evidência rota pública exposta

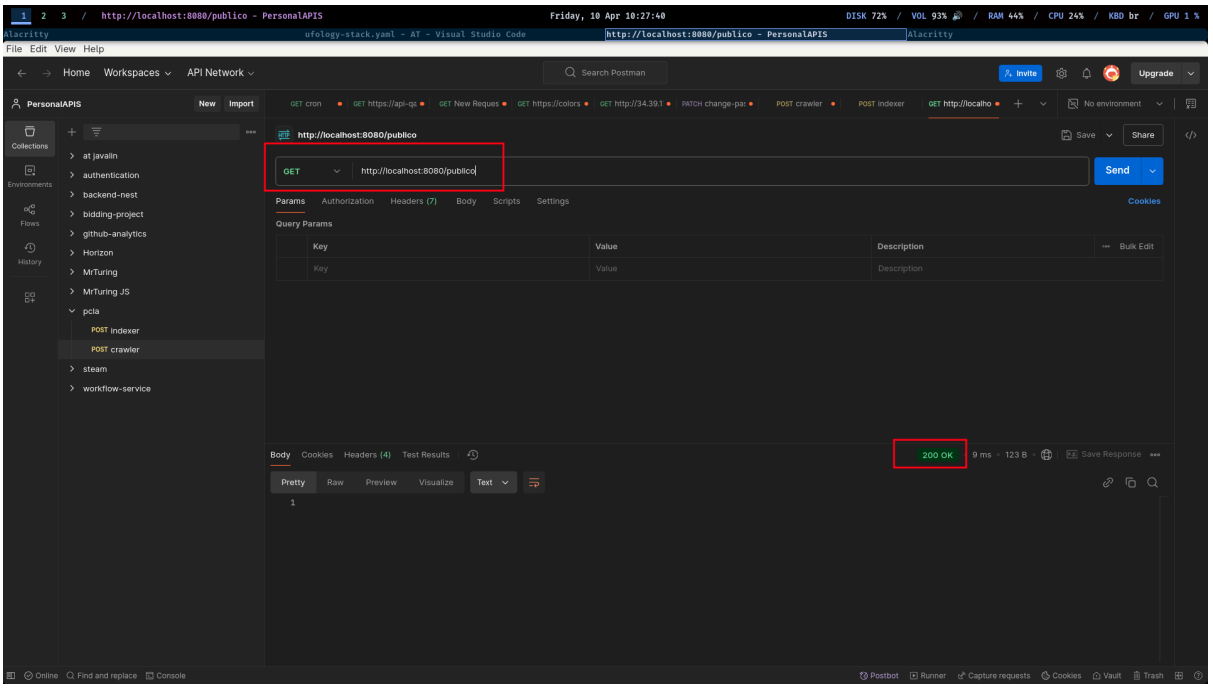

Evidências workflows

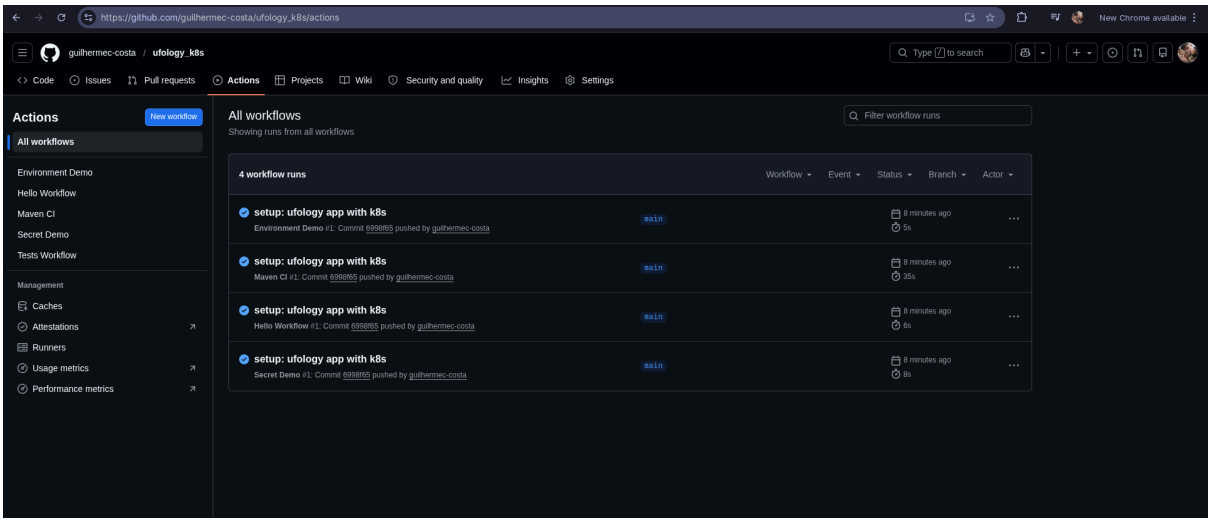

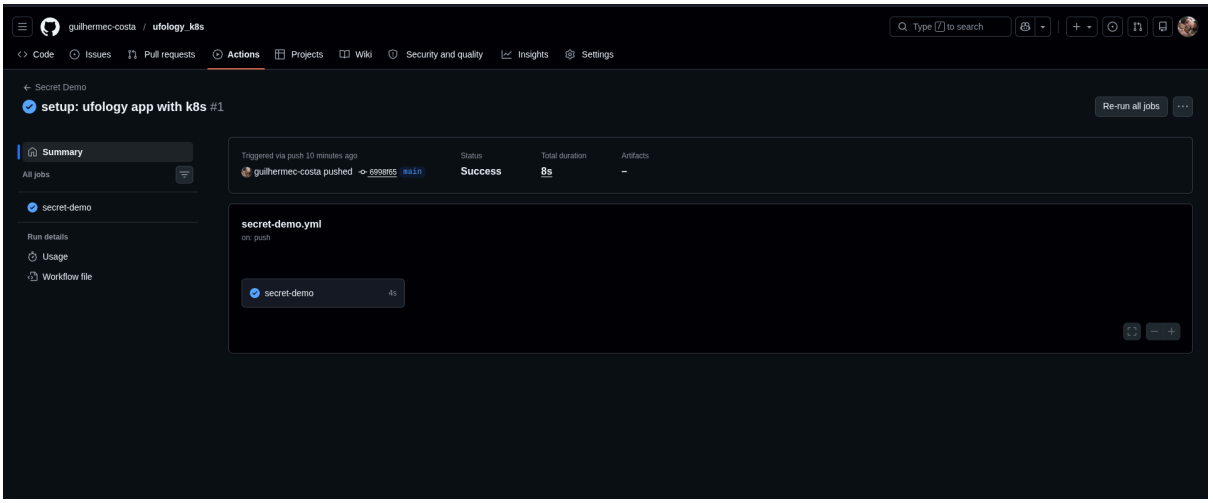
guilhermec-costa / ufology_k8s
Type / to search
Code
Issues
Pull requests
Actions
Projects
Wiki
Security and quality
Insights
Settings
Secret Demo
setup: ufology app with k8s #1
Re-run all jobs
Summary
All jobs
secret-demo
Run details
Usage
Workflow file
Triggered via push 10 minutes ago
guilhermec-costa pushed 6998f65 main
Status
Success
Total duration
8s
Artifacts
–
secret-demo.yml
on: push
secret-demo
4s

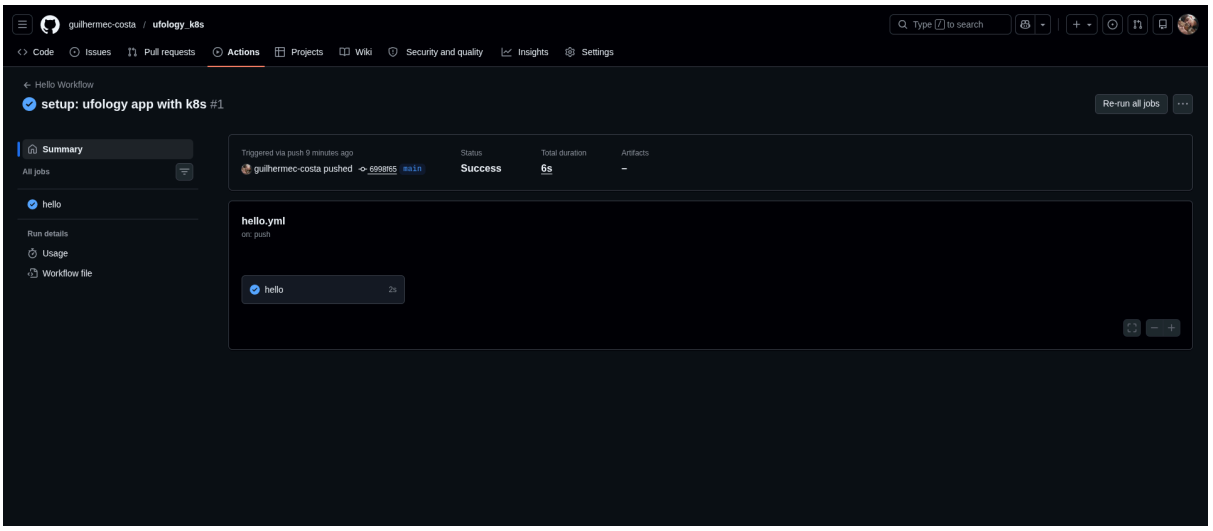
guilhermec-costa / ufology_k8s
Type / to search
Code
Issues
Pull requests
Actions
Projects
Wiki
Security and quality
Insights
Settings
Hello Workflow
setup: ufology app with k8s #1
Re-run all jobs
Summary
All jobs
hello
Run details
Usage
Workflow file
Triggered via push 9 minutes ago
guilhermec-costa pushed 6998f65 main
Status
Success
Total duration
6s
Artifacts
–
hello.yml
on: push
hello
2s

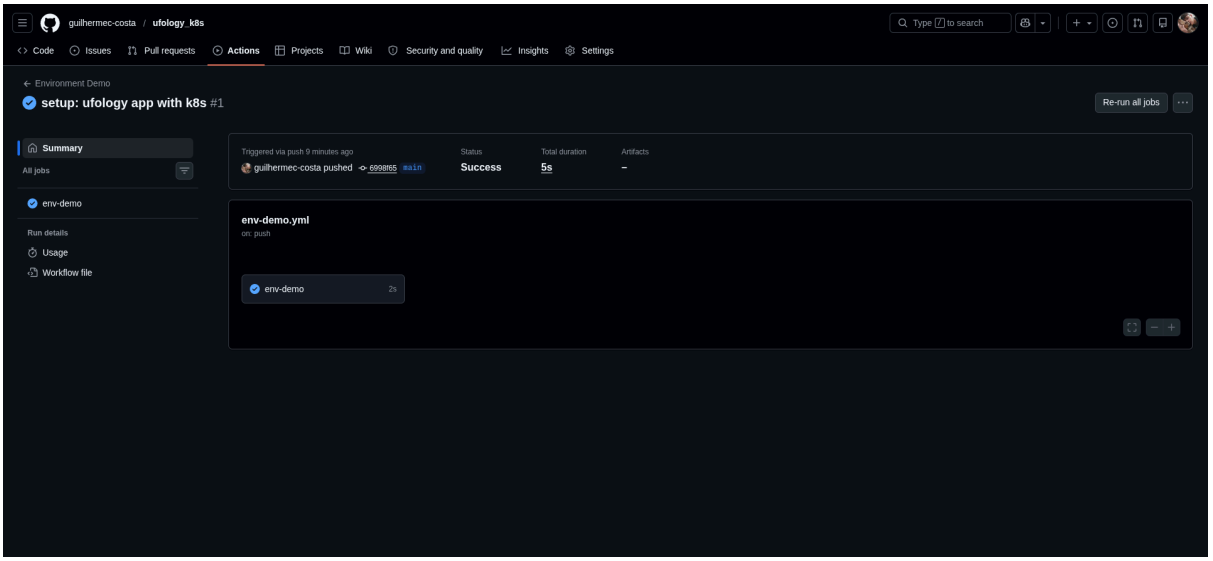
guilhermec-costa / ufology_k8s
Type / to search
Code
Issues
Pull requests
Actions
Projects
Wiki
Security and quality
Insights
Settings
Environment Demo
setup: ufology app with k8s #1
Re-run all jobs
Summary
All jobs
env-demo
Run details
Usage
Workflow file
Triggered via push 9 minutes ago
guilhermec-costa pushed 6998f65 main
Status
Success
Total duration
5s
Artifacts
–
env-demo.yml
on: push
env-demo
2s

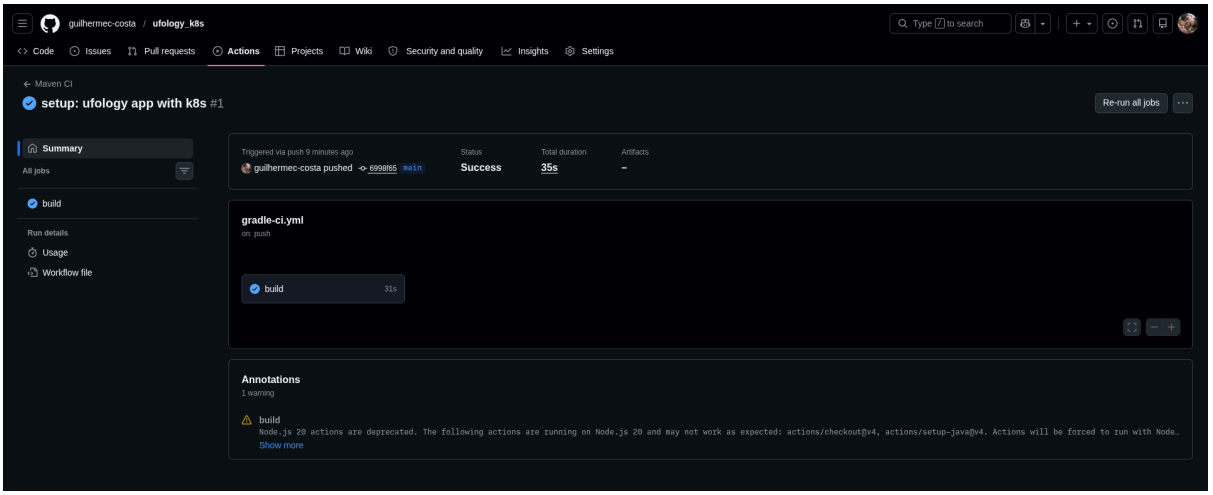

Link público da imagem:

https://hub.docker.com/r/guilhermechina/ufotracker

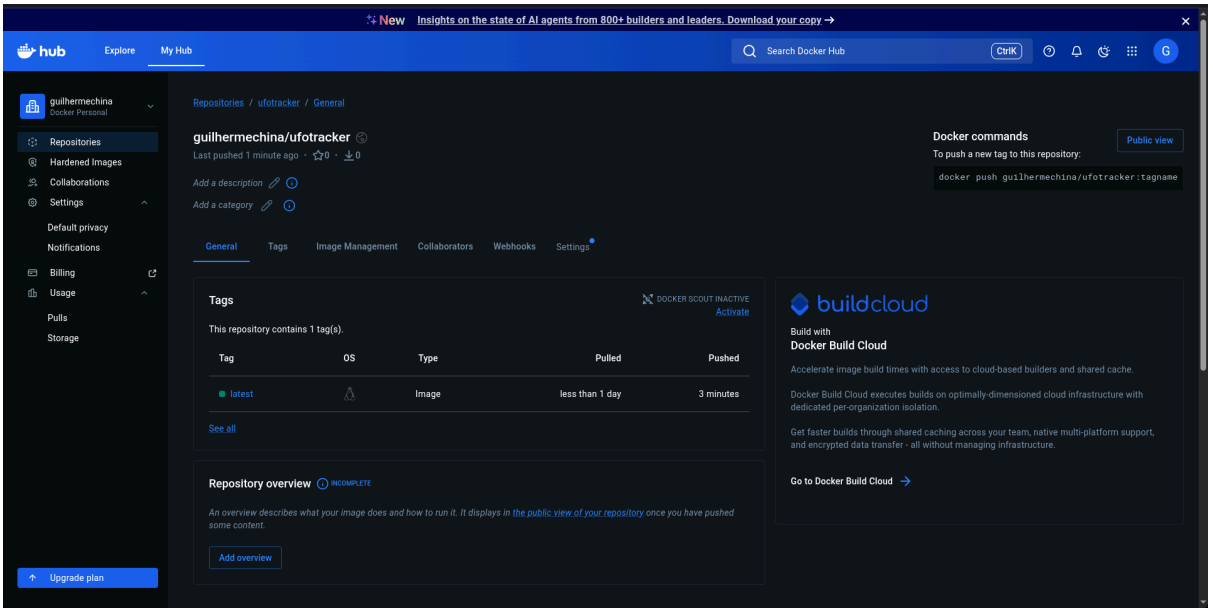

Evidências kubectl

```
guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❯ kubectl get namespace ufology
NAME      STATUS   AGE
ufology   Active   27m

guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❯
```

PROBLEMS 9 OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❯ kubectl get secret db-secret -n ufology
NAME        TYPE     DATA   AGE
db-secret   Opaque   1      26m

guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❯
```

PROBLEMS 9 OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❮ kubectl get configmap app-config -n ufology
NAME         DATA   AGE
app-config   1      26m

guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❯
```

```
PROBLEMS 9   OUTPUT   DEBUG CONSOLE   TERMINAL   PORTS

guichina@Guichina ../app  main [ v0.0.1-SNAPSHOT][ v21.0.10]
❯

guichina@Guichina ../app  main [ v0.0.1-SNAPSHOT][ v21.0.10]
❯

guichina@Guichina ../app  main [ v0.0.1-SNAPSHOT][ v21.0.10]
❯

guichina@Guichina ../app  main [ v0.0.1-SNAPSHOT][ v21.0.10]
❯ kubectl get all -n ufology
NAME                                READY   STATUS    RESTARTS   AGE
pod/ufodb-59f4666f45-ds4n7          1/1     Running   0          24m
pod/uforedis-7949fc5779-nkf4t       1/1     Running   0          24m
pod/ufotracker-579bc4488c-dxjjd     1/1     Running   0          24m
pod/ufotracker-579bc4488c-rslmk     1/1     Running   0          24m

NAME                 TYPE        CLUSTER-IP      EXTERNAL-IP   PORT(S)    AGE
service/ufodb        ClusterIP   10.105.58.163   <none>        5432/TCP   24m
service/uforedis     ClusterIP   10.100.97.163   <none>        6379/TCP   24m
service/ufotracker   ClusterIP   10.96.102.231   <none>        8080/TCP   24m

NAME                            READY   UP-TO-DATE   AVAILABLE   AGE
deployment.apps/ufodb           1/1     1            1           24m
deployment.apps/uforedis        1/1     1            1           24m
deployment.apps/ufotracker      2/2     2            2           24m

NAME                                       DESIRED   CURRENT   READY   AGE
replicaset.apps/ufodb-59f4666f45           1         1         1       24m
replicaset.apps/uforedis-7949fc5779        1         1         1       24m
replicaset.apps/ufotracker-579bc4488c      2         2         2       24m

guichina@Guichina ../app  main [ v0.0.1-SNAPSHOT][ v21.0.10]
❯
main   0 9   Java: Ready   -- NORMAL --   Ln 84, Col 18   Spaces: 2   UTF-8   LF   { } YAML
kubectl app
zsh app
```

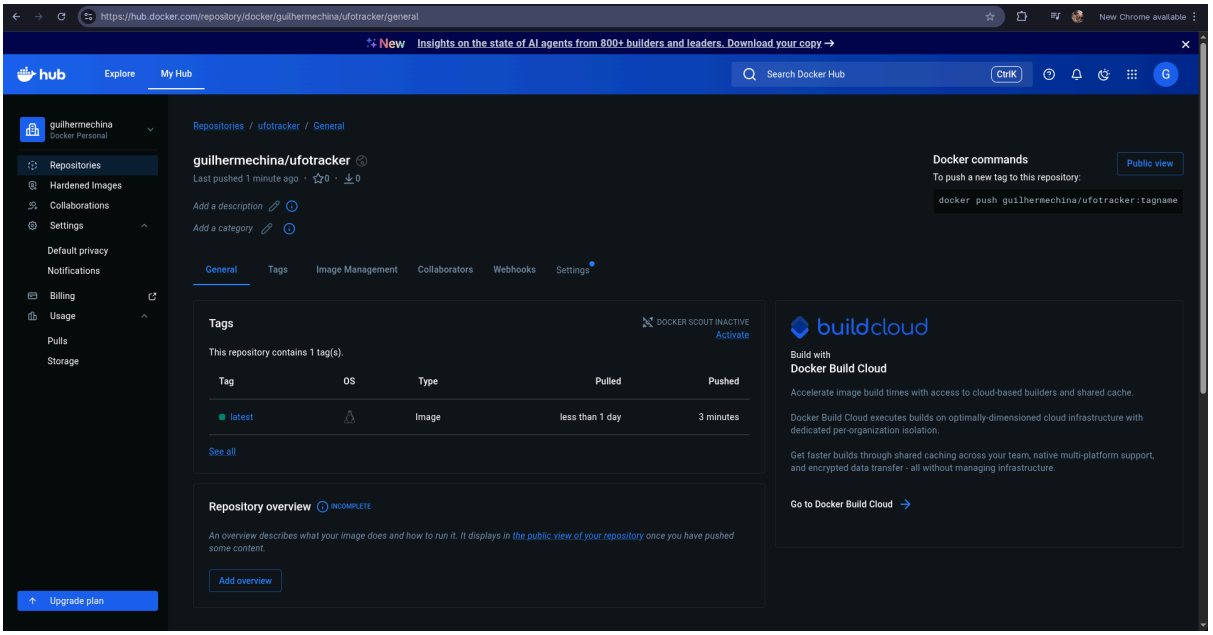

Diferença entre self hosted runners e runners

Runners hospedados pelo GitHub são máquinas gerenciadas pelo próprio GitHub. A principal vantagem é a praticidade: não exigem manutenção, escalam rápido e funcionam bem para CI padrão. A desvantagem é o menor controle do ambiente e limites de customização.

Runners auto-hospedados são máquinas mantidas pelo próprio time. A principal vantagem é o controle total sobre sistema, rede, ferramentas instaladas e acesso a ambientes internos. A desvantagem é o custo operacional: configuração, atualização, segurança e disponibilidade passam a ser responsabilidade da equipe.