Nome: Guilherme de Morais China Costa
Data: 10/04/2026
Título: Pipelines de CI/CD e DevOps - AT

Link implementação:
https://github.com/guilhermec-costa/ufology_k8s

Evidência rota pública exposta com:
kubectl port-forward -n ufology service/ufotracker 8080:8080

```
guichina@Guichina ../app  [] main [!1 ?9 ] [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❯ kubectl port-forward -n ufology service/ufotracker 8080:8080

Forwarding from 127.0.0.1:8080 -> 8080
Forwarding from [::1]:8080 -> 8080
Handling connection for 8080
Handling connection for 8080
Handling connection for 8080
Handling connection for 8080
Handling connection for 8080
Handling connection for 8080
Handling connection for 8080
Handling connection for 8080
Handling connection for 8080
```

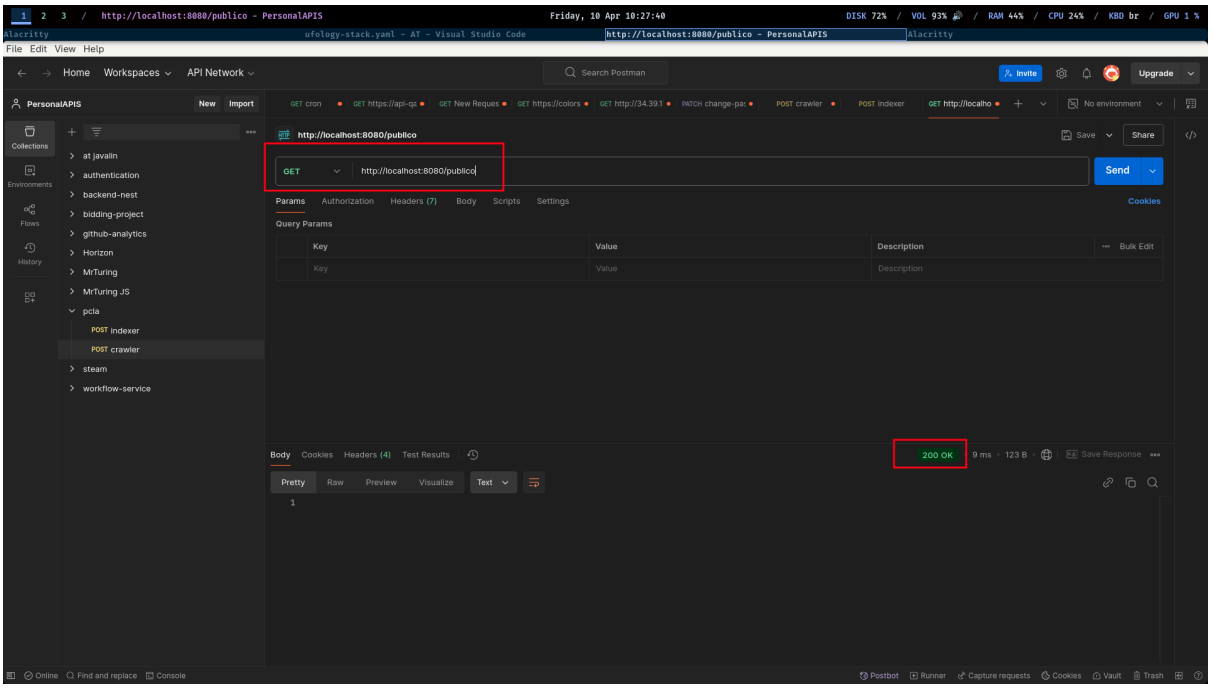

Evidências workflows

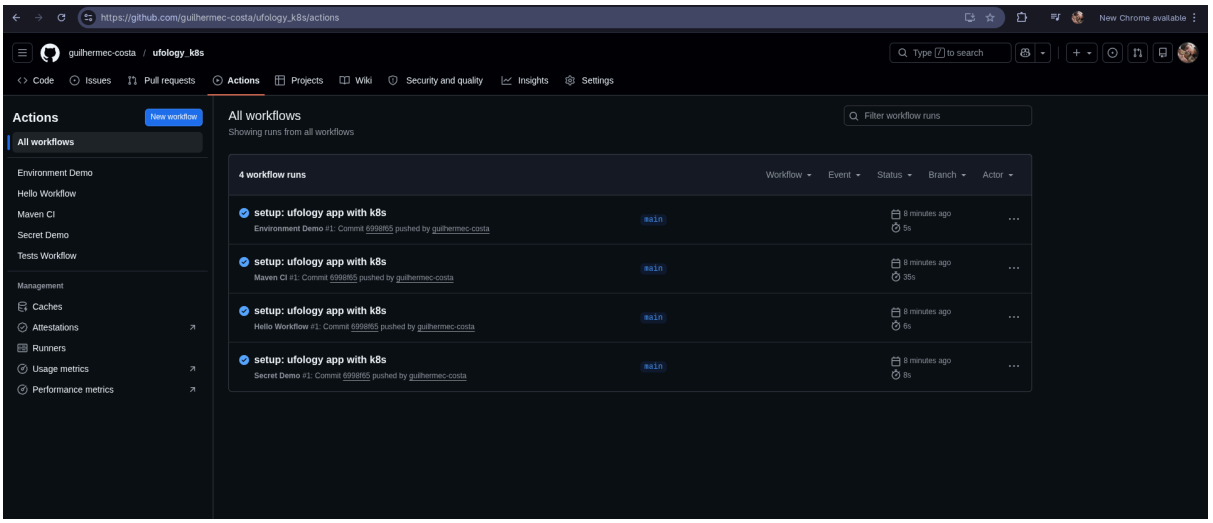

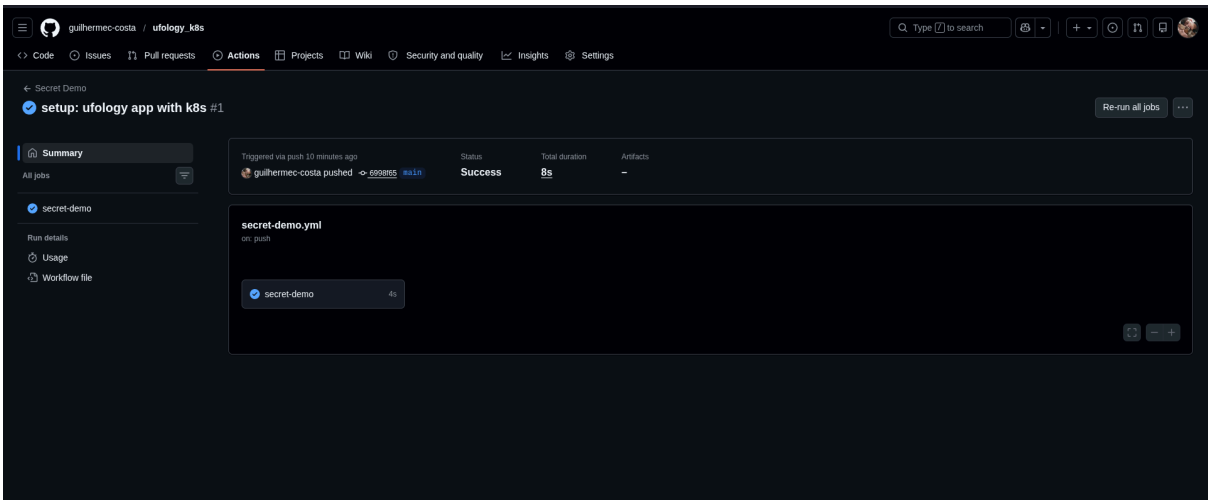

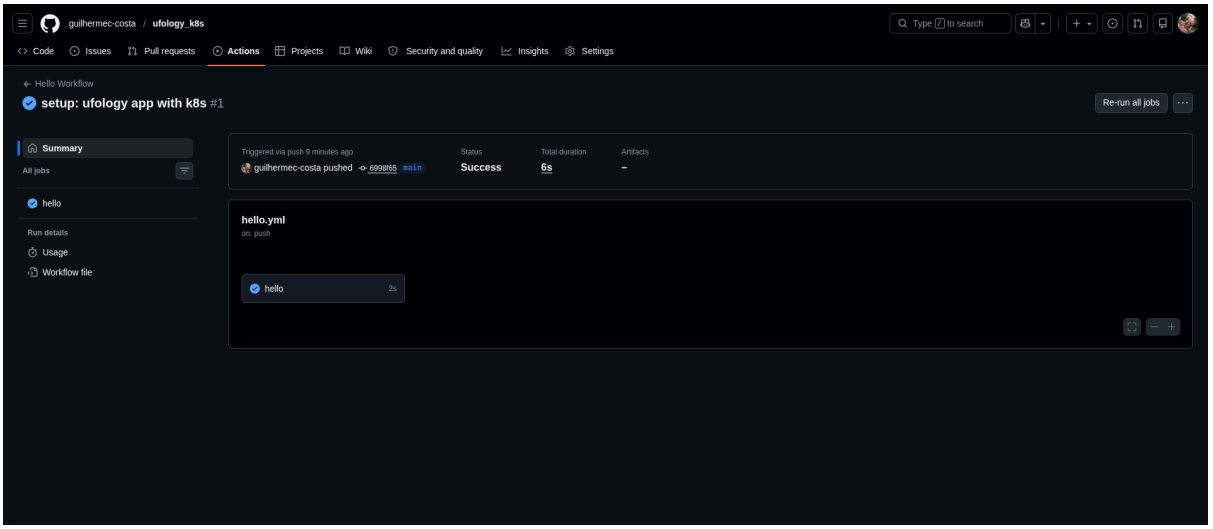
guilhermec-costa / ufology_k8s
Type / to search
Code
Issues
Pull requests
Actions
Projects
Wiki
Security and quality
Insights
Settings
Hello Workflow
setup: ufology app with k8s #1
Re-run all jobs
Summary
All jobs
hello
Run details
Usage
Workflow file
Triggered via push 9 minutes ago
guilhermec-costa pushed 6998f65 main
Status
Success
Total duration
6s
Artifacts
–
hello.yml
on: push
hello
2s

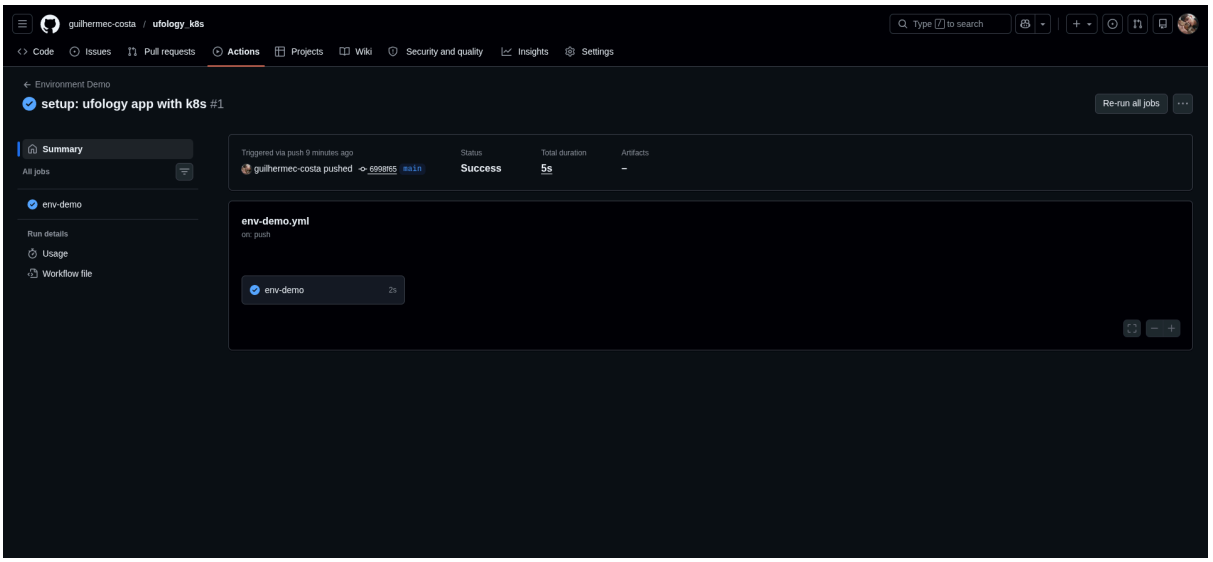
guilhermec-costa / ufology_k8s
Type / to search
Code
Issues
Pull requests
Actions
Projects
Wiki
Security and quality
Insights
Settings
Environment Demo
setup: ufology app with k8s #1
Re-run all jobs
Summary
All jobs
env-demo
Run details
Usage
Workflow file
Triggered via push 9 minutes ago
guilhermec-costa pushed 6998f65 main
Status
Success
Total duration
5s
Artifacts
–
env-demo.yml
on: push
env-demo
2s

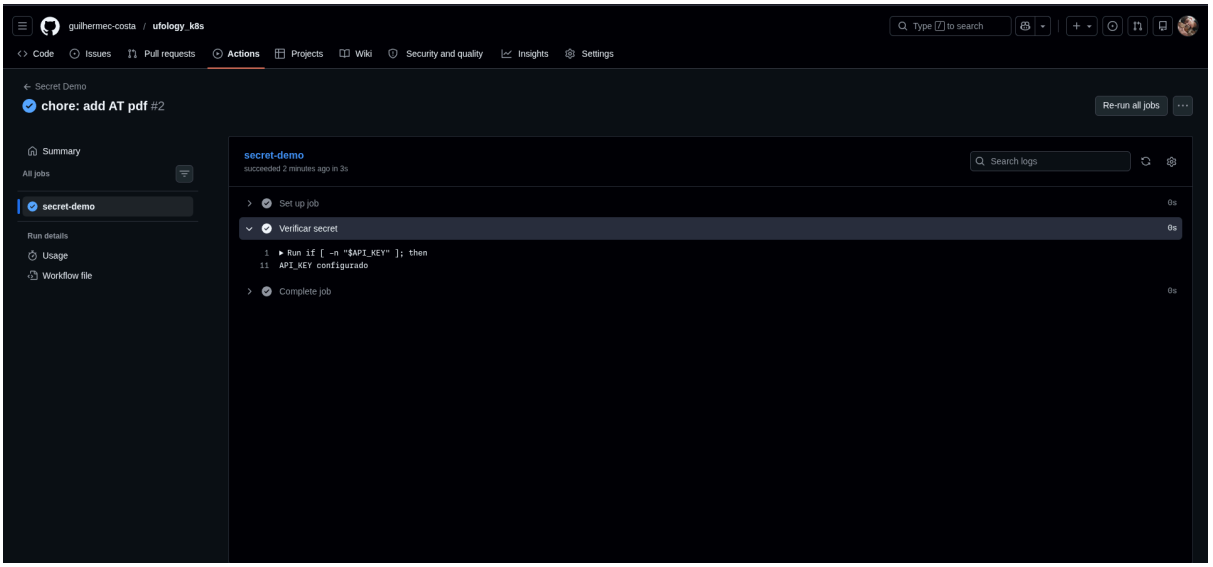
guilhermec-costa / ufology_k8s
Type / to search
Code
Issues
Pull requests
Actions
Projects
Wiki
Security and quality
Insights
Settings
Secret Demo
chore: add AT pdf #2
Re-run all jobs
Summary
All jobs
secret-demo
Run details
Usage
Workflow file
secret-demo
succeeded 2 minutes ago in 3s
Search logs
Set up job
0s
Verificar secret
0s
1 ▶ Run if [-n "$API_KEY"]; then
11 API_KEY configurado
Complete job
0s

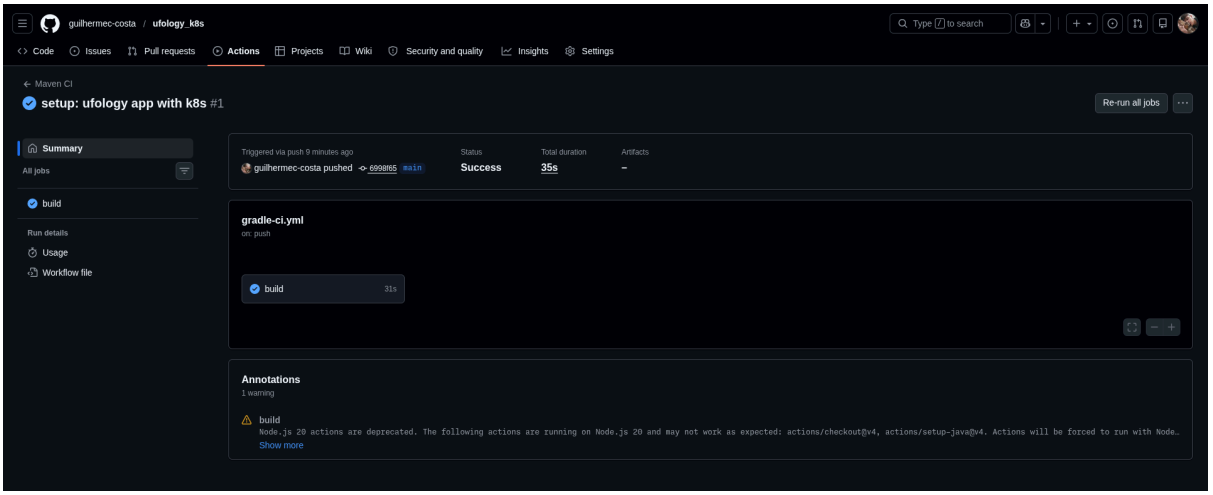

Link público da imagem:

https://hub.docker.com/r/guilhermechina/ufotracker

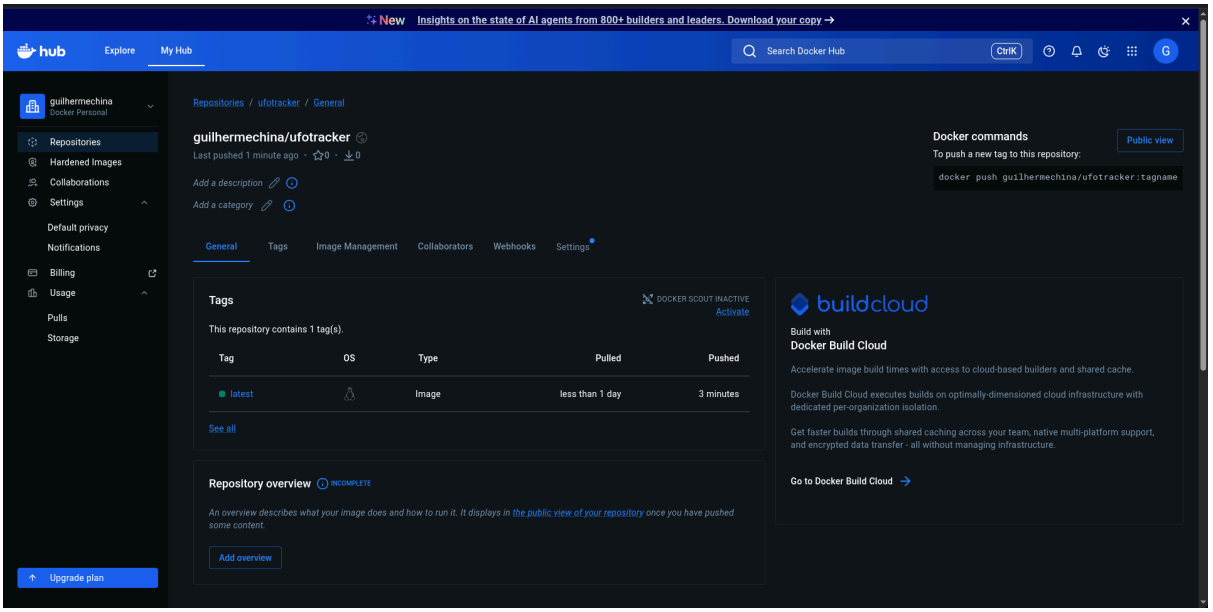

Evidências kubectl

```
guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❯ kubectl get namespace ufology
NAME      STATUS   AGE
ufology   Active   27m

guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❯
```

PROBLEMS 9 OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❯ kubectl get secret db-secret -n ufology
NAME        TYPE     DATA   AGE
db-secret   Opaque   1      26m

guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❯
```

PROBLEMS 9 OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❮ kubectl get configmap app-config -n ufology
NAME         DATA   AGE
app-config   1      26m

guichina@Guichina ../app  main [📦 v0.0.1-SNAPSHOT][☕ v21.0.10]
❯
```

```
PROBLEMS 9   OUTPUT   DEBUG CONSOLE   TERMINAL   PORTS

guichina@Guichina ../app  main [ v0.0.1-SNAPSHOT][ v21.0.10]
❯

guichina@Guichina ../app  main [ v0.0.1-SNAPSHOT][ v21.0.10]
❯

guichina@Guichina ../app  main [ v0.0.1-SNAPSHOT][ v21.0.10]
❯

guichina@Guichina ../app  main [ v0.0.1-SNAPSHOT][ v21.0.10]
❯ kubectl get all -n ufology
NAME                                READY   STATUS    RESTARTS   AGE
pod/ufodb-59f4666f45-ds4n7          1/1     Running   0          24m
pod/uforedis-7949fc5779-nkf4t       1/1     Running   0          24m
pod/ufotracker-579bc4488c-dxjjd     1/1     Running   0          24m
pod/ufotracker-579bc4488c-rslmk     1/1     Running   0          24m

NAME                 TYPE        CLUSTER-IP      EXTERNAL-IP   PORT(S)    AGE
service/ufodb        ClusterIP   10.105.58.163   <none>        5432/TCP   24m
service/uforedis     ClusterIP   10.100.97.163   <none>        6379/TCP   24m
service/ufotracker   ClusterIP   10.96.102.231   <none>        8080/TCP   24m

NAME                            READY   UP-TO-DATE   AVAILABLE   AGE
deployment.apps/ufodb           1/1     1            1           24m
deployment.apps/uforedis        1/1     1            1           24m
deployment.apps/ufotracker      2/2     2            2           24m

NAME                                       DESIRED   CURRENT   READY   AGE
replicaset.apps/ufodb-59f4666f45           1         1         1       24m
replicaset.apps/uforedis-7949fc5779        1         1         1       24m
replicaset.apps/ufotracker-579bc4488c      2         2         2       24m

guichina@Guichina ../app  main [ v0.0.1-SNAPSHOT][ v21.0.10]
❯
main   0 9   Java: Ready   -- NORMAL --   Ln 84, Col 18   Spaces: 2   UTF-8   LF   { } YAML
kubectl app
zsh app
```

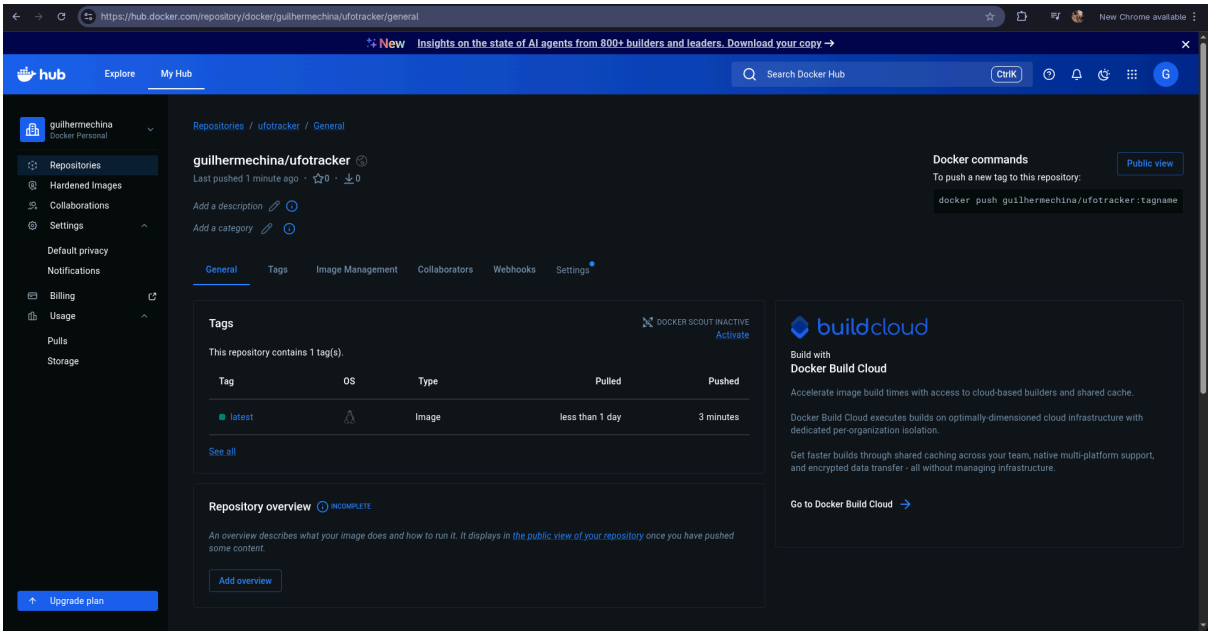

Diferença entre self hosted runners e runners

Runners hospedados pelo GitHub são máquinas gerenciadas pelo próprio GitHub. A principal vantagem é a praticidade: não exigem manutenção, escalam rápido e funcionam bem para CI padrão. A desvantagem é o menor controle do ambiente e limites de customização.

Runners auto-hospedados são máquinas mantidas pelo próprio time. A principal vantagem é o controle total sobre sistema, rede, ferramentas instaladas e acesso a ambientes internos. A desvantagem é o custo operacional: configuração, atualização, segurança e disponibilidade passam a ser responsabilidade da equipe.