



FAM User Guide

4 June 2026

Contents

Onboarding a new data source - Cloud - Amazon Web Services S3 3

Onboarding a new data source - Cloud - Amazon Web Services S3

Follow the procedures below to onboard a Amazon Web Services (AWS) S3 bucket data source.

Note that if you plan on auditing your AWS S3 data sources, you must first onboard the S3 data source that is designated as the log destination, and only afterward onboard those S3 data sources that are associated with it.

Prerequisites

Note the prerequisites before you begin onboarding an AWS S3 bucket data source.

Registration

- **Cloud account:** You can either use an existing FAM-compatible AWS Cloud account or you can add a new one as part of this procedure, using the DSF Hub USC.

Adding a new account: If you are adding an AWS S3 data source from a new AWS cloud account, you must first configure the AWS cloud account to work with FAM. For more information, see the [Configuring AWS S3 to work with File Activity Monitoring](#) topic in the **FAM Administration Guide**.

Using an existing account: A FAM-compatible AWS Cloud account is one that has the following characteristics:

- Its **Auth Mechanism** is set to **Key**
- Its Secret Manager is toggled off

For more information, see [AWS cloud asset specifications](#).

- You can onboard multiple AWS S3 data sources per AWS cloud account.

Classification

- Ensure that you have downloaded and installed the DDC agent(s) you want to use to scan this AWS S3 data source onto a proxy server, and that you know its hostname. On CM, the agent cannot be configured as **Local storage only**. For more information, see the [Architecture](#) and [DDC Agents](#) topics from the **CipherTrust Manager Documentation**.

Auditing

In order for FAM to pull audit logs from an AWS S3 bucket data source, you must designate one of your S3 buckets as the **log destination** as follows:

1. In AWS, to designate an S3 bucket as a log destination, you configure it as the storage location of a CloudTrail trail and you associate your other S3 buckets with it. For more information, see the [Configuring](#)

AWS S3 to work with File Activity Monitoring topic in the **FAM Administration Guide**.

2. You onboard the log aggregator S3 bucket first (if you have not already done so) using the procedure in this topic, and then you onboard the other S3 buckets that are associated with it.

Note that an S3 bucket configured as a storage location of a CloudTrail trail can also save logs from itself and thus also act as an AWS S3 bucket data source, as well as from other AWS S3 bucket data sources, if you so desire.

FAM cannot pull logs from an AWS S3 bucket data source unless that S3 bucket's logs are pulled to a log destination.

Additionally, verify the name of the gateway which pulls the audit results.

Registering an AWS S3 data source to FAM

For a data source to be scanned and/or audited by FAM, you must first register it to FAM. This stage is mandatory, while the other stages are optional and can be carried out later, if you want.

To register an AWS S3 data source to FAM:

1. Access the DSF Hub Data sources inventory. For more information, see [Working with Data Sources Inventory Window](#).
2. Click the **Onboard new** button . The **Onboard a new data source** dialog box opens displaying the **Registration** section.

Onboard a new data source

1. Registration

2. Classification

3. Auditing

4. Summary

Registration


Type *

Select... ▼

Cancel

Next

3. From the **Type** drop-down list, select **AWS S3**. (You will have to scroll all the way down to find it.)

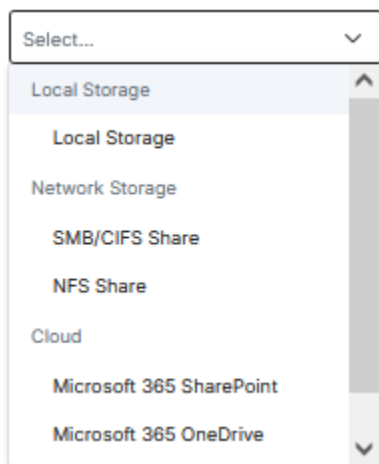

The dialog box appears as in the image below.

Onboard a new data source

1. Registration

2. Classification

3. Auditing

4. Summary

Registration

Type *

AWS S3

General

Display name *

My S3 Bucket

Bucket ARN *

arn:aws:s3:::your-bucket1

Bucket name *

your-bucket1

Criticality

2

Used for

Production

Cloud account

Cloud account *

Basic AWS Account

Add new account

Manage accounts

Owners' emails addresses

Admin *

a@b.com

Owned by

a@b.com

Geo location

Country *

United Kingdom

City *

London

Cancel

Next

- Fill in the fields in accordance with the table below.
- Click **Next** to proceed to the next stage, **Configuring Data discovery and classification**. See below.

Name	Description
Type	You have selected your preferred Type of data source.

Name	Description
General - Display name	This is the display name the data source will have in the Data source inventory and in the Apply to tab of an audit policy. Enter a meaningful name so you know what it represents.
General - Bucket ARN	The unique identifier of the bucket within AWS
General - Bucket name	Auto-populated with the bucket name from the Bucket ARN
General - Criticality	The criticality level of the data in the data source. Values are 1-4, where 1 means "most critical" and 4 means "not critical at all".
General - Used for	Select from the drop-down list the function of this data source: ▪ Production ▪ Test ▪ Development ▪ Demonstration ▪ QA ▪ Staging ▪ Training
Cloud account	Add a new cloud account or select one from the drop-down list. The drop-down list shows all DSF Hub-recognized AWS Cloud accounts that are FAM-compatible. The links below this field are: ▪ Add new account: Opens the Add Cloud Account dialog box of the DSF Hub USC that enables you to add a new AWS cloud account. When you add a new account, you will need the access key ID and secret key ID that were prepared in Step 1 of the Prerequisites section of the Configuring AWS S3 to work with File Activity Monitoring topic in the FAM Administration Guide. You also need to specify a region. ▪ Manage accounts: Opens the Cloud accounts window of the DSF Hub USC from where you can view the accounts that have already been added to the DSF Hub USC.
Owner's emails -	Enter the email address of the administrator responsible for managing the

Name	Description
Admin	data source. This is used for access and configuration purposes.
Owner's emails - Owner	Enter the email address of the person or team who owns or is responsible for managing the data source. This helps identify the primary contact for any related inquiries or issues.
Geo Location - Country	Select the country in which the data source is located.
Geo Location - City	Enter the city in which the data source is located.

Configuring data discovery and classification for AWS S3

In the **Data discovery and classification** section of the **Onboard a new data source** dialog box, you configure one or more scans to run on the data source.

This stage is optional and you can skip it now, and configure classification later on.

Even if you configure scans at this point, you can configure the data source so that scans do not run on it. You can activate those scans later.

To configure data discovery and classification for AWS S3:

1. Carry out the registration procedure described above. You now see the **Data discovery and classification** section of the **Onboard a new data source** dialog box.

Onboarding a new data source

1. Registration

2. Classification

3. Auditing

4. Summary

Data Discovery and Classification On

Manage the selected scans for Data Discovery and Classification.
[Data Discovery and Classification scans](#)

To initiate Data Discovery and Classification (DDC), please complete all fields in the form. If not, DDC won't start, but you can always set it up later in the data source settings.

Choose available scan definition and its scanning target path

If no specific target path is chosen for the scan, the entire data source will be scanned

Scan

^

Select scan

▼

Targets: 0

+ Add scan

Enabling (or disabling) scanning for a specific AWS S3 bucket also enables (or disables) scanning for all other S3 buckets onboarded under the same cloud account.

Enable scanning

☒ Enabled

Cancel

Previous

Next

- If you want to skip classification and proceed directly to auditing, toggle the radio button at the top right.
- To select a scan for this data source, click the **Scan** drop-down list and select a scan.

Scan

^

vs-scan

▼

Targets: 1


Target path ⓘ

e.g. folder-name/subfolder-name

+

- In the **Target path** field, type the target path you want to scan and click the **Add** button



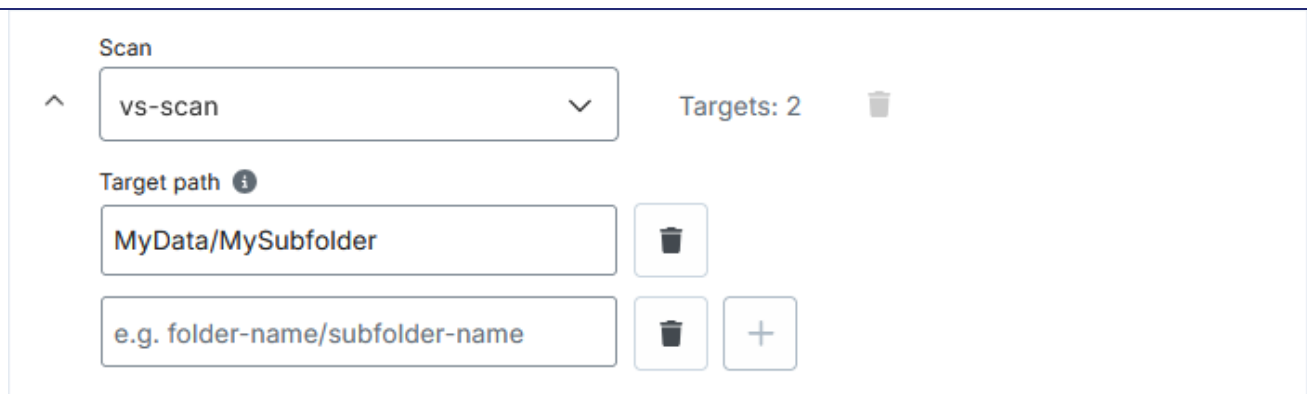

You can repeat this step to add as many target paths as you like.



Note: If you do not enter a **Target path**, the entire data source will be scanned.

5. To add another scan on this data source, click **Add scan**, then repeat steps 3-4 above.
6. Click **Next** to proceed to the next stage, **Auditing**. See below.

Configuring auditing for AWS S3

In the **Auditing** section of the **Onboard a new data source** dialog box, you configure audit to run on the data source.

This stage is optional and you can skip it now, and configure auditing later on.

Even if you configure audits at this point, you can configure the data source so that audits do not run on it. You can activate those audits later.

To configure auditing for AWS S3:

1. Carry out the registration and classification procedures described above. You now see the **Auditing** section of the **Onboard a new data source** dialog box.

Onboard a new data source

✓ 1. Registration

✓ 2. Classification

● 3. Auditing

○ 4. Summary

Auditing

Manage audit policy for monitoring file activities.

[Audit policies](#)

Log destination

☐ Used as a log destination

Log destination * **?**

Select... ▼

Gateway

Gateway * **?**

Select... ▼

Audit policy

Audit policy **?**

Select... ▼

Audit collection

☒ Enabled

Cancel

Previous

Next

2. If you want to skip auditing and proceed directly to the summary, toggle the radio button at the top right.
3. If this AWS S3 bucket is the log destination:
 - a. Check the **Log destination** check box.

Onboard a new data source

1. Registration

2. Classification

3. Auditing

4. Summary

Auditing

Manage audit policy for monitoring file activities.
[Audit policies](#)

To initiate auditing, please complete all fields in the form.
If not, auditing won't start, but you can always configure it later in the data source settings.

Log destination

☒ Used as a log destination

☐ Enable self-monitoring

Bucket Account ID

e.g. 123456789012

Advanced settings

Gateway

Gateway

Select...

Audit collection

☒ Enabled

Cancel

Previous

Next

- b. If you want self-monitoring (that is, in addition to this AWS S3 bucket acting log destination for other buckets, it also acts as log destination for its own logs), check **Enable self-monitoring**.

Onboard a new data source

- 1. Registration
- 2. Classification
- 3. Auditing
- 4. Summary

Auditing

Manage audit policy for monitoring file activities.
[Audit policies](#)

To initiate auditing, please complete all fields in the form.
 If not, auditing won't start, but you can always configure it later in the data source settings.

Log destination

☒ Used as a log destination

☒ Enable self-monitoring

Bucket Account ID *
 e.g. 123456789012

Advanced settings

Gateway

Gateway *
 Select...

Audit policy

Audit policy
 Select...

Audit collection

☒ Enabled

Cancel

Previous

Next

c. Enter the following values:

- **Bucket Account ID:** The account ID of the bucket where the logs are saved.
- **Advanced Settings > Prefix:** If you defined a prefix when creating your CloudTrail trail, enter it here.
- **Advanced Settings > Available Bucket Account IDs:** A comma-separated list of AWS account IDs that are used when auditing buckets in different AWS accounts and sending all the logs to the same log destination.
- **Gateway:** Select the gateway that you configured for the log destination.
- **Audit policy:** Select the audit policy to apply to this AWS S3 data source. This option is available only if you configure this log destination S3 bucket a self-monitoring, and the audit policy is applied to the audit logs pulled from this S3 bucket only.
- **Audit collection:** Leave this toggle on if you want auditing on this S3 bucket enabled once you have onboarded the data source. Disable if you want the data source not to be audited for the time being.

4. If this AWS S3 bucket is **not** the log destination (you must have already designated an AWS S3 bucket as a log destination):

- Leave **Used as Log destination** unchecked.
- Fill in the fields as follows:
 - **Log destination:** Choose the log destination that stores the logs for this data source.

-
- **Gateway:** Select the gateway that pulls the audit data.
 - **Audit policy:** Select the audit policy to apply to this AWS S3 data source. The audit policy is applied to the audit logs pulled from this S3 bucket only.
 - **Audit collection:** Leave this toggle on if you want auditing on this S3 bucket enabled. Toggle off if you want the data source not to be audited for the time being.

5. Click **Next** to proceed to the next stage, **Summary**. See below.

Summary for onboarding an AWS S3 data source

In the **Summary** section of the **Onboard a new data source** dialog box, you confirm your configurations so far.

Onboard a new data source

1. Registration

2. Classification

3. Auditing

4. Summary

Summary

You're almost finished onboarding. Take a moment to review and confirm information

Registration details

Asset type	AWS S3
Display name *	My S3 bucket
Bucket ARN *	arn:aws:s3:::your-bucket1
Bucket name *	your-bucket1
Criticality	2
Used for	Production
Cloud account *	Basic AWS Account
Admin *	a@b.com
Owned by	a@b.com
Country *	United Kingdom
City *	London

Data Discovery and Classification

Feature activation	On
Scan name	vs-scan (paths: MyData/MySubfolder)
Enable scanning	Enabled

Auditing


Feature activation	On
Used as a log destination	Enabled
Enable self-monitoring	Disabled
Bucket Account ID *	763811358905
Gateway *	usc2506110 (10.10.124.29)
Audit collection	Enabled

Cancel

Previous

Onboard data source

For any of the previous sections - **registration**, **classification**, or **auditing** - you can click the edit icon  to return to that section and make changes.

Click on the Onboard data source button  to complete the onboarding process.