


gest() test file


The horizontal coordinates below are proportions from 0 to 1. The duration argument maps that range onto milliseconds. Each string in `label` occupies one equal-width cell and uses the same notation as `ipa()`.

Activation intervals only

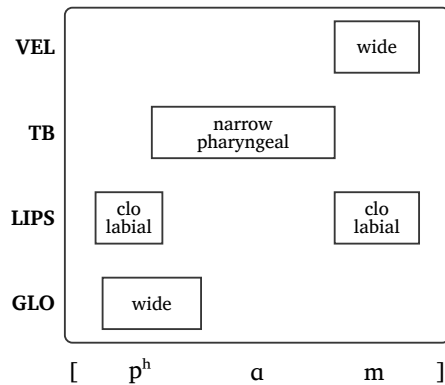


Activation intervals with motions

Here's where keeping things minimal becomes tricky. My initial idea is this: coordinates tied to each argument, but specified separately inside teh function.

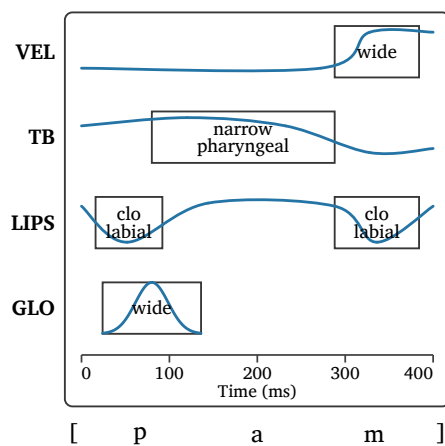

Small API checks

Some `tipa` conversion, an unlabeled interval, the TT tier, automatic tier filtering, a non-round duration, an explicit normal-motion position, scaling, and a bordered score without background grid lines.



Extreme duration layout

The plot expands when necessary to keep unusually wide time labels separate and inside the outer frame.

