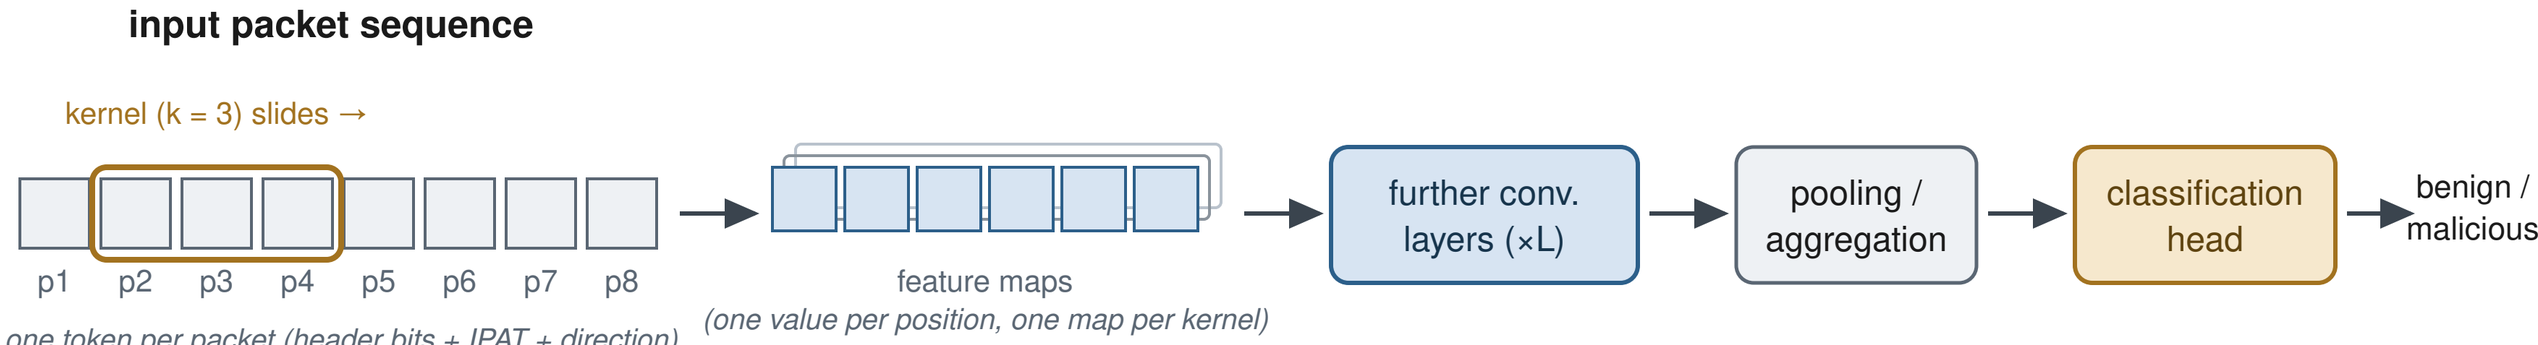
input packet sequence
kernel (k = 3) slides →
p1
p2
p3
p4
p5
p6
p7
p8
one token per packet (header bits + IPAT + direction)
feature maps
(one value per position, one map per kernel)
further conv. layers (×L)
pooling / aggregation
classification head
benign / malicious