


JointDiff: Framework

Independent forward q

- Continuous → Add Gaussian noise to clean continuous trajectories (Y_0), leading to Y_s
- Discrete → Add uniform discrete noise to clean possession events (E_0), leading to E_s

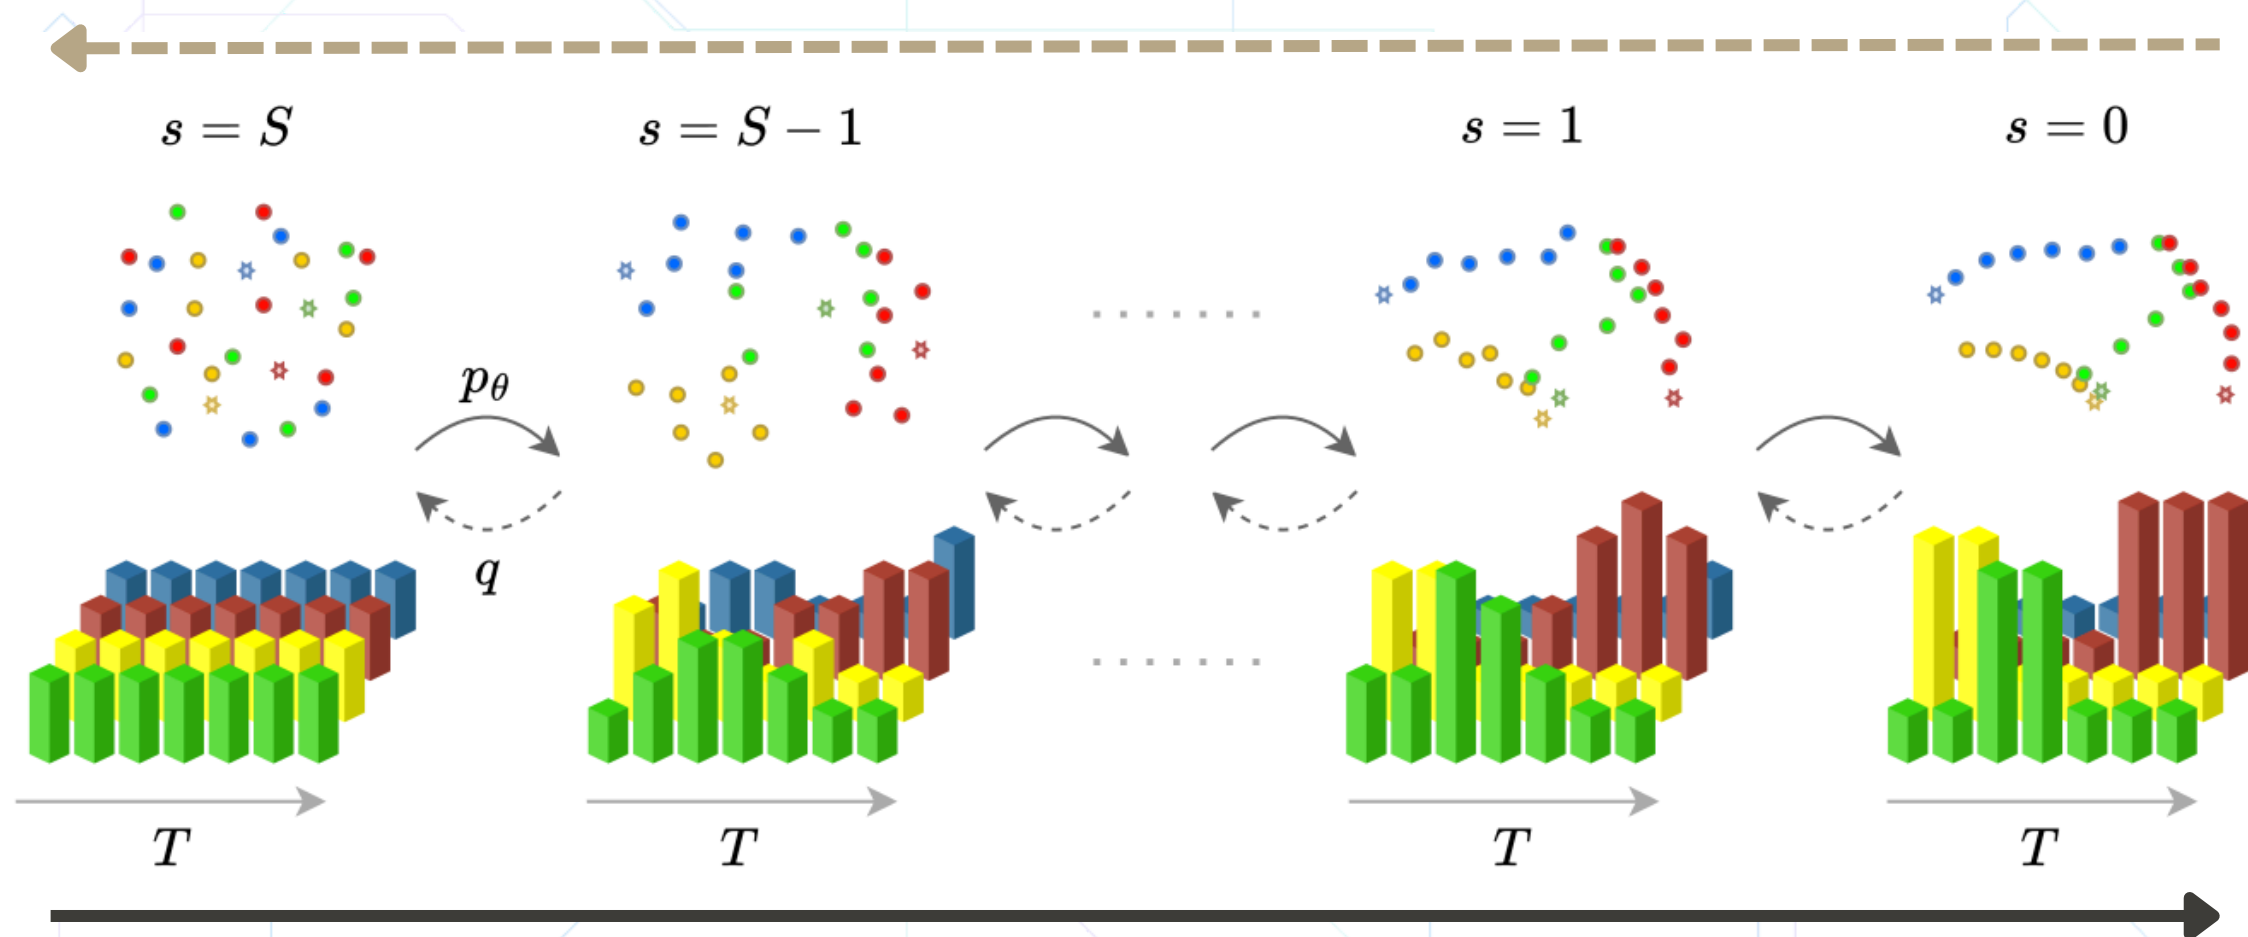

Dependent reverse p_θ

- Continuous → Predict the injected gaussian noise conditioned on joint input $X_s = (Y_s, E_s)$
- Discrete → Predict the clean possession events conditioned on joint input $X_s = (Y_s, E_s)$