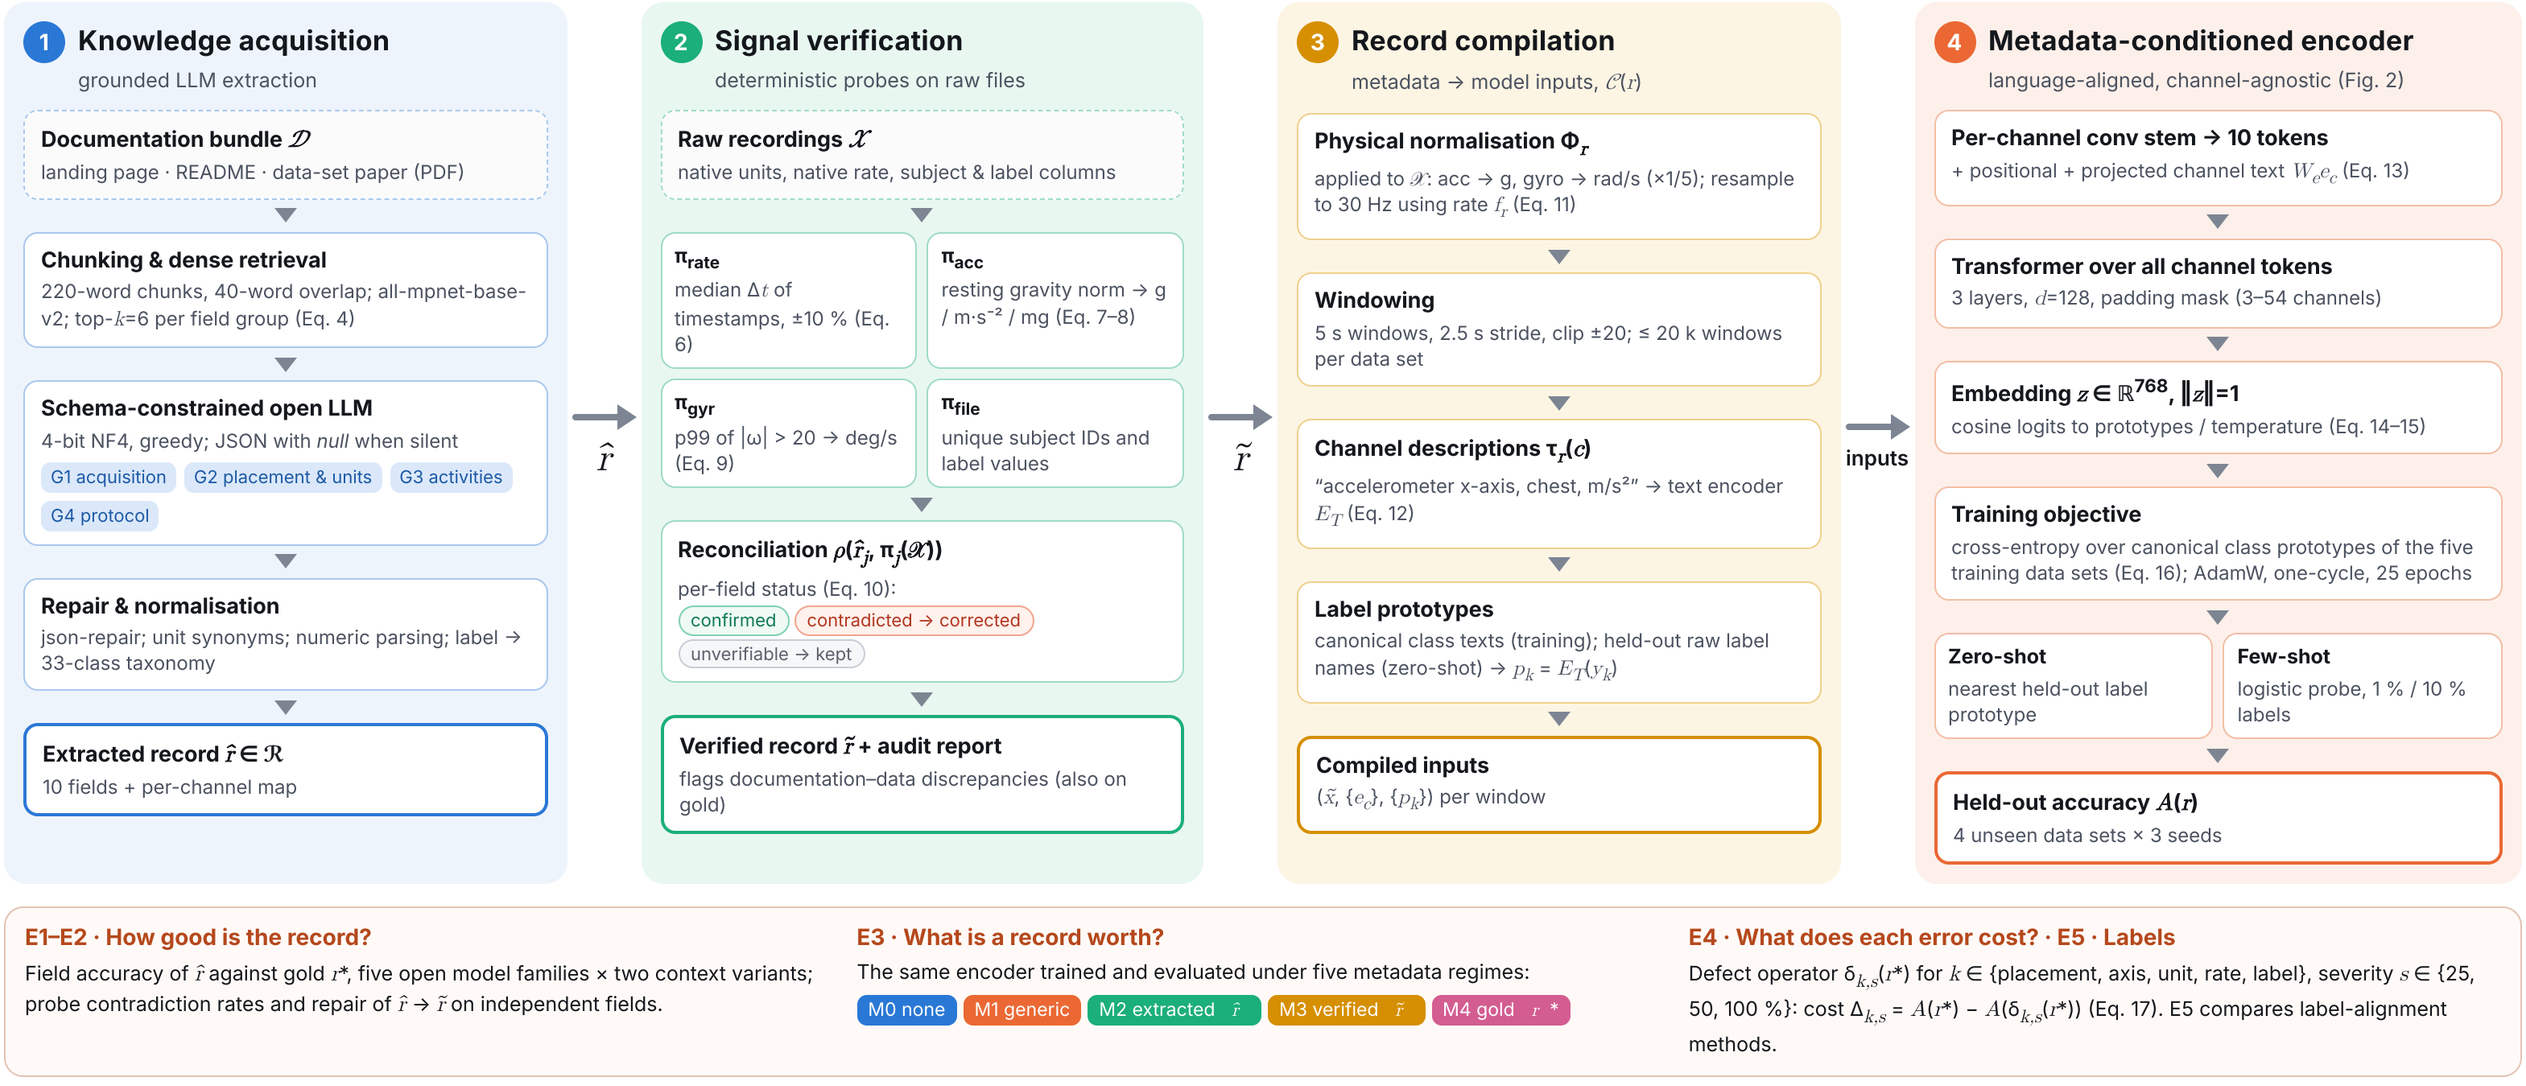


E1–E2 · How good is the record?

Field accuracy of $\hat{r}$ against gold r^*, five open model families × two context variants; probe contradiction rates and repair of $\hat{r} \to \tilde{r}$ on independent fields.

E3 · What is a record worth?

The same encoder trained and evaluated under five metadata regimes:

M0 none · M1 generic · M2 extracted $\hat{r}$ · M3 verified $\tilde{r}$ · M4 gold r^*

E4 · What does each error cost? · E5 · Labels

Defect operator $\delta_{k,s}(r^*)$ for $k \in$ {placement, axis, unit, rate, label}, severity $s \in$ {25, 50, 100 %}: cost $\Delta_{k,s} = A(r^*) - A(\delta_{k,s}(r^*))$ (Eq. 17). E5 compares label-alignment methods.