



Universität des Saarlandes  
Max-Planck-Institut für Informatik  
AG5



# Learning Rules With Categorical Attributes from Linked Data Sources

Masterarbeit im Fach Informatik  
Master's Thesis in Computer Science  
von / by

André de Oliveira Melo

angefertigt unter der Leitung von / supervised by

Dr. Martin Theobald

begutachtet von / reviewers

Dr. Martin Theobald  
Prof. Dr. Max Mustermann

Dezember / December 2012



**Hilfsmittelerklärung**

Hiermit versichere ich, die vorliegende Arbeit selbständig verfasst und keine anderen als die angegebenen Quellen und Hilfsmittel benutzt zu haben.

**Non-plagiarism Statement**

Hereby I confirm that this thesis is my own work and that I have documented all sources used.

Saarbrücken, den 27. Dezember 2012,

(André de Oliveira Melo)

**Einverständniserklärung**

Ich bin damit einverstanden, dass meine (bestandene) Arbeit in beiden Versionen in die Bibliothek der Informatik aufgenommen und damit veröffentlicht wird.

**Declaration of Consent**

Herewith I agree that my thesis will be made available through the library of the Computer Science Department, Saarland University.

Saarbrücken, den 27. Dezember 2012,

(André de Oliveira Melo)

*To my father Cicero, my mother Marlene and my sister Carolina*

- Andre



# *Abstract*

Inductive Logic Programming (ILP) is a consolidated technique for mining Datalog rules in knowledge bases. Nevertheless, it's inherently expensive and the hypothesis search space grows combinatorially with the knowledge base size. This problem is even more dramatic when literals with constants are considered, therefore, it usually requires very aggressive pruning for making it feasible. With the objective of efficiently learning rules with interesting ranges for numerical attributes, we propose a preprocessing step and an extension to ILP top-down algorithm, that suggests the most interesting categorical constants to be added in the refinement step. It consists of building a Lattice that expresses the correlations between a root numerical attribute and multiple categorical relations and their constants. This lattice is then queried by the core ILP algorithm in the refinement step and provides a list of refinement suggestions ordered by a defined interestingness measure. This thesis discusses how to efficiently build the lattice, how it's incorporated in the core learning algorithm and evaluates different interestingness measures.



# *Acknowledgements*

Firstly, I would like to thank my advisor Dr. Martin Theobald, for his invaluable guidance. I feel deeply grateful for his technical assistance and motivational encouragement.

A special note of thanks to Prof. Dr. Max Mustermann for giving me the opportunity to pursue this thesis at Information and Database Systems department under his supervision. It was a very enriching and pleasant experience to write my Master Thesis here.



# Contents

<b>Abstract</b>	<b>vi</b>
<b>Acknowledgements</b>	<b>viii</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Motivation . . . . .	2
1.2 Contributions . . . . .	4
1.3 Outline . . . . .	5
<b>2 Related Work</b>	<b>7</b>
2.1 Logic Programming . . . . .	7
2.2 Inductive Logic Programming . . . . .	7
2.3 First Order Inductive Learning . . . . .	7
2.4 Mining Optimized Rules for Numeric Attributes . . . . .	7
2.5 Minimum Description Length . . . . .	7
2.6 Semantic Web . . . . .	7
2.7 Linked Open Data . . . . .	7
<b>3 Learning Rules With Numerical and Categorical Attributes</b>	<b>9</b>
3.1 Interesting Rules . . . . .	9
3.2 Categorical Relation Definition . . . . .	9
3.2.1 Absence or Presence of a Relation as Categories . . . . .	10
3.3 Preprocessing . . . . .	11
3.3.1 Relation Preprocessing . . . . .	11
3.3.2 . . . . .	12
3.4 Correlation Lattice . . . . .	12
3.4.1 Pruning Opportunities . . . . .	14
3.4.2 Distribution Divergence Measures . . . . .	18
3.4.3 Heuristics . . . . .	18
3.5 Incorporating Correlation Lattice into Core ILP Algorithm . . . . .	19
<b>4 Algorithmic Framework</b>	<b>21</b>
4.1 Knowledge Base Backend . . . . .	21
4.2 Preprocessing . . . . .	21
4.2.1 Correlation Lattice . . . . .	21

4.3 ILP Core Algorithm . . . . .	23
<b>5 Experiments</b>	<b>25</b>
 List of Figures	 <b>25</b>
List of Tables	<b>29</b>
 Bibliography	 <b>31</b>

# Chapter 1

## Introduction

In the last years, the volume of semantic data available, in particular RDF, has dramatically increased. Initiatives like the W3C Semantic Web, which provides a common standard that allows data to be shared and reused across different applications, and the Linked Open Data, which provides linkages between different datasets that were not originally interconnected, have great contribution in such development. Moreover, advances in information extraction have also made strong contribution, by crawling multiple non-structured resources in the Web and extracting RDF facts.

Nevertheless, information extraction still has its limitations and many of sources might contain contradictory or uncertain information. Therefore, many of the extracted datasets suffer from incompleteness, noise and uncertainty.

In order to reduce such problems, one can apply to the knowledge base a set of inference rules that describes its domain. With that, it's possible to resolve contradictions or strengthen or weaken their confidence values. It's also possible to derive new facts that are originally not existent due to incompleteness. Such inference rules can be of two types:

1. *Hard Rules*: Consistency constraints which might represent functional dependencies, functional or inverse-functional properties of predicates or Mutual exclusion. For example:

- $marriedTo(x, y) \leftarrow marriedTo(y, x), (x \neq y)$
- $grandChildOf(x, y) \leftarrow childOf(x, z), childOf(z, y)$
- $parentOf(x, y) \leftarrow childOf(y, x)$
- $(z = y) \leftarrow wasBornIn(x, z), wasBornIn(x, y)$

2. *Soft Rules*: Weighted Datalog rules that frequently, but not always hold in the real world. As they also produce incorrect information, each rule itself must have a confidence value which should be applied to derived facts, for example married people live in the same place as their partner has confidence 0.8:

$$livesIn(x, y) \leftarrow marriedTo(x, z)livesIn(z, y) [0.8]$$

So, if we have an incomplete knowledge base, which lacks information about where *Michelle Obama* lives, but we know that she's married to *Barack Obama* and he lives in *Washington, D.C.*, both with confidence 1, we could then apply this soft rule to derive the fact *livesIn(MichelleObama, WashingtonDC)* with confidence 0.9.

Such rules are rarely known beforehand, or are too expensive to be manually extracted. Nevertheless, the data itself can be used to mine these rules using *Inductive Logic Programming (ILP)*.

ILP is a well-established framework for inductively learning relational descriptions (in the form of logic programs) from examples and background knowledge. Given a logical database of facts, an ILP system will generate hypothesis in a pre-determined order and test them against the examples. However in a large knowledge base, ILP becomes too expensive as the search space grows combinatorially with the knowledge base size and the larger the number of examples, the more expensive it is to test each of the hypothesis.

rules with constants might be really interesting.

Moreover, testing hypothesis with constants increases the search space dramatically, making it unfeasible to test all possible hypothesis with constants in a large knowledge base. In such case, it's necessary to arbitrarily reduce the search by restricting the set of constants to be included in ...

data mining, rule mining, datalog rules

talk a bit about ilp

## 1.1 Motivation

Given the huge size of search space and the great interestingness of rules with constants, we need to smartly prune constants or combinations of constants that , learning datalog rules can be already extremely costly.

Numerical constants are a special case, and they need to be treated differently. Depending on the numerical attribute domain, in case of a continuous real number domain for

example, setting a numerical constant as an individual value will very likely have a very low support and also that would result and extremely large number of possible constants. Therefore, we split the attribute's domain into  $k$  buckets and then check if any of the buckets present any gain in comparison with its correspondent numerical constant-free rule (which we will call base-rule).

For example if we test the hypothesis and we find support=100 and confidence=0.4:

$$isMarriedTo(x, y) \leftarrow hasAge(x, z)$$

and then we split  $z$  into three buckets:

- $k = 1 : z \in [0, 20]$
- $k = 2 : z \in (20, 40]$
- $k = 3 : z \in (40, \infty]$


we then test the hypothesis for each of the three buckets and obtain

- $isMarriedTo(x, y) \leftarrow hasAge(x, z), z \in [0, 20]$   
support=40, confidence=0.1
- $isMarriedTo(x, y) \leftarrow hasAge(x, z), z \in (20, 40]$   
support=40, confidence=0.5
- $isMarriedTo(x, y) \leftarrow hasAge(x, z), z \in (40, \infty]$   
support=20, confidence=0.8

for  $k=2$  and  $k=3$ , the hypothesis has significant gain by specifying numerical constants. Adding a relation to the body might produce totally different support and confidence distributions along the buckets. For example, if we add the relation  $hasChild(x, a)$ , we could obtain other interesting rules:

- $isMarriedTo(x, y) \leftarrow hasAge(x, z)hasChild(x, a)$   
support=50, confidence=0.625
- $isMarriedTo(x, y) \leftarrow hasAge(x, z)hasChild(x, a), z \in [0, 20]$   
support=2, confidence=0.5
- $isMarriedTo(x, y) \leftarrow hasAge(x, z)hasChild(x, a), z \in (20, 40]$   
support=30, confidence=0.7

- $isMarriedTo(x, y) \leftarrow hasAge(x, z)hasChild(x, a), z \in (40, \infty]$   
support=18, confidence=0.9

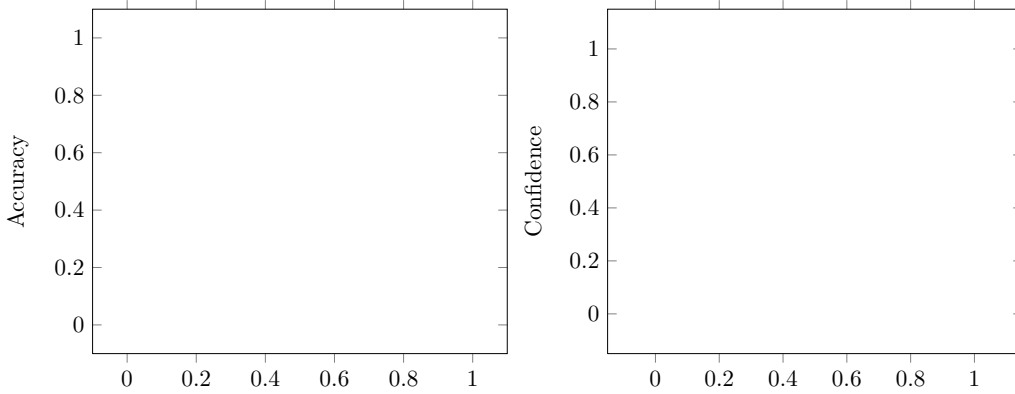

Adding some literals might not bring any gain or even loss in confidence, but when bucketing per age, present a different distribution, so we consider them interesting as well. An uninteresting rule would be a rule that

Nevertheless, adding some relations with no correlation to the rule might not generate any interesting rules if

## 1.2 Contributions

In this Thesis, we propose a pre-processing step to build a graph we call Correlation Lattice for each numerical property. In each graph, that has a numerical property as root, we first query the frequency distribution on the numerical attribute, then split them in  $k$  buckets. Then we pick a set of  $c$  categorical properties that can be joined with the root, and analyze how the distribution of sub-population created by joining them with the root is affected. Afterwards we try to combine each of the categories and see if they still produce interesting sub-populations, like in frequent set mining.

We also evaluate different heuristics and interestingness measures and their efficiency in finding rules with numerical intervals.

In a clause containing a numerical attribute in the body, we can obtain a support and accuracy as well as support value for each of the buckets. Therewith, we can search the most interesting intervals that satisfies the support and accuracy thresholds

With that, during the ILP algorithm, once we add one of the root properties, we can then search for the most interesting categorical properties that could result in different accuracy distributions. For every categorical property we can also suggest the most

interesting constants and other categorical properties to be combined in a subcategory of both.

### **1.3 Outline**





## **Chapter 2**

# **Related Work**

### **2.1 Logic Programming**

### **2.2 Inductive Logic Programming**

### **2.3 First Order Inductive Learning**

### **2.4 Mining Optimized Rules for Numeric Attributes**

[\[1\]](#)

### **2.5 Minimum Description Length**

[\[2\]](#)

### **2.6 Semantic Web**

### **2.7 Linked Open Data**



## Chapter 3

# Learning Rules With Numerical and Categorical Attributes

### 3.1 Interesting Rules

In this section we formally define what kind of rules we are interested in obtaining with the algorithm proposed in this thesis. As briefly explained in the introduction, the objective learning with numerical attributes, focusing on searching ranges in the numerical domain that satisfy support and accuracy thresholds.

Trying to learn numerical ranges for a base-rule that already satisfies accuracy threshold is considered uninteresting, as the gain would be probably small

### 3.2 Categorical Relation Definition

In this section, we formally define a categorical relation as used in the Correlation Lattice.

First of all, a candidate relation must be joined with root relation's 1<sup>st</sup> argument (assuming that the numerical attribute is in the 2<sup>nd</sup> argument).

A candidate categorical relation  $r(x, y)$ , should be equivalent a non-injective function:

$$\begin{aligned} r(x, y) &\equiv f : X \rightarrow Y, \quad s.t. |Y| < |X| \text{ and } |Y| > 1 \\ \nexists g : Y &\rightarrow X, \quad s.t. f(g(x)) = x, \quad \forall x \in X \end{aligned}$$

We can define subsets of  $X_i \in X$ , with which of them belonging to one category  $y_i \in Y$ :

$$\begin{aligned} X_i &\subset X \quad s.t. X_i = \{x \in X \mid f(x) = y_i, y_i \in Y\} \\ X &= \bigcup_{i=1}^n X_i \text{ and } X_i \cap X_j = \emptyset, \quad \forall i, j \in [1, n], i \neq j \end{aligned}$$

We can also broaden this definition by composing functional relations to a categorical or multiple categorical relations:

If we have:

$$r_1(x, y) \equiv f_1 : X \rightarrow Y$$

$$r_2(y, z) \equiv f_2 : Y \rightarrow Z$$

Where at least one of them is categorical, then  $r'(x, z) \equiv f : X \rightarrow Z$ , where  $r'(x, z) = r_2(f_1(x), z)$  is also categorical

Numerical properties can also be turned into a categorical, by simply applying a bucketing function that maps a numerical domain into a finite set of  $k$  buckets:

$$b : \mathbb{N} \rightarrow B, \text{ where } B = \{1, 2, \dots, k\}$$

So a numerical property:

$$r(x, y) \equiv f : X \rightarrow \mathbb{N}$$

combined with a bucketing function  $b$ ,  $r'(x, b(y))$  would be discretized and applicable in the Correlation Lattice.

(Then talk about non-categorical relations as categorical by considering its presence/absence)

Types are also covered by this definition. If we consider  $r = rdf : type$  we see that  $r$  which maps entities into types satisfies the definition presented before.

### 3.2.1 Absence or Presence of a Relation as Categories

Another possibility is to define categories for presence or absence of relations. With this approach, one can also include non-categorical relations into the Correlation Lattice and have insight about how the presence or absence of such relation affects the distribution of root's numerical attribute.

As in this thesis we are under open world assumption and we don't consider negated literals in the hypothesis, we ignore the absence and just include the presence of relations in the lattice.

### 3.3 Preprocessing

In this section, we will present the preprocessing steps required by our proposed algorithm. It basically consists of first building a graph with the knowledge building a joinable relations map for each of the four join patterns, according to relations domain and range types as well as support threshold. Afterwards, we search the available categorical properties for each numerical relation that will be used in the Correlation Lattice. At last we build the so called Correlation Lattice, which belongs to the preprocessing step but will be discussed in the next Section [3.4](#).

#### 3.3.1 Relation Preprocessing

In this step, we focus on creating for each of the four join patterns between two relations:

- Argument 1 on Argument 1: e.g. *hasIncome(x,y)hasAge(x,z)*
- Argument 1 on Argument 2: e.g. *hasIncome(x,y)isMarriedTo(z,x)*
- Argument 2 on Argument 1: e.g. *livesIn(y,x)isLocatedIn(x,z)*
- Argument 2 on Argument 2: e.g. *livesIn(y,x)wasBornIn(z,x)*

##### 3.3.1.1 Exploiting Relation Range and Domain Types

A knowledge base is expected to have an ontology defining the structure of the stored data (the types of entities and their relationships). Additionally, every relation's range (type of 1<sup>st</sup> argument) and domain (type of 2<sup>nd</sup> argument) should be defined. These information can help us identify the allowed joining relations for each join pattern.

Assuming that the knowledge base has its type hierarchy described with the relation *rdfs : subclassOf* and both argument types from each of the relations declared with *rdfs : domain* and *rdfs : range* it's a really straightforward task.

For every possible pair of relations, we simply try to match the joining arguments from the 2 joining relations. We check whether they are equal or if one can be subsumed by the other. If so, then theoretically the pair of relations can be joined, or in other words, the type hierarchy allows them to be joined. The algorithm for performing such task is shown in the pseudo-code below:

Nevertheless, it might be that in the knowledge base, the cardinality of such join might be zero or simply not exceed the support threshold. Thus, it's worth to that beforehand, and that's what will be explained in the next section.

---

**Algorithm 1:** Checks whether two relations are joinable for a given join pattern

---

**Input:** Relation  $r_i, r_j$ , Argument  $arg_i, arg_j$

**Output:** True if  $arg_i$  from  $r_i$  joins with  $arg_j$  from  $r_j$ , False otherwise

```

switch  $arg_i$  do
| case 1
|    $\lfloor type_i \leftarrow r_i.domain ;$ 
| case 2
|    $\lfloor type_i \leftarrow r_i.range ;$ 
switch  $arg_j$  do
| case 1
|    $\lfloor type_j \leftarrow r_j.domain ;$ 
| case 2
|    $\lfloor type_j \leftarrow r_j.range ;$ 
if  $type_i = type_j$  or  $subsumes(type_i, type_j)$  or  $subsumes(type_j, type_i)$  then
|   return true;
else
|   return false;

```

---

### 3.3.1.2 Exploiting Support Monotonicity

As seen in (??), support is the only monotonically decreasing measure in top-down ILP. So we know that by adding any literals to the hypothesis, we can only get a smaller or equal support. Therefore, for each pair of joinable relations in each of the join patterns, we can query the knowledge base and check whether they have enough supporting facts.

Thus, if any pair of relations doesn't reach the minimum support for a given join pattern, we know that any hypothesis containing such join will therefore fail the support test as well, so we don't need to test such hypothesis in the core ILP algorithm.

Applying 1 and 2 on all the possible join combinations and extracting the valid ones, we can build 4 maps joining maps, one for each join pattern. Each map has relations as keys and a set of joinable relations as value. In the refinement step at the ILP algorithm, these maps will be queried in order to obtain the eligible literals to be added.

### 3.3.2

## 3.4 Correlation Lattice

The idea is to build during preprocessing a graph inspired in the Itemset Lattice that describes the influence of different categorical relations on a given numerical attribute's distribution. We call such graph a Correlation Lattice. Comparing to a Itemset Lattice, in a Correlation Lattice we have a set categorical relations (that are joined with root

---

**Algorithm 2:** Checks whether join support exceeds threshold
 

---

**Input:** Relation  $r_i, r_j$ , Argument  $arg_i, arg_j$ , Float  $supportThreshold$ 
**Output:** True if join support exceeds threshold, False otherwise

```

switch ( $arg_i, arg_j$ ) do
  case (1, 1)
     $query \leftarrow$  “select count distinct ?x where { ?x < $r_i$ > ?y . ?x < $r_j$ > ?z }” ;
  case (1, 2)
     $query \leftarrow$  “select count distinct ?x where { ?x < $r_i$ > ?y . ?z < $r_j$ > ?x }” ;
  case (2, 1)
     $query \leftarrow$  “select count distinct ?x where { ?y < $r_i$ > ?x . ?x < $r_j$ > ?z }” ;
  case (2, 2)
     $query \leftarrow$  “select count distinct ?x where { ?y < $r_i$ > ?x . ?z < $r_j$ > ?x }” ;
 $joinSupport \leftarrow$  executeQuery( $query$ );
if  $joinSupport \geq supportThreshold$  then
  | return true;
else
  | return false;

```

---

attribute) instead of items. In addition, Each node in the graph has a associated histogram with the support distribution over the root’s numerical attribute.

To illustrate the idea, let’s analyze a simple real-world example with the *hasIncome* relation. If we have two categorical relations, one strongly correlated to income, e.g. *hasEducation*, and one uncorrelated (or very weakly correlated), e.g. *wasBornInMonth*.

Let’s assume that for the relation *wasBornInMonth*( $x, y$ ) we have the 12 months from the Gregorian Calendar as constants and for *hasEducation*( $x, y$ ) we can have 10 different categorical constants for  $y$ : “Preschool”, “Kindergarten”, “ElementarySchool”, “MiddleSchool”, “Highschool”, “Professional School”, “Associate’s degree”, “Bachelor’s degree”, “Master’s degree” and “Doctorate degree”.

It’s expected that the income distribution will be roughly the same for people born in any of the months, whereas for different education levels, e.g. Elementary School and Doctoral Degree, their income distribution are expected to be different between them and different from the overall income distribution.

In a further step, we try to join every possible pair of categorical relations and including the constants. For the given, example with the relations *hasEducation* and *wasBornInMonth* we would then create the nodes:

```

hasIncome( $x, y$ )wasBornInMonth( $x, \text{“January”}$ ),hasEducation( $x, \text{“Preschool”}$ )
hasIncome( $x, y$ )wasBornInMonth( $x, \text{“January”}$ ),hasEducation( $x, \text{“Kindergarten”}$ )
...

```

*hasIncome(x,y)wasBornInMonth(x, "January"),hasEducation(x, "Doctorate Degree")*

*hasIncome(x,y)wasBornInMonth(x, "February"),hasEducation(x, "Preschool")*

*hasIncome(x,y)wasBornInMonth(x, "February"),hasEducation(x, "Kindergarten")*

...

*hasIncome(x,y)wasBornInMonth(x, "February"),hasEducation(x, "Doctorate Degree")*

...

*hasIncome(x,y)wasBornInMonth(x, "December"),hasEducation(x, "Preschool")*

*hasIncome(x,y)wasBornInMonth(x, "December"),hasEducation(x, "Kindergarten")*

...

*hasIncome(x,y)wasBornInMonth(x, "December"),hasEducation(x, "Doctorate Degree")*

Based on this idea, we basically check how different categorical relations affect a numerical distribution. Such information, together with other measures like support, provides valuable cues on what categorical attributes and what categorical constants might be the most interesting to be added to the hypothesis in the core ILP algorithm.

3.1 shows how a Correlation Lattice looks like.

### 3.4.1 Pruning Opportunities

In this section we discuss about safe pruning opportunities that can be explored whilst building the Correlation Lattice: support and conditional independence. As these might not be sufficient to reduce lattice size to a feasible level, later, in section(??), we will also discuss possible pruning techniques.


#### 3.4.1.1 Support

As described in ([3]), in top-down ILP every refinement causes the support to decrease, therefore we know that for every node in the Correlation Lattice, its support will be greater or equal than any of its children, so support is a monotonically decreasing measure so we can safely prune a node that doesn't reach the minimum support threshold.

In this thesis, we define support as the absolute frequency of supporting facts.



Figure 3.1: Correlation Lattice example

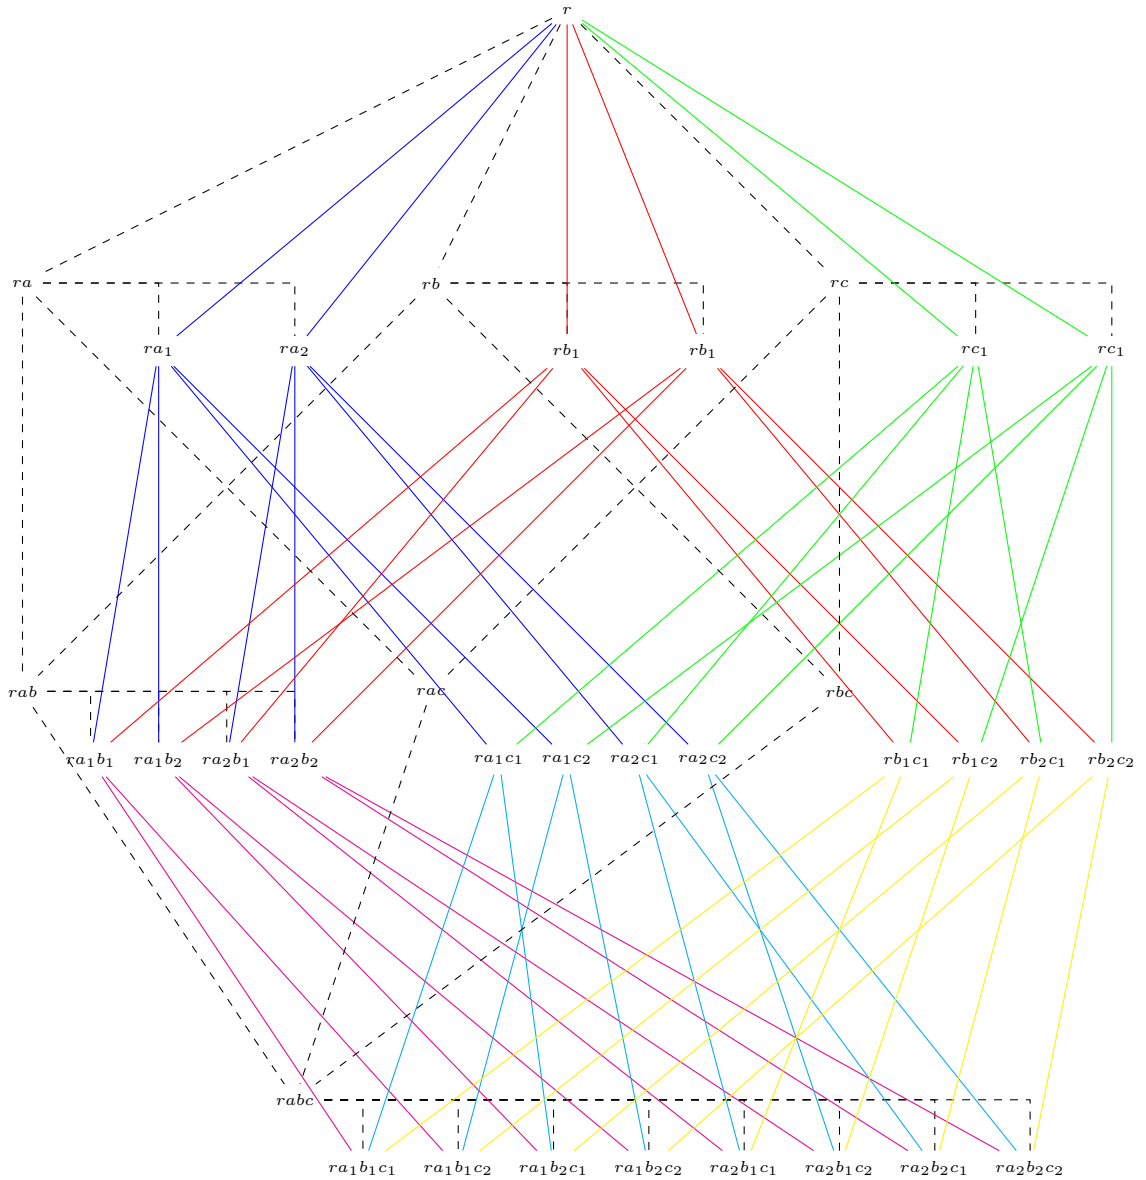

### 3.4.1.2 Independence Checks


By simplicity, we assume that every possible pair of categorical relations are independent given their common parent and we search for evidence to prove the contrary.

For 2 nodes to be joined, they must have a common parent, i.e. two nodes at level  $l$  (with  $l + 1$  literals) are joinable if they share  $l$  literals. Therefore, it's straightforward to calculate the conditional probabilities of each of the joining nodes given the common parent, and estimate the frequency distribution for the conditional independence case.

If we are joining `hasEducation()`...

Let's say we have the following join case:

**Figure 3.2:** Node join example for independence test

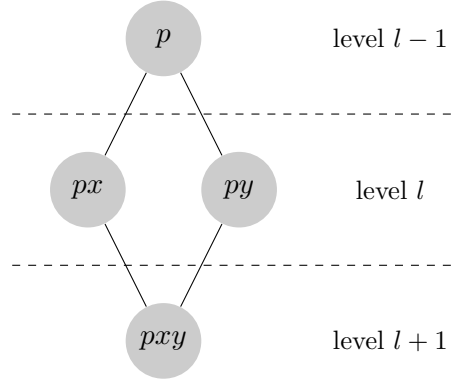

For the example shown in 3.2, we can calculate the conditional probability  $p_i(x|p)$  and  $p_i(y|p)$  assuming conditional independence given common parent  $p$  in order to estimate  $\hat{h}_i(pxy)$ :

$$\begin{aligned}
 p_i(x|py) &= p_i(x|p) \\
 &= \frac{h_i(x)}{h_i(p)} \\
 p_i(y|px) &= p_i(y|p) \\
 &= \frac{h_i(y)}{h_i(p)}
 \end{aligned} \tag{3.1}$$

$$\begin{aligned}
 \hat{h}_i(pxy) &= p_i(x|py)p_i(y|p) * h_i(p) \\
 &= p_i(x|p)h_i(y) \\
 \hat{h}_i(pxy) &= p_i(y|px)p_i(x|p) * h_i(p) \\
 &= p_i(y|p)h_i(x)
 \end{aligned}$$

After that, we query the actual frequency distribution on the Knowledge Base and do an Pearson's chi-squared independence test. As null hypothesis and alternative hypothesis we have:

- $H_0 = x$  and  $y$  are conditionally independent given their common parent  $p$
- $H_1 = x$  and  $y$  are conditionally dependent given their common parent  $p$

Number of degrees of freedom is the number of buckets minus one:

$$df = k - 1$$

We calculate the  $\chi^2$  value:

$$\chi^2 = \sum_{i=1}^k \frac{(h_i - \hat{h}_i)^2}{\hat{h}_i} \quad (3.2)$$

[4]

Then it's possible to obtain the p-value and check whether there's enough confidence to reject the null hypothesis  $H_0$ .

In other words if we find out that  $x$  and  $y$  are conditionally independent given  $p$ , we could rewrite the equation 3.1 as the following rules being equivalents, with similar accuracy distributions:

$$x \leftarrow py \equiv x \leftarrow p$$

$$y \leftarrow px \equiv y \leftarrow p$$

Therefore, we know that if we have  $x$  fixed as head of clauses in the core ILP, and we currently have  $x \leftarrow p$  joining the node  $px$  with  $py$  to obtain the rule  $x \leftarrow py$  doesn't add any information. The same applies for having  $y$ , and obtaining  $y \leftarrow px$  from  $y \leftarrow p$  by joining the same pair of nodes. This property plays an important role in the integration of the correlation lattice into the core ILP as we will explain in more details later in Section (??).

Nevertheless it cannot be safely pruned from the lattice.

In level 1 from Correlation Lattice, nodes can be directly pruned, on the other hand, for further levels, for a node to be pruned by independence, all the possible joins resulting the node must be independent. In level 2, for example, in order to prune the node  $ra_1b_1c_1$ , given that in level 1 the nodes  $ra_1b_1$ ,  $ra_1c_1$  and  $rb_1c_1$  were not pruned. All the three possible join combinations should fail the independence test, i.e.:

$$\begin{aligned} freq(ra_1b_1c_1) &\approx freq(ra_1)p(rb_1|ra_1)p(rc_1|ra_1) \\ &\approx freq(rb_1)p(ra_1|rb_1)p(rc_1|rb_1) \\ &\approx freq(rc_1)p(ra_1|rc_1)p(rb_1|rc_1) \end{aligned} \quad (3.3)$$

This applies to nodes at any level  $l$ , with  $p \leq l$  parents and  $C_2^p$  possible join pairs.

If any of the join pairs has enough evidence of being dependent, then 2 edges are created connecting each of the joined nodes to the result of their join

### 3.4.2 Distribution Divergence Measures

As seen in the previous sections, we are interested in rules whose base-rule has accuracy below threshold, but for one or multiple specific intervals with accuracy above threshold. For this to happen, we need a rule with non-uniform accuracy distribution, or in other words, divergent body and positive examples distributions.

Therefore, we are interested in adding categories that produces distributions different from their parent nodes. In order to measure such divergence between distributions, some of the state-of-the-art such as the following ones can be used.

- Kullback-Leibler [5]:

$$D_{KL}(P||Q) = \sum_i \ln \left( \frac{P(i)}{Q(i)} \right) * P(i) \quad (3.4)$$

- Chi-squared ( $\chi^2$ ):

$$D_{\chi^2}(P||Q) = \sum_i \frac{(P(i) - Q(i))^2}{P(i)} \quad (3.5)$$

- Jensen-Shannon [6]:

$$D_{JS}(P||Q) = \frac{1}{2}D_{KL}(P||M) + \frac{1}{2}D_{KL}(Q||M), \quad (3.6)$$

Where  $P$  and  $Q$  are the distributions to be compared and  $M = \frac{1}{2}(P + Q)$

As discussed in [6], although Jensen-Shannon is computationally more expensive, it has the advantage of being a symmetric and smoothed version of the Kullback-Leibler measure.

### 3.4.3 Heuristics

As seen before, the number of nodes in Correlation Latticegrow exponentially with the number of categorical relations and its constants. For  $n$  categorical relations, each with  $m$  constants, the total number of nodes is  $2^{nm}$ . Frequently, pruning by support and

independence is not sufficient to make it feasible and it's necessary to apply heuristics to prune more aggressively.

Pruning by divergence is clearly not safe. Let's suppose we have a root numerical property  $r(x, y)$ , and two categorical relations  $a(x, z)$  with constants  $A_1$  and  $A_2$  and  $b(x, w)$  with constants  $B_1$  and  $B_2$ . For simplicity, let's assume  $y$  is divided in two buckets and root  $r$  has an uniform distribution  $[0.5 \ 0.5]$  from frequencies  $[2 \ 2]$ . It's possible to have  $ra_1$  and  $ra_2$  as well as  $rb_1$  and  $rb_2$  with the same uniform distribution with frequencies  $[1 \ 1]$ . Nevertheless when combined we can have the following:

$ra_1b_1 : [1.0 \ 0.0]$

$ra_1b_2 : [0.0 \ 1.0]$

$ra_2b_1 : [0.0 \ 1.0]$

$ra_2b_2 : [1.0 \ 0.0]$

As shown above, divergence is not a monotonically decreasing measure, thus it can only be used as heuristics.

Moreover, using a divergence measure alone might also be problematic. Nodes with low support are more likely to present high divergence and then nodes with high support, supposing that they were drawn under the same distribution. Therefore, it's important to use divergence combined with support as pruning heuristics.

Moreover, we are interested not only in rules with high confidence, but also rules with high support so more facts can be derived.

As seen in Section (??), checking for conditional independence of categories is very insightful and can detect equivalent rules like in Figure 3.2 where we know that  $x \leftarrow py \equiv x \leftarrow p$  and  $y \leftarrow px \equiv y \leftarrow p$ . Nevertheless, we cannot prune the node  $pxy$  from the lattice as we  $x$  and  $y$  might not be independent given  $pz$ , and for instance, a rule  $x \leftarrow pyz$  might not be equivalent to  $x \leftarrow py$ .

### 3.5 Incorporating Correlation Lattice into Core ILP Algorithm



## Chapter 4

# Algorithmic Framework

### 4.1 Knowledge Base Backend

For storing and retrieving RDF data we use RDF3X [7]. It has the advantage of being specialized and optimized for RDF data, using a strong indexing approach with compressed B<sup>+</sup>-Tree indices for each of six permutations of *subject (S)*, *predicate (P)* and *object (O)*: *SPO*, *SOP*, *OSP*, *OPS*, *PSO* and *POS*.

RDF3X particularities...

### 4.2 Preprocessing

#### 4.2.1 Correlation Lattice

##### 4.2.1.1 Graph Node

Every node essentially contains the following attributes:

- Set of pointers to parent nodes
- Set of pointers to child nodes
- Set of pointers to constant nodes
- Histogram with facts distribution over root numerical property

#### 4.2.1.2 Building the Correlation Lattice

For building the Correlation Lattice, we start with the root node, which has a numerical property as literal and no constants assigned, e.g. *hasIncome(x,y)*. We then query the distribution of positive examples over the property in the whole Knowledge Base.

*SELECT COUNT ?y WHERE { ?x <hasIncome> ?y } GROUP BY (?y)*

It's also necessary to specify the bucketing technique and the number of buckets in order to extract the histogram from the obtained query results. These buckets are used to build the histograms of all nodes in the graph.

Afterwards, we select the the categorical properties that will be used in the lattice. For each of the selected properties, we join them with the root numerical property (for simplicity we'll assume all the categorical properties are joined with both 1<sup>st</sup> arguments) and we query the distribution again. In the first level, it's necessary to extract a histogram for each of the categorical constants in the selected properties. Therefore, it's a good strategy to group the results also by these categorical constants so If we select *hasEducation* for example, we would then fire the following SPARQL query:

*SELECT COUNT ?z ?y WHERE { ?x <hasIncome> ?y . ?x <hasEducation> ?z }  
GROUP BY (?z,?y)*

With such query, it's possible to extract a histogram for the node *hasIncome(x,y)hasEducation(x,z)* and its correspondent constants.

#### 4.2.1.3 Searching Rules in Correlation Lattice

In the Correlation Lattice itself, it's possible to extract valuable rules. Given its characteristic of all the relations being joined on the same root argument, those rules represent how different categories are related along root's numerical constants.

For every non-root node in the Correlation Lattice, any of its parents can be seen as rule's body and the remaining literal as head, e.g.:

Let's denote  $a_i$  as a relation  $a(x, y)$  with constants  $A_i$  for  $y$ , so for example  $a_1 \equiv a(x, A_1)$ :

For the node  $ra_1b_1c_1$  with parents  $ra_1b_1$ ,  $ra_1c_1$  and  $rb_1c_1$ , we can extract and easily evaluate three rules:



$$\begin{aligned}
\text{Rule}_1 : \quad & a_1 \leftarrow b_1 c_1 r \\
\text{supp}_i(\text{Rule}_1) &= h_i(r a_1 b_1 c_1) \\
\text{acc}_i(\text{Rule}_1) &= \frac{h_i(r a_1 b_1 c_1)}{h_i(r b_1 c_1)}
\end{aligned}$$

$$\begin{aligned}
\text{Rule}_2 : \quad & b_1 \leftarrow a_1 c_1 r \\
\text{supp}_i(\text{Rule}_2) &= h_i(r a_1 b_1 c_1) \\
\text{acc}_i(\text{Rule}_2) &= \frac{h_i(r a_1 b_1 c_1)}{h_i(r a_1 c_1)}
\end{aligned}$$

$$\begin{aligned}
\text{Rule}_3 : \quad & c_1 \leftarrow a_1 b_1 r \\
\text{supp}_i(\text{Rule}_3) &= h_i(r a_1 b_1 c_1) \\
\text{acc}_i(\text{Rule}_3) &= \frac{h_i(r a_1 b_1 c_1)}{h_i(r a_1 b_1)}
\end{aligned}$$

Subsequently we can analyze the frequency and confidence distributions and determine whether any of the rules are interesting, using any of the techniques discussed in [??] and find possible interesting intervals.

#### 4.2.1.4

### 4.3 ILP Core Algorithm

The ILP core learning algorithm requires some modifications in order to support the Correlation Lattice. As stated before, we use the top-down search, starting from the most general clauses then further refining them by introducing new substitutions or literals until stopping criteria is reached.

First we need to introduce a new refinement operator that extracts the support and accuracy distributions along a chosen numerical property and searches for interesting ranges. With that there are

```

if (clause contains numerical property) n = numerical property; Lattice l = getLattice(n);
if (no range set to n) supp = querySuppDistribution; acc = queryAccDistribution;

```


In the specialization step, we can detect whether the clause contains any numerical property, which is root of a Correlation Lattice. If so, it can search for interesting ranges numerical ranges,




# Chapter 5

## Experiments

Figure 5.1: levels=3

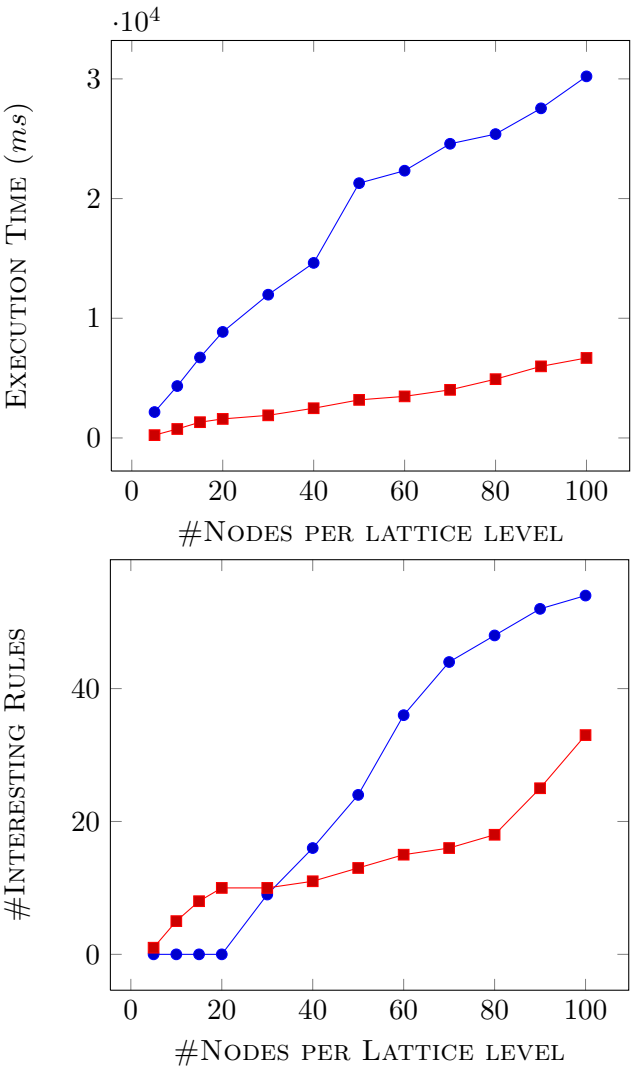

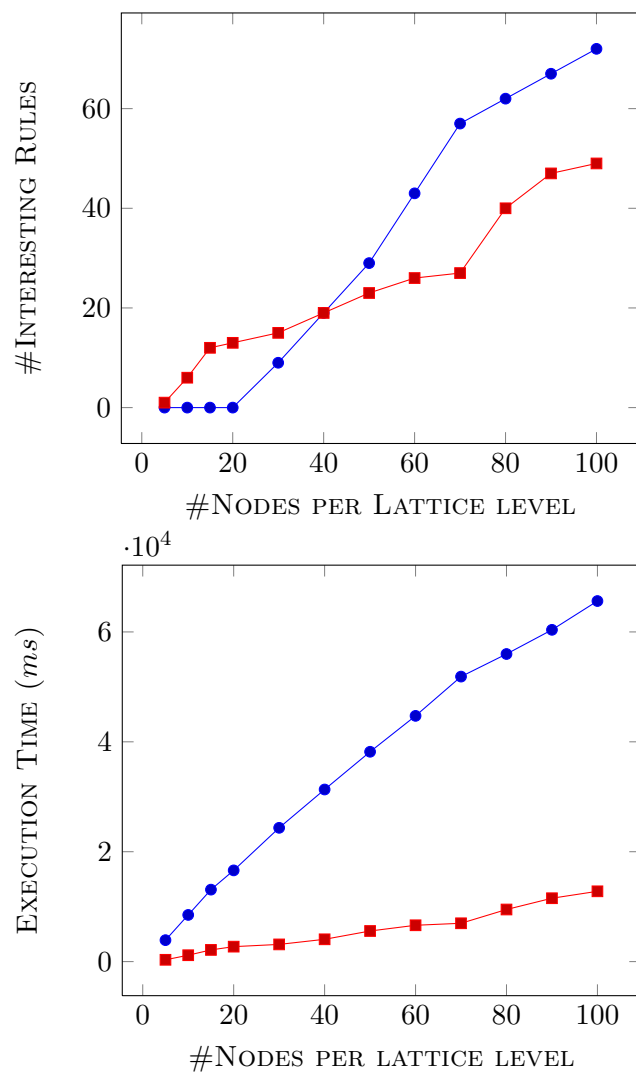**Figure 5.2:** levels=4

# List of Figures

3.1	Correlation Lattice example . . . . .	15
3.2	Node join example for independence test . . . . .	16
5.1	levels=3 . . . . .	25
5.2	levels=4 . . . . .	26



## List of Tables





# Bibliography

- [1] Sergey Brin, Rajeev Rastogi, and Kyuseok Shim. Mining optimized gain rules for numeric attributes. In *Proceedings of the Fifth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 135–144. ACM Press, 1999.
- [2] Toon Calders, Christian W. Günther, Mykola Pechenizkiy, and Anne Rozinat. Using minimum description length for process mining. In *SAC*, pages 1451–1455, 2009.
- [3] Nada Lavrac and Saso Dzeroski. *Inductive Logic Programming: Techniques and Applications*. Ellis Horwood, New York, 1994. URL <http://www-ai.ijs.si/SasoDzeroski/ILPBook/>.
- [4] Szymon Jaroszewicz and Dan A. Simovici. Pruning redundant association rules using maximum entropy principle. In *In Advances in Knowledge Discovery and Data Mining, 6th Pacific-Asia Conference, PAKDD'02*, pages 135–147, 2002.
- [5] S. Kullback and R. A. Leibler. On information and sufficiency. *Ann. Math. Statist.*, 22(1):79–86, 1951.
- [6] J. Briet and P. Harremos. Properties of classical and quantum jensen-shannon divergence. *Physical Review A: Atomic, Molecular and Optical Physics*, 79(5), May 2009. ISSN 1050-2947.
- [7] Thomas Neumann and Gerhard Weikum. The rdf-3x engine for scalable management of rdf data. *The VLDB Journal*, 19(1):91–113, February 2010. ISSN 1066-8888. doi: 10.1007/s00778-009-0165-y. URL <http://dx.doi.org/10.1007/s00778-009-0165-y>.