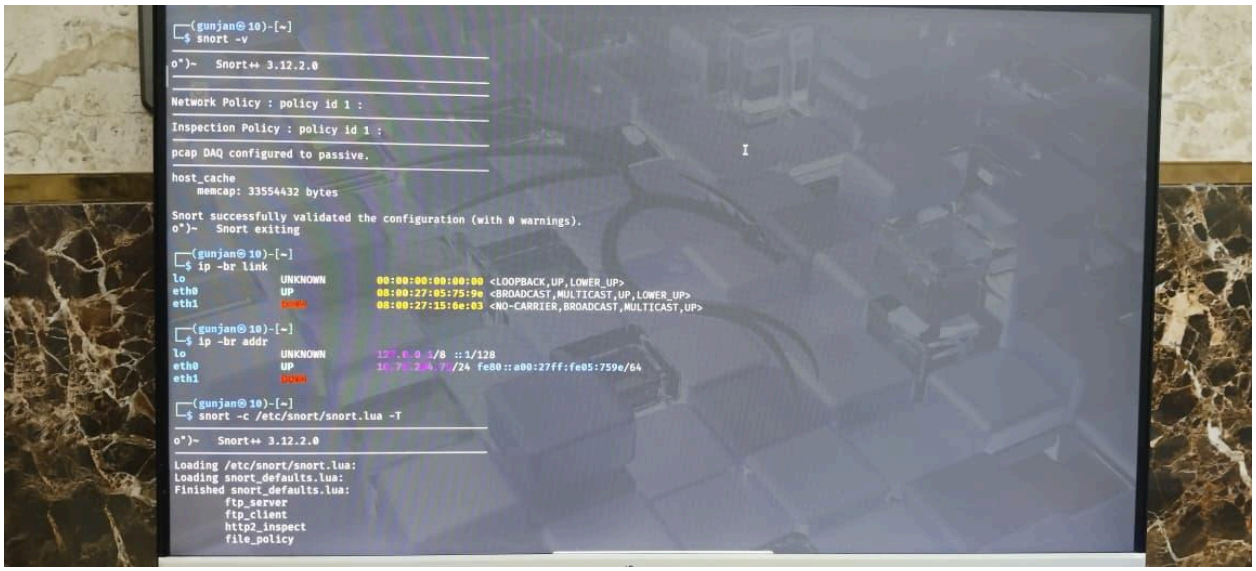


```
┌──(gunjan㉿10)-[~]
└─$ snort -v

o")~   Snort++ 3.12.2.0

Network Policy : policy id 1 :

Inspection Policy : policy id 1 :

pcap DAQ configured to passive.

host_cache
    memcap: 33554432 bytes

Snort successfully validated the configuration (with 0 warnings).
o")~   Snort exiting

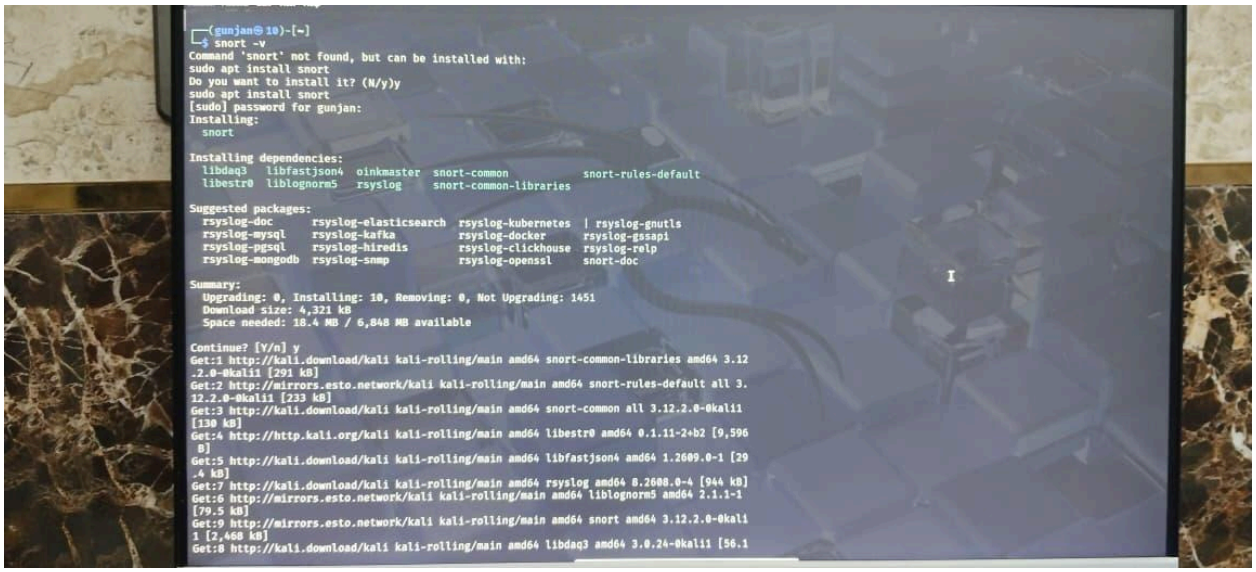
┌──(gunjan㉿10)-[~]
└─$ ip -br link
lo               UNKNOWN        00:00:00:00:00:00 <LOOPBACK,UP,LOWER_UP>
eth0             UP             08:00:27:05:75:9e <BROADCAST,MULTICAST,UP,LOWER_UP>
eth1             DOWN           08:00:27:15:6e:03 <NO-CARRIER,BROADCAST,MULTICAST,UP>

┌──(gunjan㉿10)-[~]
└─$ ip -br addr
lo               UNKNOWN        127.0.0.1/8 ::1/128
eth0             UP             10.7.2.4.7/24 fe80::a00:27ff:fe05:759e/64
eth1             DOWN

┌──(gunjan㉿10)-[~]
└─$ snort -c /etc/snort/snort.lua -T

o")~   Snort++ 3.12.2.0

Loading /etc/snort/snort.lua:
Loading snort_defaults.lua:
Finished snort_defaults.lua:
        ftp_server
        ftp_client
        http2_inspect
        file_policy
```



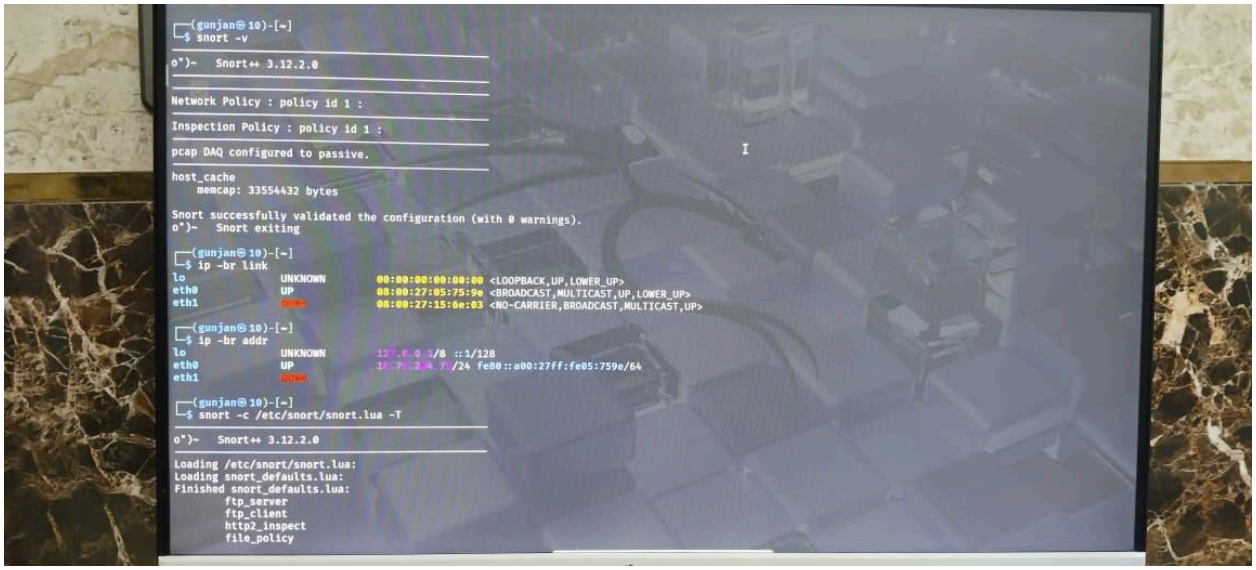
```
┌──(gunjan㉿10)-[~]
└─$ snort -v
Command 'snort' not found, but can be installed with:
sudo apt install snort
Do you want to install it? (N/y)y
sudo apt install snort
[sudo] password for gunjan:
Installing:
  snort

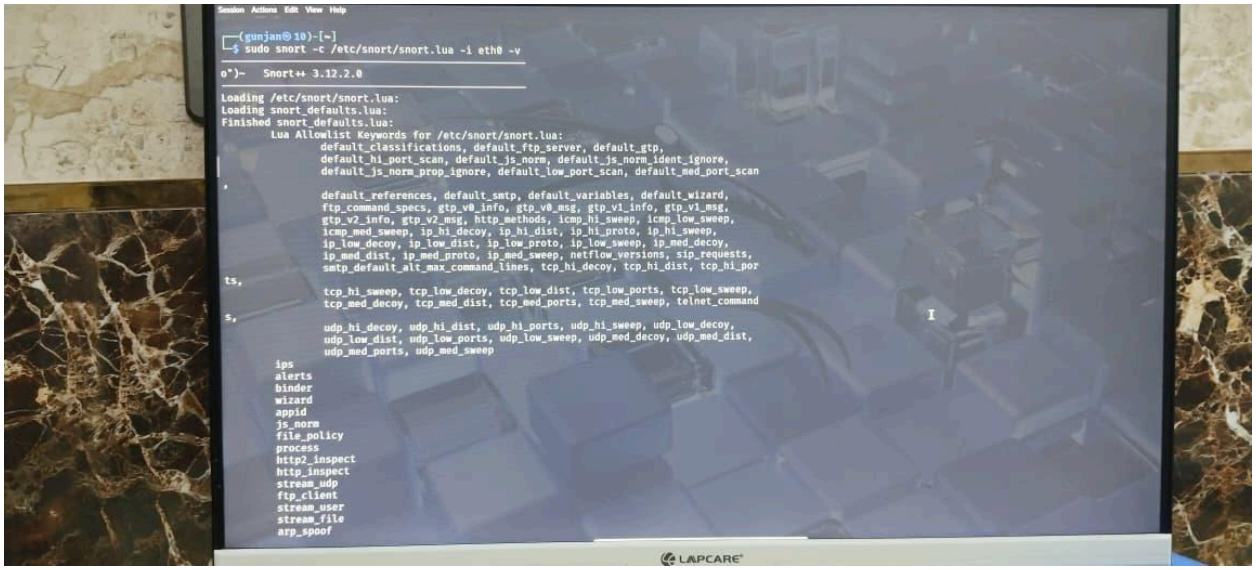
Installing dependencies:
  libdaq3   libfastjson4  oinkmaster  snort-common           snort-rules-default
  libestr0  liblognorm5   rsyslog     snort-common-libraries

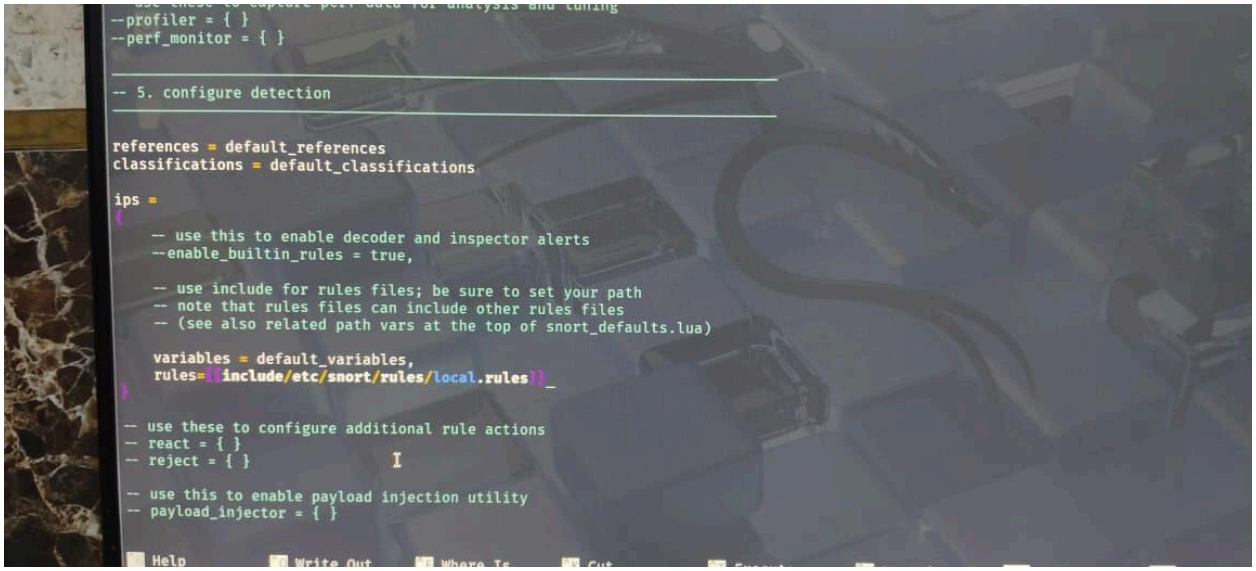
Suggested packages:
  rsyslog-doc       rsyslog-elasticsearch  rsyslog-kubernetes  | rsyslog-gnutls
  rsyslog-mysql     rsyslog-kafka          rsyslog-docker      rsyslog-gssapi
  rsyslog-pgsql     rsyslog-hiredis        rsyslog-clickhouse  rsyslog-relp
  rsyslog-mongodb   rsyslog-snmp           rsyslog-openssl     snort-doc

Summary:
  Upgrading: 0, Installing: 10, Removing: 0, Not Upgrading: 1451
  Download size: 4,321 kB
  Space needed: 18.4 MB / 6,848 MB available

Continue? [Y/n] y
Get:1 http://kali.download/kali kali-rolling/main amd64 snort-common-libraries amd64 3.12
.2.0-0kali1 [291 kB]
Get:2 http://mirrors.esto.network/kali kali-rolling/main amd64 snort-rules-default all 3.
12.2.0-0kali1 [233 kB]
Get:3 http://kali.download/kali kali-rolling/main amd64 snort-common all 3.12.2.0-0kali1
[130 kB]
Get:4 http://http.kali.org/kali kali-rolling/main amd64 libestr0 amd64 0.1.11-2+b2 [9,596
 B]
Get:5 http://kali.download/kali kali-rolling/main amd64 libfastjson4 amd64 1.2609.0-1 [29
.4 kB]
Get:7 http://kali.download/kali kali-rolling/main amd64 rsyslog amd64 8.2608.0-4 [944 kB]
Get:6 http://mirrors.esto.network/kali kali-rolling/main amd64 liblognorm5 amd64 2.1.1-1
[79.5 kB]
Get:9 http://mirrors.esto.network/kali kali-rolling/main amd64 snort amd64 3.12.2.0-0kali
1 [2,460 kB]
Get:8 http://kali.download/kali kali-rolling/main amd64 libdaq3 amd64 3.0.24-0kali1 [56.1
```


(gunjan㉿10)-[~]
$ snort -v
o")~ Snort++ 3.12.2.0
Network Policy : policy id 1 :
Inspection Policy : policy id 1 :
pcap DAQ configured to passive.
host_cache
memcap: 33554432 bytes
Snort successfully validated the configuration (with 0 warnings).
o")~ Snort exiting
(gunjan㉿10)-[~]
$ ip -br link
lo UNKNOWN 00:00:00:00:00:00 <LOOPBACK,UP,LOWER_UP>
eth0 UP 08:00:27:05:75:9e <BROADCAST,MULTICAST,UP,LOWER_UP>
eth1 DOWN 08:00:27:15:6e:03 <NO-CARRIER,BROADCAST,MULTICAST,UP>
(gunjan㉿10)-[~]
$ ip -br addr
lo UNKNOWN 127.0.0.1/8 ::1/128
eth0 UP 10.7.2.24.7/24 fe80::a00:27ff:fe05:759e/64
eth1 DOWN
(gunjan㉿10)-[~]
$ snort -c /etc/snort/snort.lua -T
o")~ Snort++ 3.12.2.0
Loading /etc/snort/snort.lua:
Loading snort_defaults.lua:
Finished snort_defaults.lua:
ftp_server
ftp_client
http2_inspect
file_policy


Session Actions Edit View Help
(gunjan㉿10)-[~]
$ sudo snort -c /etc/snort/snort.lua -i eth0 -v
o")~ Snort++ 3.12.2.0
Loading /etc/snort/snort.lua:
Loading snort_defaults.lua:
Finished snort_defaults.lua:
Lua Allowlist Keywords for /etc/snort/snort.lua:
default_classifications, default_ftp_server, default_gtp,
default_hi_port_scan, default_js_norm, default_js_norm_ident_ignore,
default_js_norm_prop_ignore, default_low_port_scan, default_med_port_scan
,
default_references, default_smtp, default_variables, default_wizard,
ftp_command_specs, gtp_v0_info, gtp_v0_msg, gtp_v1_info, gtp_v1_msg,
gtp_v2_info, gtp_v2_msg, http_methods, icmp_hi_sweep, icmp_low_sweep,
icmp_med_sweep, ip_hi_decoy, ip_hi_dist, ip_hi_proto, ip_hi_sweep,
ip_low_decoy, ip_low_dist, ip_low_proto, ip_low_sweep, ip_med_decoy,
ip_med_dist, ip_med_proto, ip_med_sweep, netflow_versions, sip_requests,
smtp_default_alt_max_command_lines, tcp_hi_decoy, tcp_hi_dist, tcp_hi_por
ts,
tcp_hi_sweep, tcp_low_decoy, tcp_low_dist, tcp_low_ports, tcp_low_sweep,
tcp_med_decoy, tcp_med_dist, tcp_med_ports, tcp_med_sweep, telnet_command
s,
udp_hi_decoy, udp_hi_dist, udp_hi_ports, udp_hi_sweep, udp_low_decoy,
udp_low_dist, udp_low_ports, udp_low_sweep, udp_med_decoy, udp_med_dist,
udp_med_ports, udp_med_sweep
ips
alerts
binder
wizard
appid
js_norm
file_policy
process
http2_inspect
http_inspect
stream_udp
ftp_client
stream_user
stream_file
arp_spoof
LAPCARE


--profiler = { }
--perf_monitor = { }
-- 5. configure detection
references = default_references
classifications = default_classifications
ips =
{
-- use this to enable decoder and inspector alerts
--enable_builtin_rules = true,
-- use include for rules files; be sure to set your path
-- note that rules files can include other rules files
-- (see also related path vars at the top of snort_defaults.lua)
variables = default_variables,
rules=[[include/etc/snort/rules/local.rules]]
}
-- use these to configure additional rule actions
-- react = { }
-- reject = { }
-- use this to enable payload injection utility
-- payload_injector = { }
Help
Write Out
Where Is
Cut