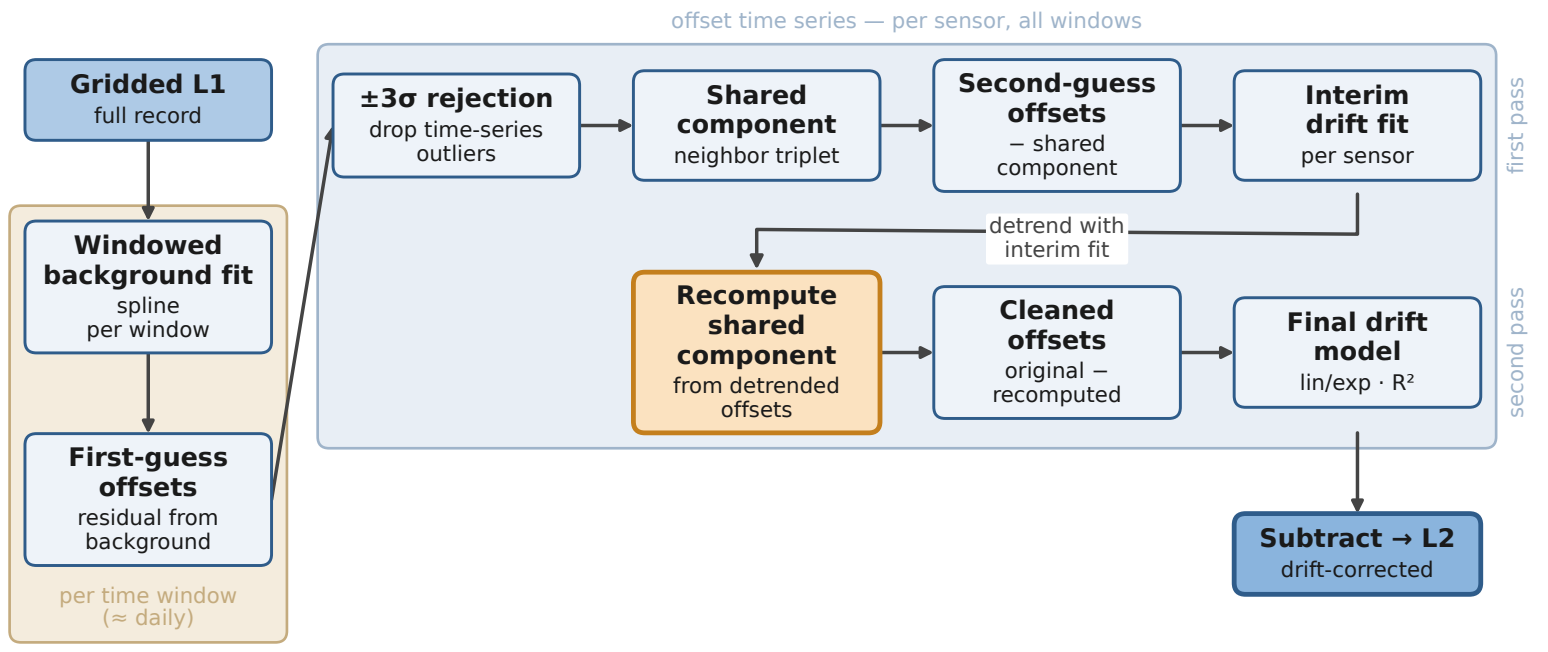
offset time series — per sensor, all windows
Gridded L1
full record
Windowed background fit
spline per window
First-guess offsets
residual from background
per time window (≈ daily)
±3σ rejection
drop time-series outliers
Shared component
neighbor triplet
Second-guess offsets
− shared component
Interim drift fit
per sensor
first pass
detrend with interim fit
Recompute shared component
from detrended offsets
Cleaned offsets
original − recomputed
Final drift model
lin/exp · R²
second pass
Subtract → L2
drift-corrected