


Week 3 — week03_edu.ows

Companion notes for the Orange workflow. Book: chapter 3. Notebook twin: [notebooks/week03_edu.ipynb](#).

1. What this workflow is

A **fan-out of five views** on one table, plus one widget-to-widget link that is not a **Data** link.

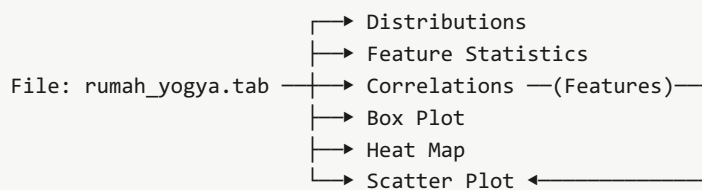

Dataset — `data/rumah_yogya.tab`, 2,200 house listings around Yogyakarta. Six continuous predictors (`luas_bangunan`, `luas_tanah`, `kamar_tidur`, `kamar_mandi`, `umur_bangunan`, `jarak_pusat_km`), two categorical (`kecamatan`, `sertifikat`), and the target `harga` in millions of rupiah. `harga` is declared as the **class variable** in the `.tab` file — remember that, it changes what Correlations shows you.

The idea being taught: a second channel type. The Scatter Plot has *two* inputs wired: **Data** from File and **Features** from Correlations. Clicking a row in Correlations sends that pair of variables down the **Features** channel, and the Scatter Plot re-draws itself on those two axes. This is the first workflow where a widget steers another widget rather than just feeding it rows. Double-click the Correlations → Scatter Plot link to see it.

2. What to do

1. **Distributions** — set the variable to `harga`. Is it skewed? Then set *Split by* to `kecamatan` and look again.
2. **Correlations** — which pair scores highest? Click it and watch the Scatter Plot follow.
3. **Box Plot** — `harga` grouped by `sertifikat`.
4. **Simpson hunt** — in Box Plot, put `harga` by `kecamatan`, then add a Subgroup. Does any comparison reverse once you condition on it?
5. Compare everything with [notebooks/week03_edu.ipynb](#).

Versi mahasiswa. Pembahasan, hal yang perlu diperhatikan, dan jawaban setiap langkah disampaikan di kelas setelah praktikum.