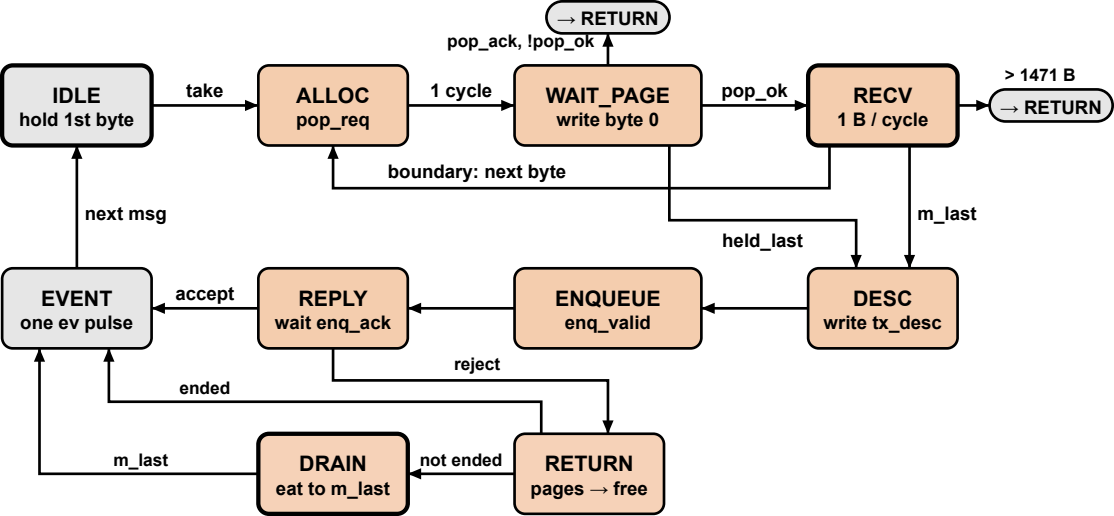
→ RETURN
pop_ack, !pop_ok
IDLE
hold 1st byte
take
ALLOC
pop_req
1 cycle
WAIT_PAGE
write byte 0
pop_ok
RECV
1 B / cycle
> 1471 B
→ RETURN
boundary: next byte
next msg
held_last
m_last
EVENT
one ev pulse
accept
REPLY
wait enq_ack
ENQUEUE
enq_valid
DESC
write tx_desc
reject
ended
m_last
DRAIN
eat to m_last
not ended
RETURN
pages → free