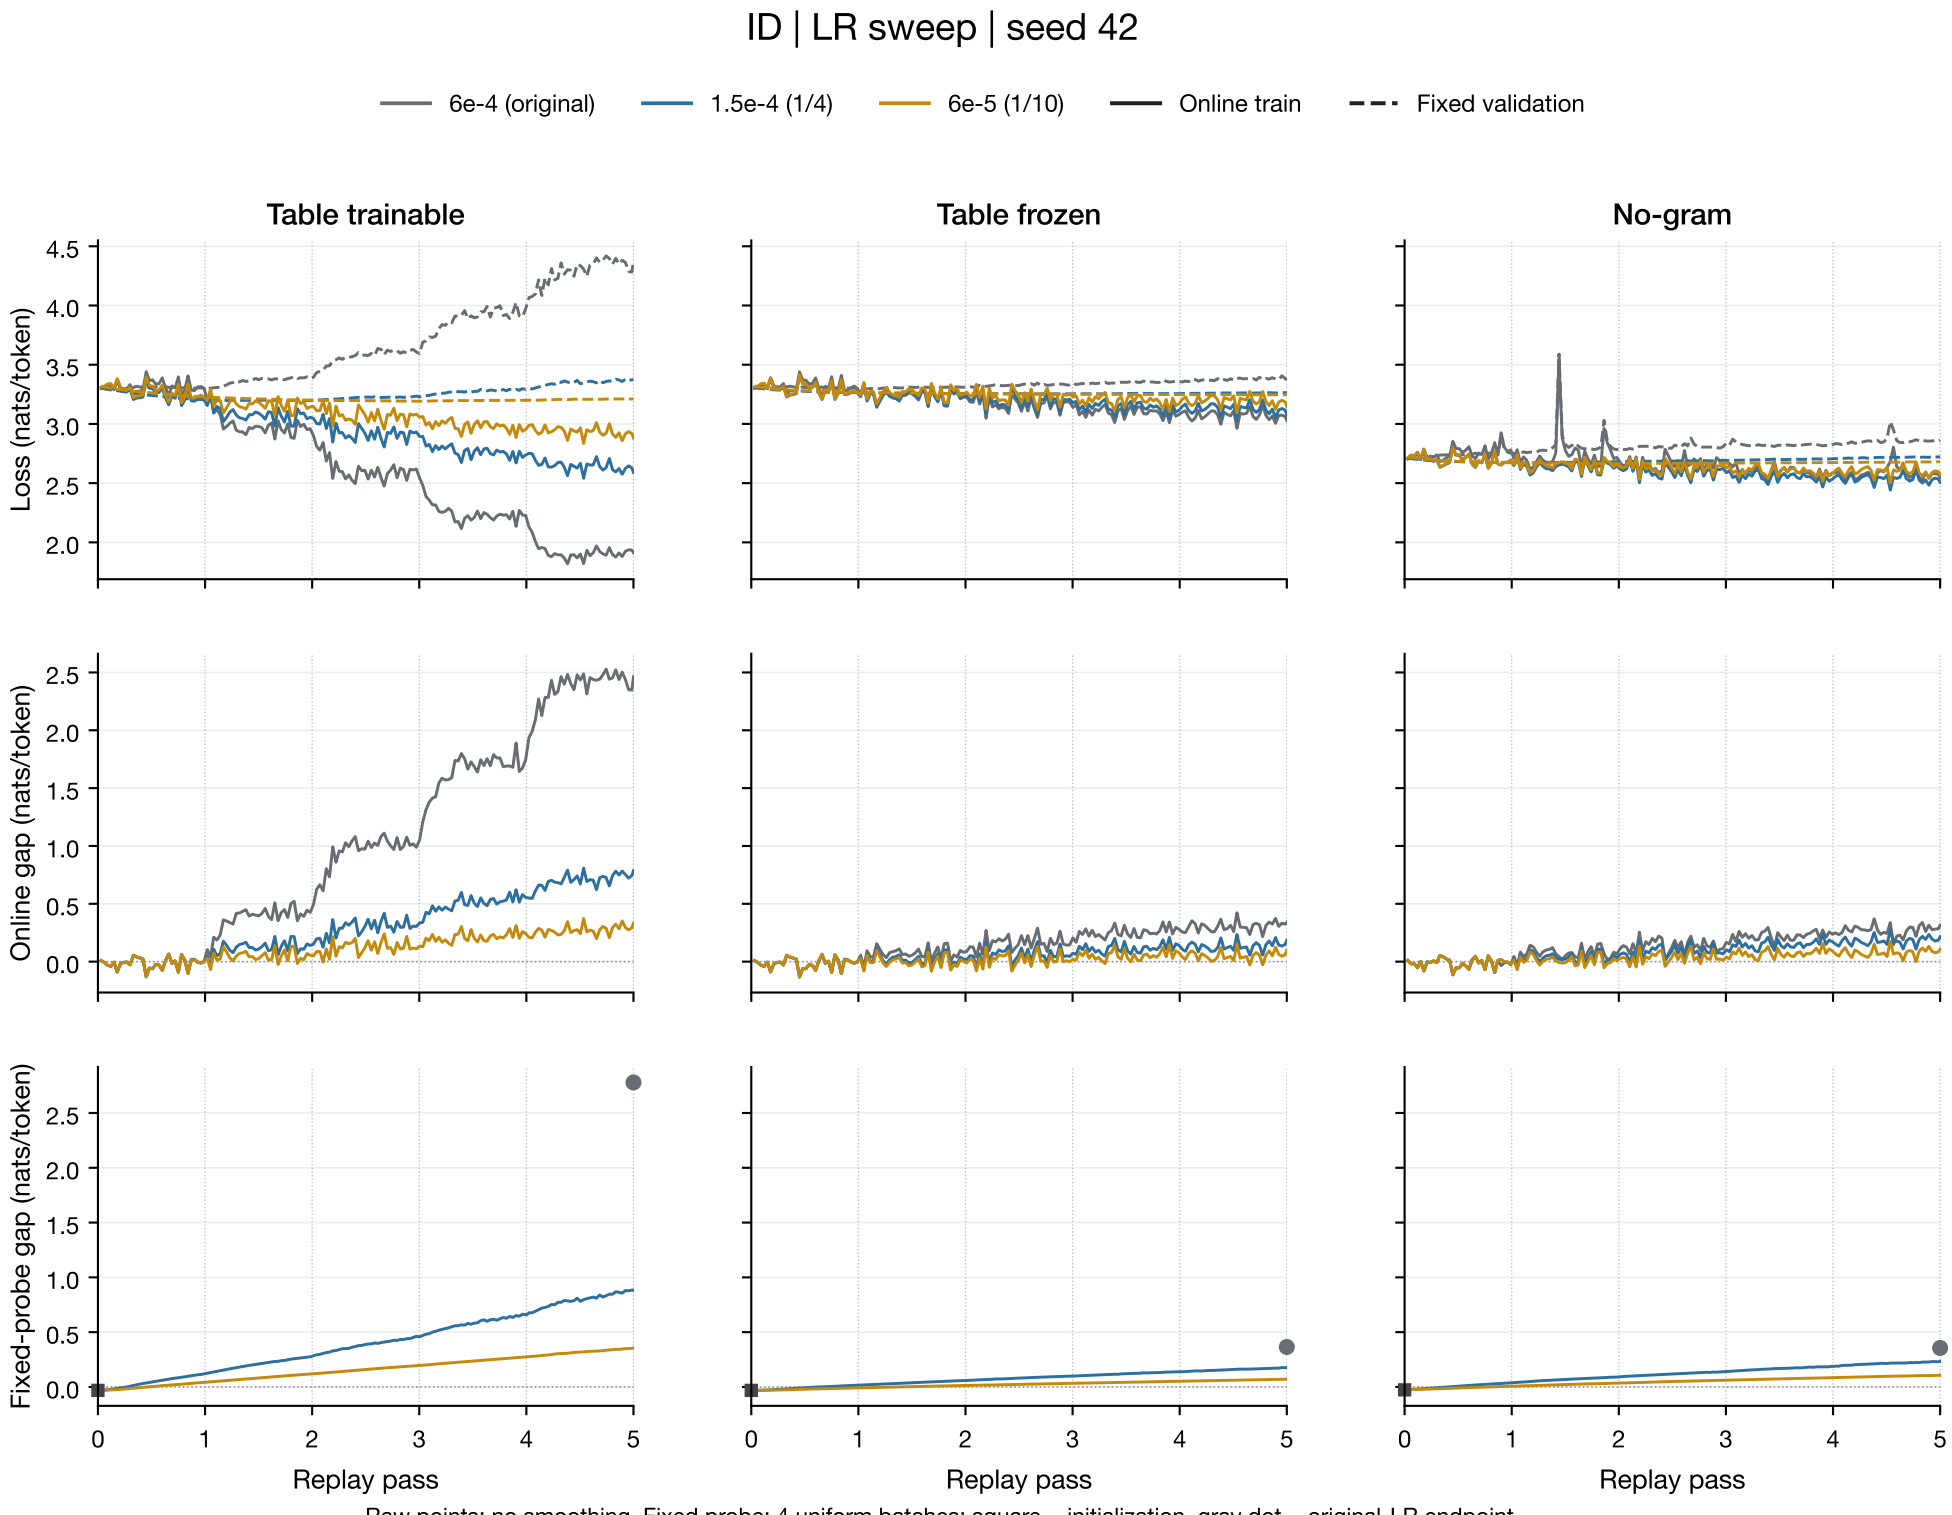
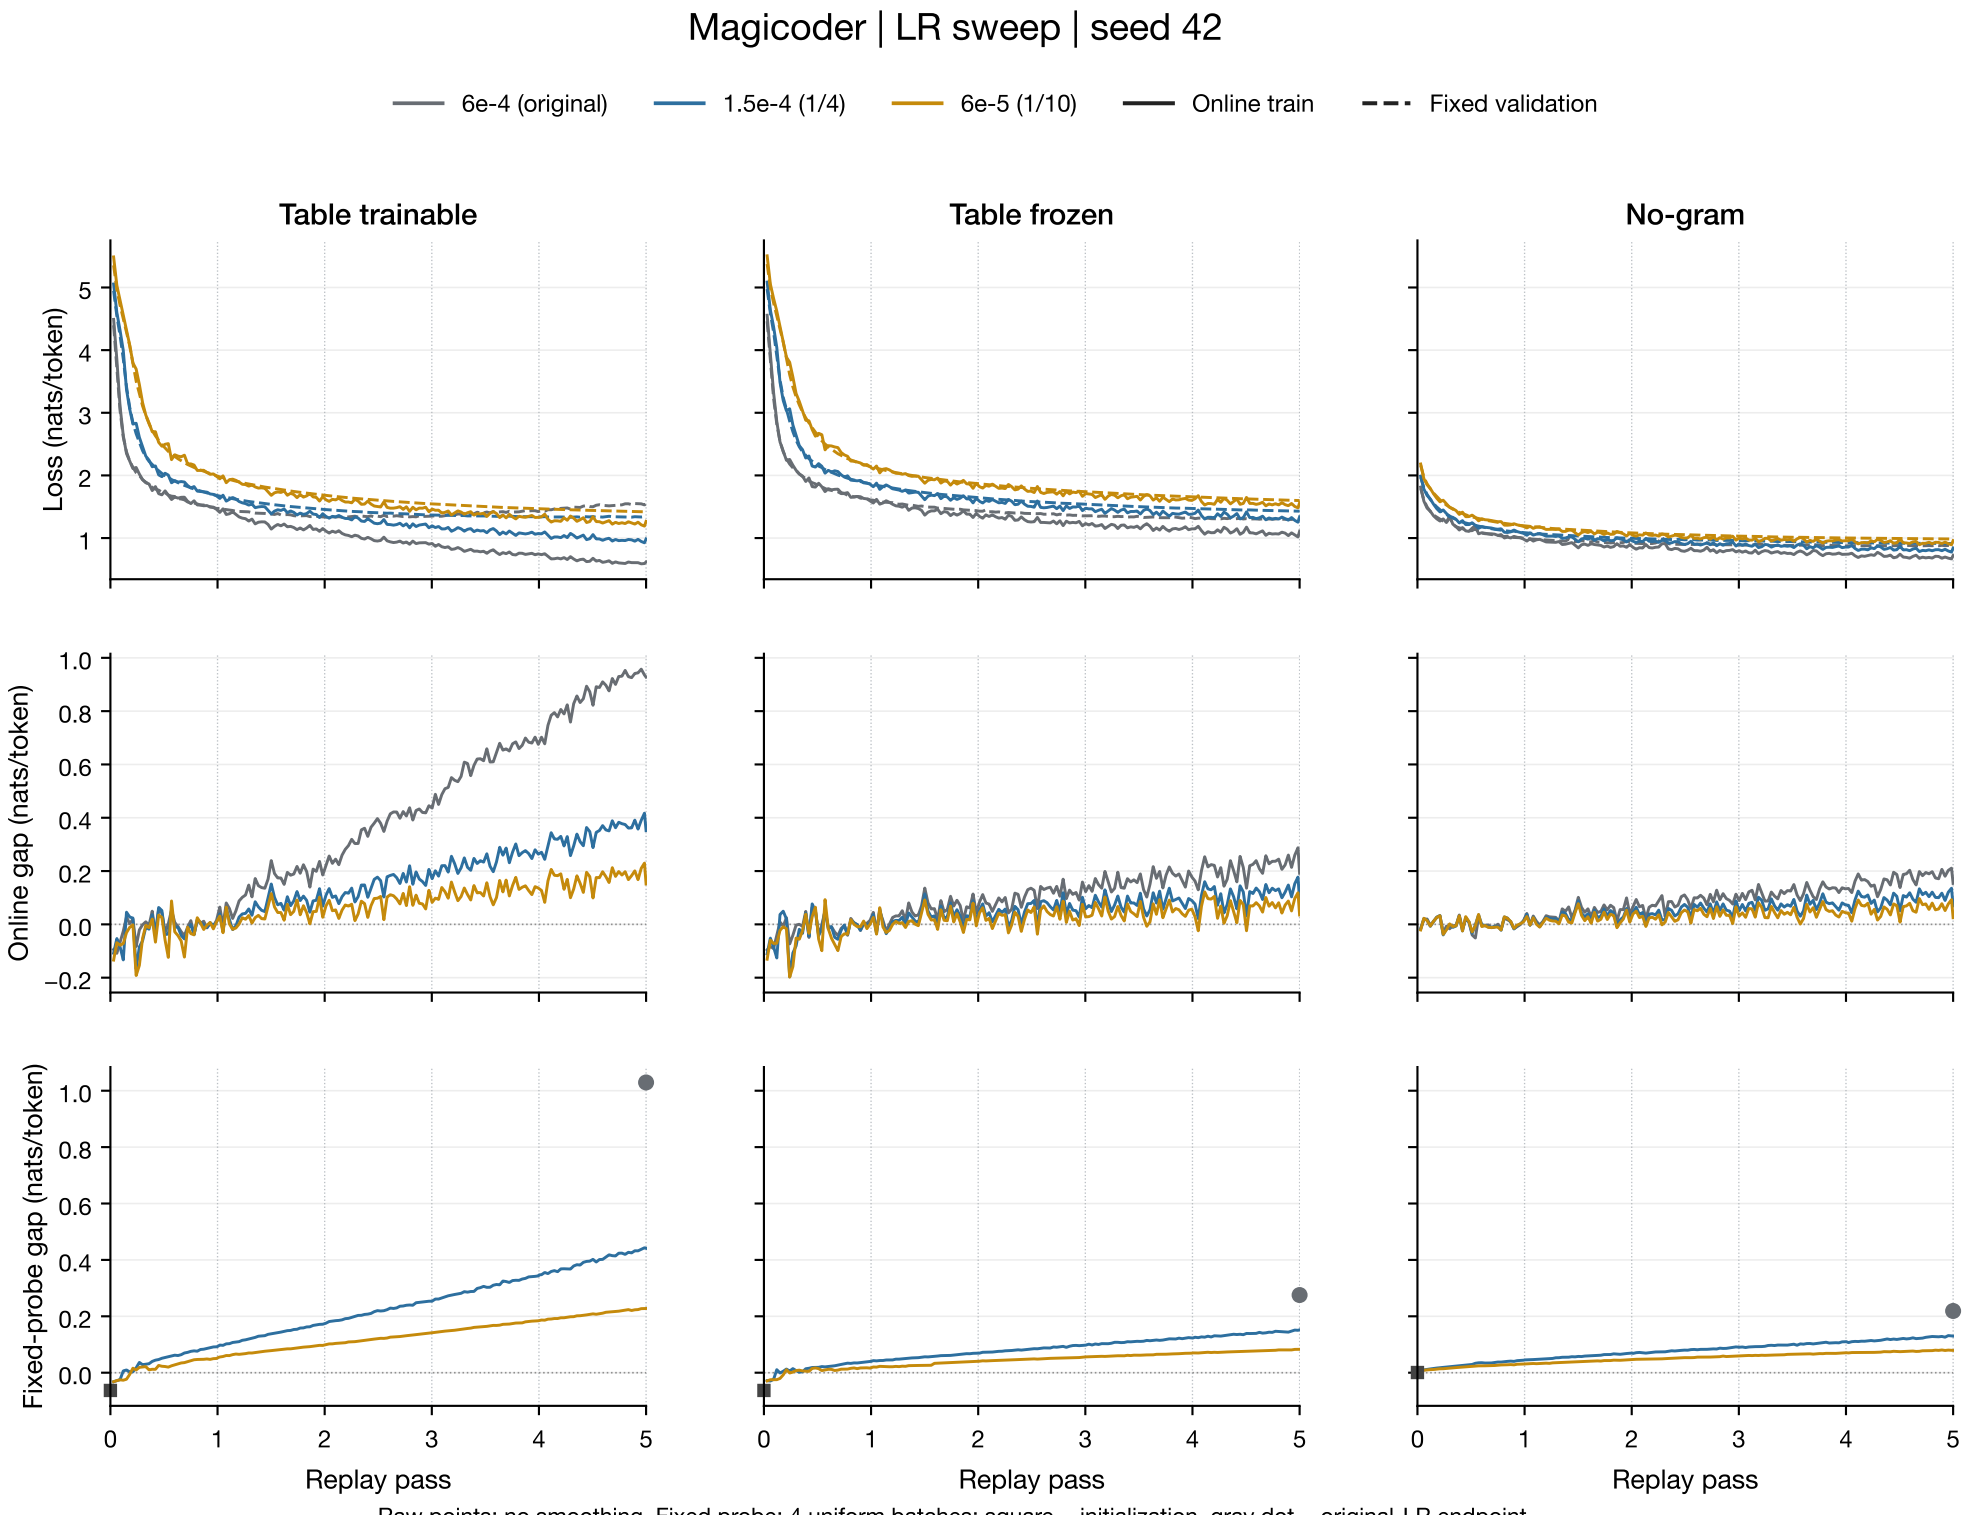
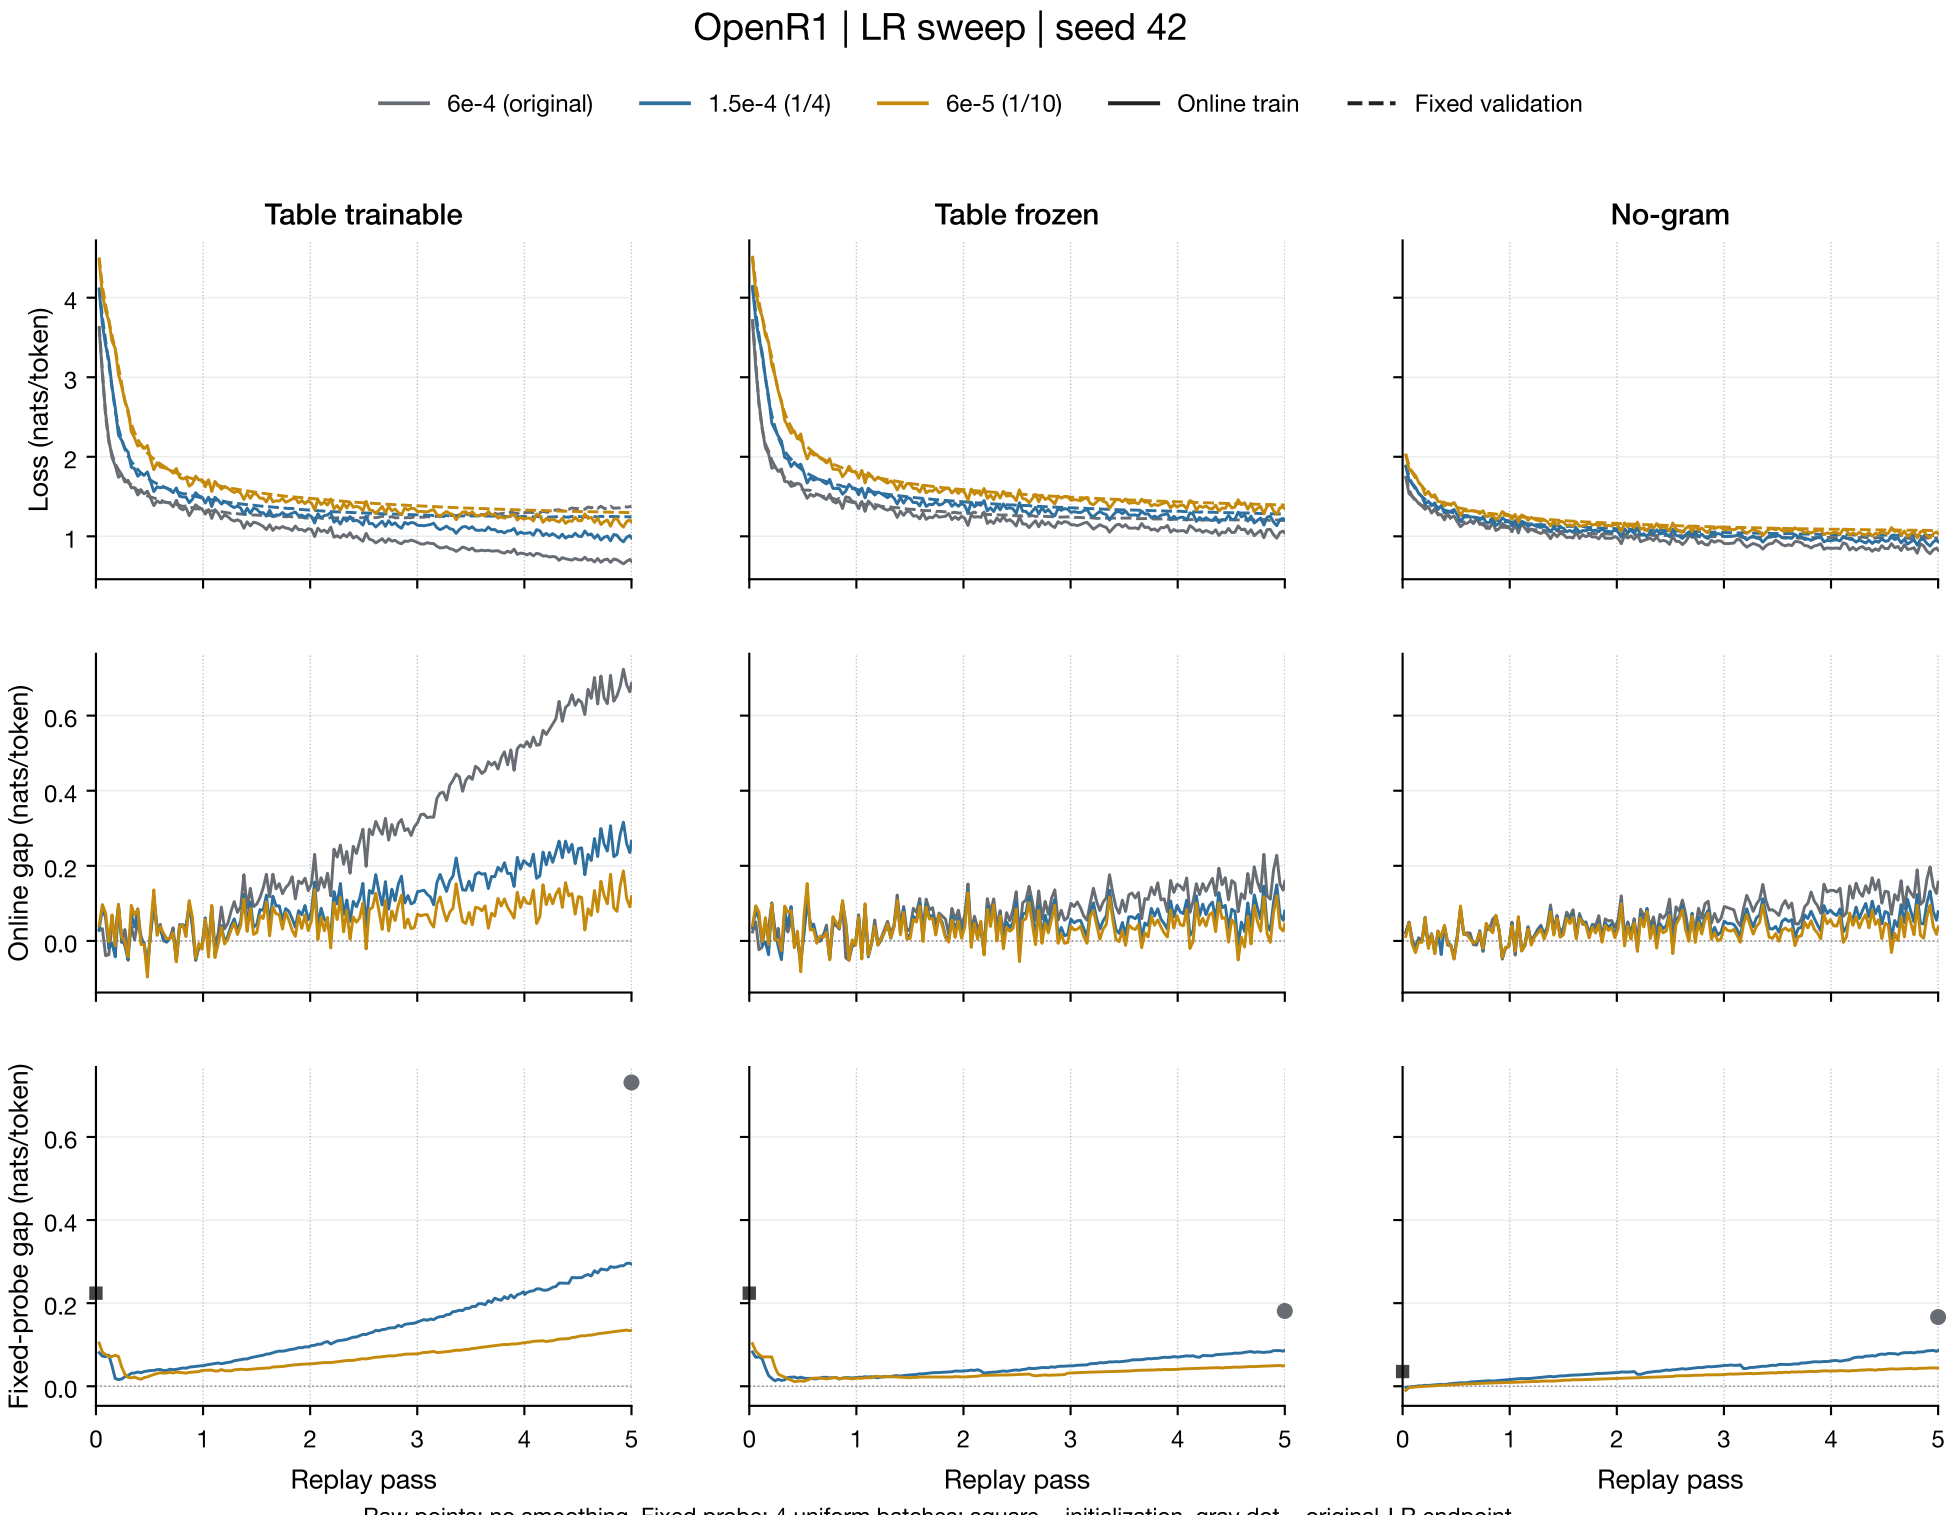
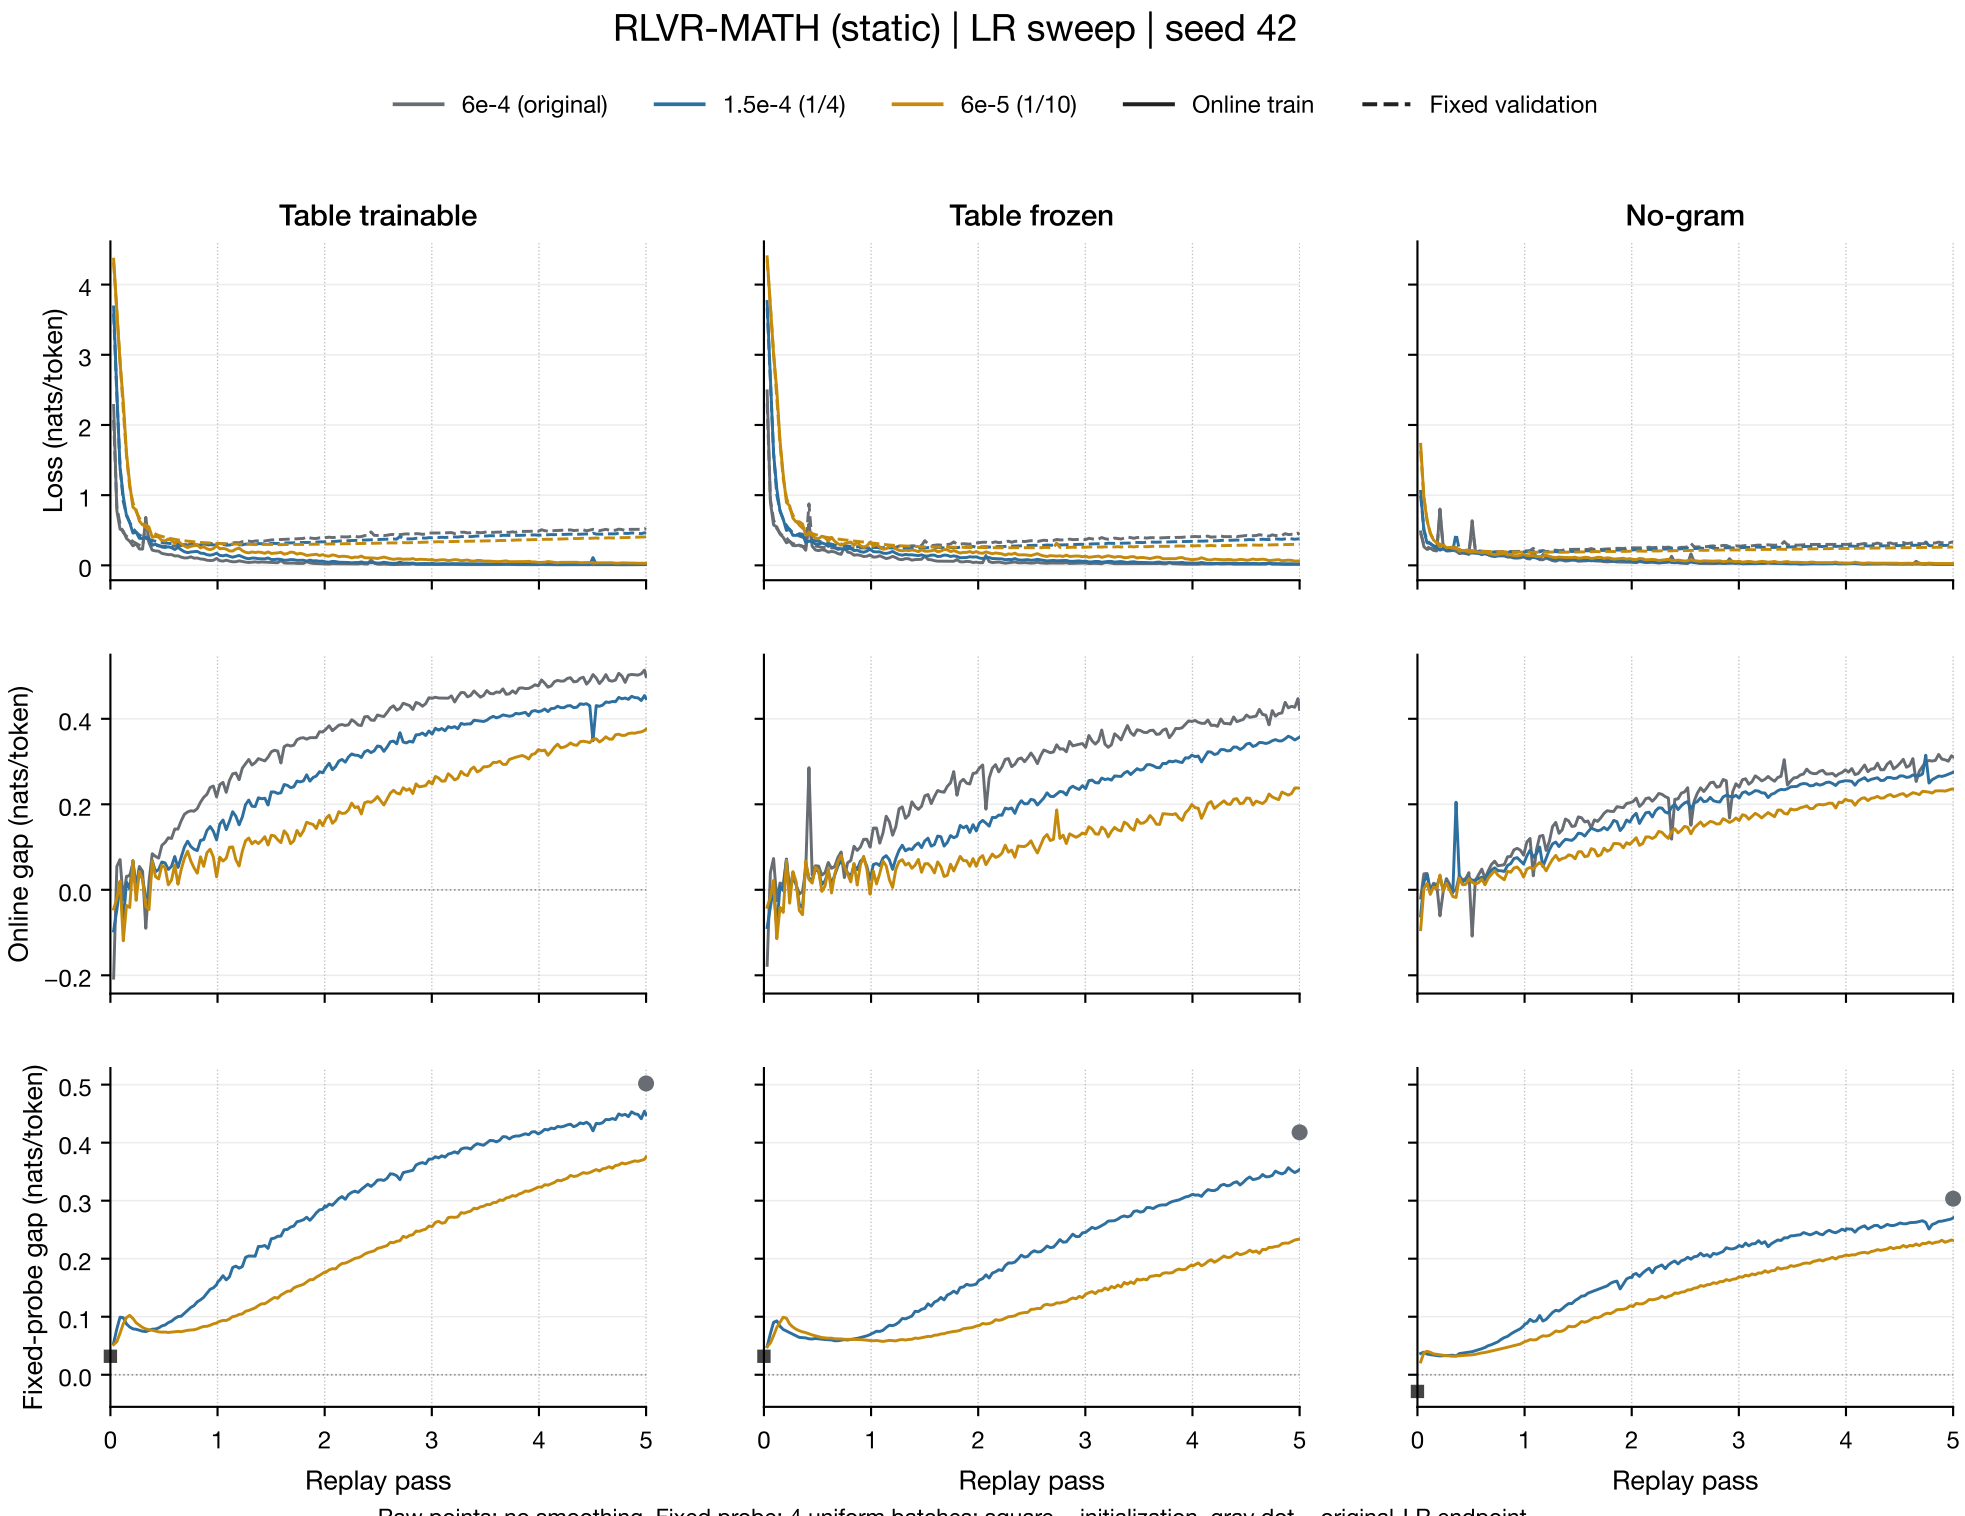

ID | LR sweep | seed 42
6e-4 (original)
1.5e-4 (1/4)
6e-5 (1/10)
Online train
Fixed validation
Table trainable
Table frozen
No-gram
Loss (nats/token)
Online gap (nats/token)
Fixed-probe gap (nats/token)
Replay pass
Raw points; no smoothing. Fixed probe: 4 uniform batches; square = initialization, gray dot = original-LR endpoint.


Magicoder | LR sweep | seed 42
6e-4 (original)
1.5e-4 (1/4)
6e-5 (1/10)
Online train
Fixed validation
Table trainable
Table frozen
No-gram
Loss (nats/token)
Online gap (nats/token)
Fixed-probe gap (nats/token)
Replay pass
Replay pass
Replay pass
Raw points; no smoothing. Fixed probe: 4 uniform batches; square = initialization, gray dot = original-LR endpoint.


OpenR1 | LR sweep | seed 42
6e-4 (original)
1.5e-4 (1/4)
6e-5 (1/10)
Online train
Fixed validation
Table trainable
Table frozen
No-gram
Loss (nats/token)
Online gap (nats/token)
Fixed-probe gap (nats/token)
Replay pass
Raw points; no smoothing. Fixed probe: 4 uniform batches; square = initialization, gray dot = original-LR endpoint.


RLVR-MATH (static) | LR sweep | seed 42
6e-4 (original)
1.5e-4 (1/4)
6e-5 (1/10)
Online train
Fixed validation
Table trainable
Table frozen
No-gram
Loss (nats/token)
Online gap (nats/token)
Fixed-probe gap (nats/token)
Replay pass
Raw points; no smoothing. Fixed probe: 4 uniform batches; square = initialization, gray dot = original-LR endpoint.