




Attention family (“transformer” in the paper)

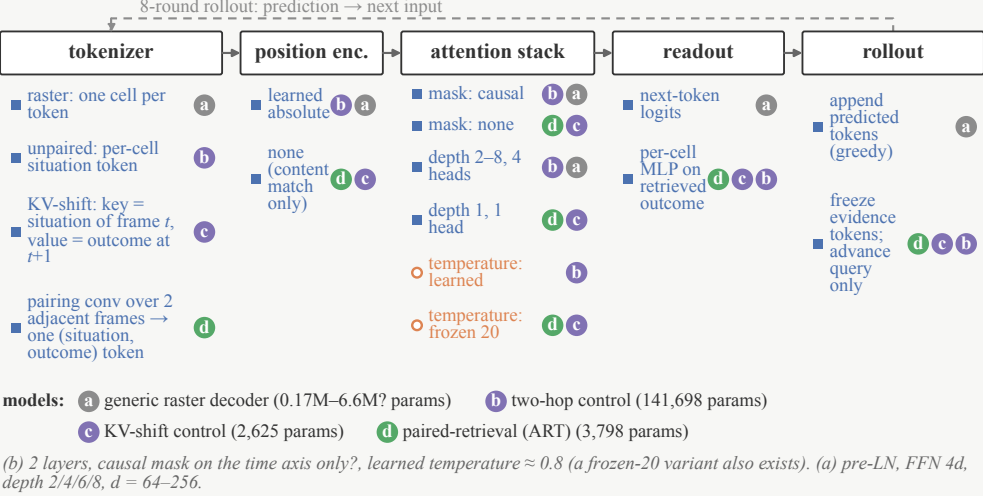

Convolution family

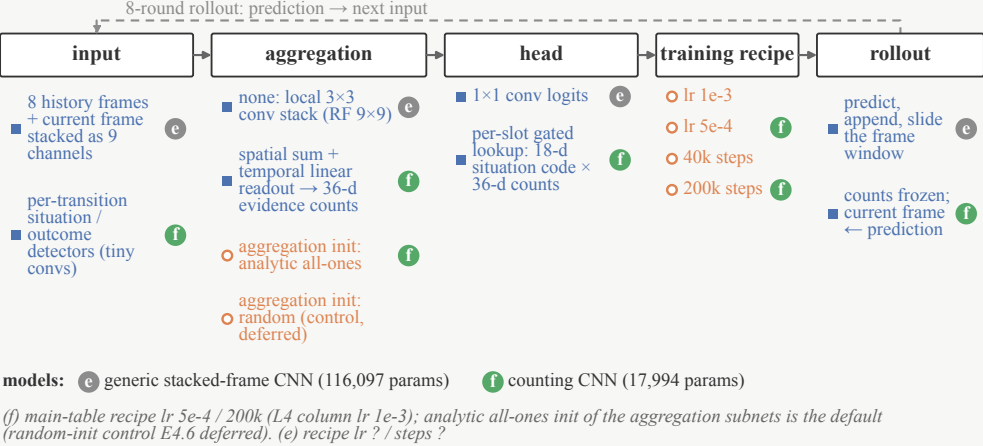

Diffusion family

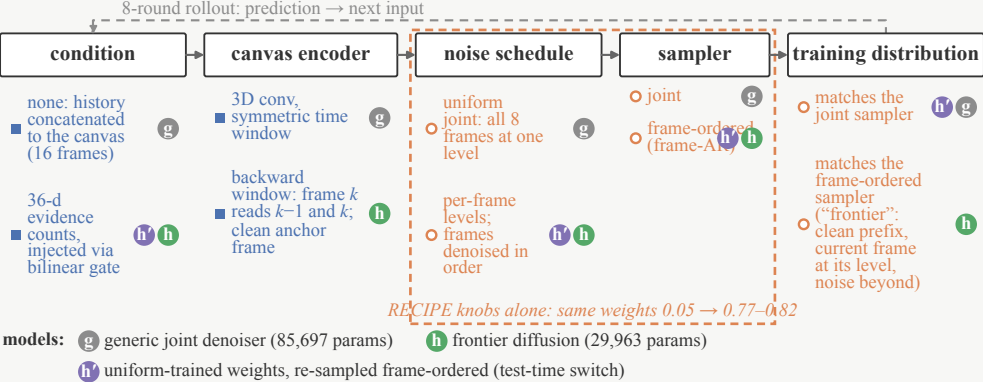

(h') same weights, only the sampler changed at test time: SC SeqAcc 0.05 → 0.77–0.82 (no retraining); its encoder window at that time: symmetric or backward? (g) $4 \times \text{Conv3d } 3 \times 3 \times 3$.

■ STRUCTURE knob (fixed by design) ○ RECIPE knob (training / sampling choice) – ? = not verified in the docs
● generic model ● constructive / retrieval model (main text) ● ladder control / diagnostic
reading a model: follow its letter down the pipeline; each letter marks the knob setting that model takes (blank = not applicable / unknown)