

Ratings Data Analysis Update

Concise summary of current scraping, cleaning, and descriptive analysis results for the ratings dataset.

Repository: [guozhan11/miquan-appium](#)

Executive Summary

3,379	2,956	2,108	7.0
merged rating rows	rows after duplicate handling	usable scripts, overall_rating > 1	median overall rating


The current analysis combines ratings from three scraper outputs, removes duplicate and failed-result rows, and focuses on 2,108 scripts with meaningful overall ratings. Ratings cluster around 7, while popularity variables are highly skewed.

Scraping And Cleaning Pipeline

- Script titles come from two source lists. The original catalog-derived list is represented by `search_terms.csv` with 1,925 titles, mostly scripts published before 2023.
- The 狐小狸 workbook (■■■■■■■■.xlsx) contains 3,297 raw rows and was processed into 2,565 search terms. It includes newly published scripts as well as older scripts.
- The two source lists overlap substantially: 1,532 titles appear in both lists, producing 2,958 unique titles after combining the processed search terms.
- The Appium pipeline collects visible rating fields from logged-in app sessions. iPad is currently the smoother and more stable device path; iPhone scraping is more easily interrupted.
- OpenAI API use is limited to search-query recovery when exact app search fails. The scraper sends the original title, matching rules, and examples, then asks for up to five alternative Chinese search queries in JSON format. The API does not select the final script or extract ratings; the scraper still searches the app and applies title matching before opening a result.
- Rows with `overall_rating == 0` or `overall_rating == 1` were excluded from the main analysis because they appear to be missing or failed-result rows.

Rating source file	Rows
miquan_ipad_ratings.csv	1,657
huxiaoli_ipad_ratings.csv	1,316
miquan_ratings.csv	406

Overall Rating And Popularity

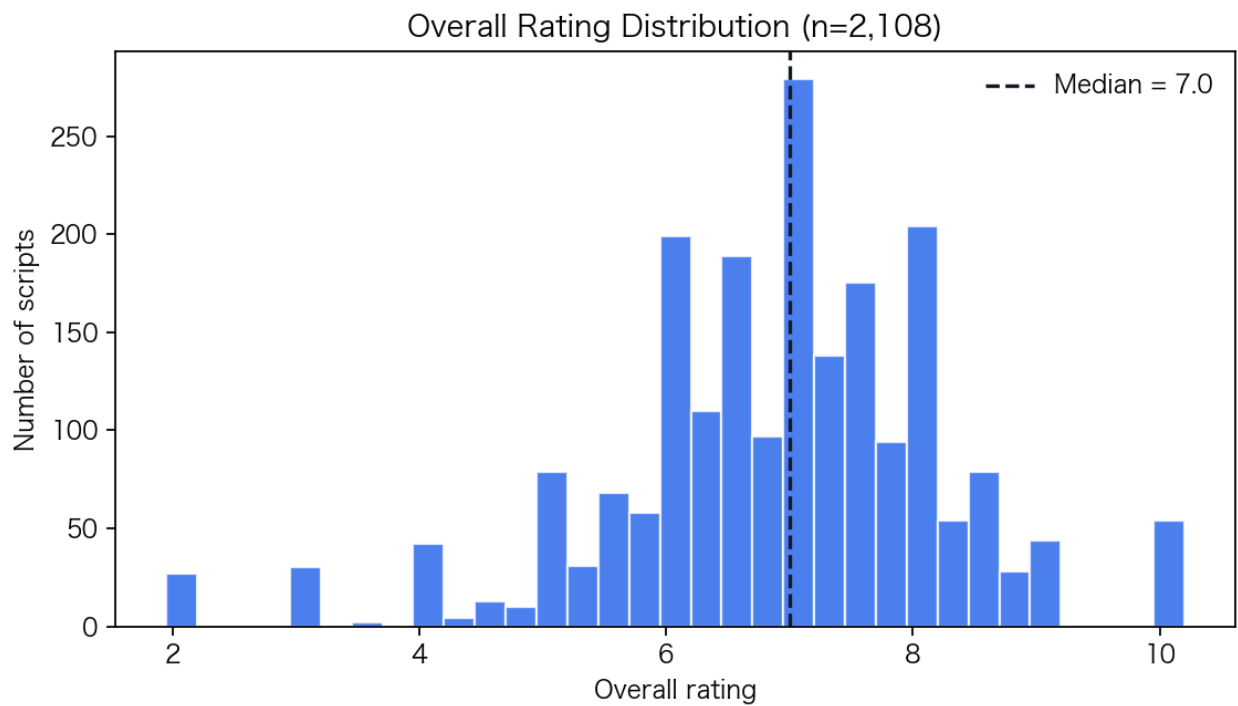


Overall ratings cluster around 7.0, with most scripts between roughly 6.2 and 7.8.

Measure	Mean	Median	25th pct.	75th pct.	Max
Overall rating	6.91	7.00	6.20	7.80	10.00
Played count	24,109	10,269	2,934	27,007	344,824
Review count	1,507	363	64	1,372	49,388

- Popularity variables are much more skewed than ratings, with a small number of scripts having very high played/review counts.
- want_count remains under review: positive values below 100 and positive fractional values are currently flagged as suspicious for popularity-specific analysis.

Subcategory Distribution

Subcategory fields are not complete for every script. 剧情 is the only broadly covered subcategory; most other subcategory scores are available for a much smaller share of scripts.

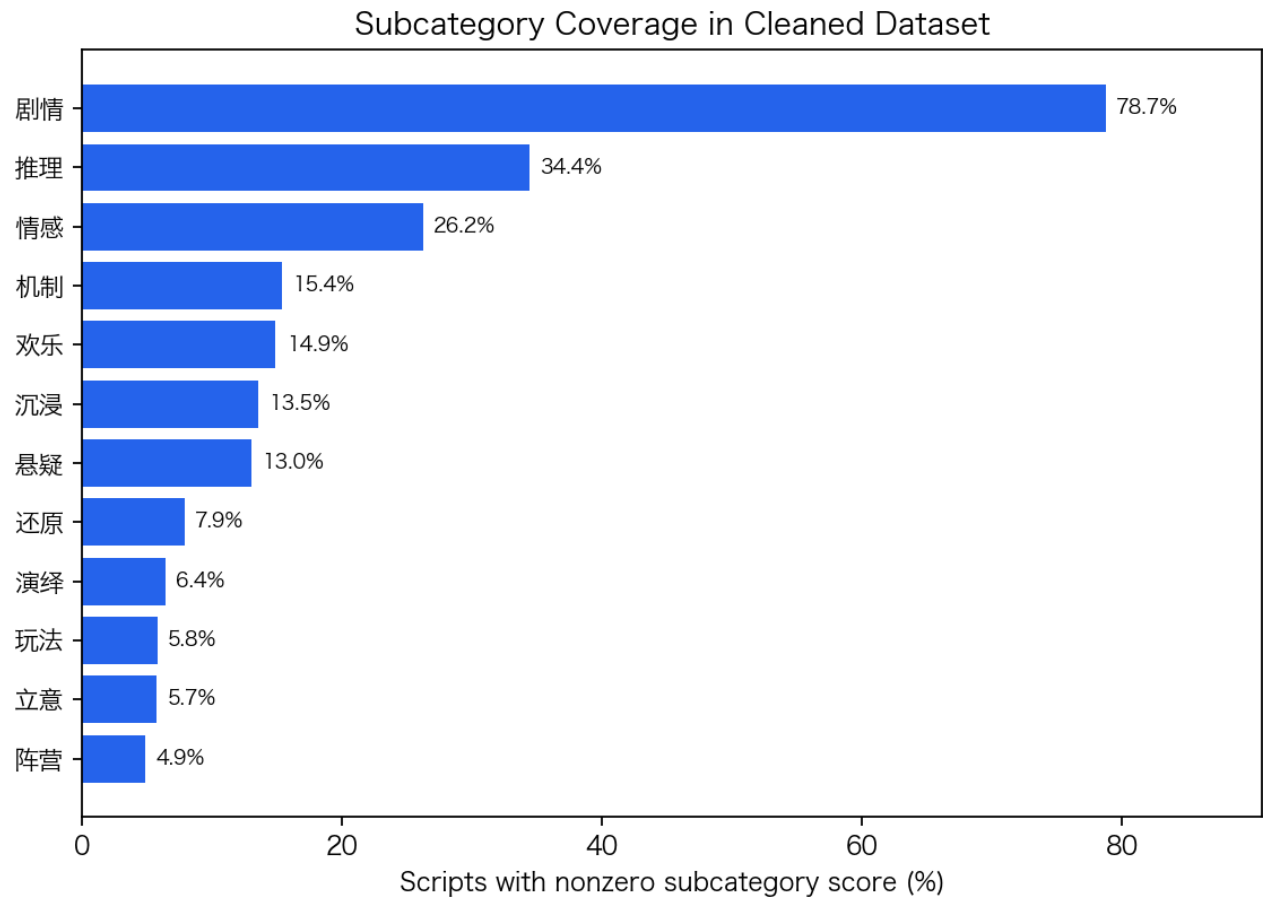


Coverage is concentrated in 剧情, followed by 推理 and 情感.

Subcategory	Nonzero count	Coverage	Mean score
剧情	1,660	78.7%	6.97
推理	725	34.4%	6.84
情感	553	26.2%	7.11
机制	324	15.4%	6.72
欢乐	314	14.9%	6.94
沉浸	285	13.5%	7.18
悬疑	275	13.0%	6.92
演绎	135	6.4%	7.39
玩法	122	5.8%	7.45

Columns with no nonzero values in the current cleaned data: 故事, 难度, 互动, 本格, 变格, 恐怖, 硬核.

Subcategory Correlation With Overall Rating

Active subcategory scores are strongly aligned with overall rating. The strongest correlations are concentrated in story and experience dimensions.

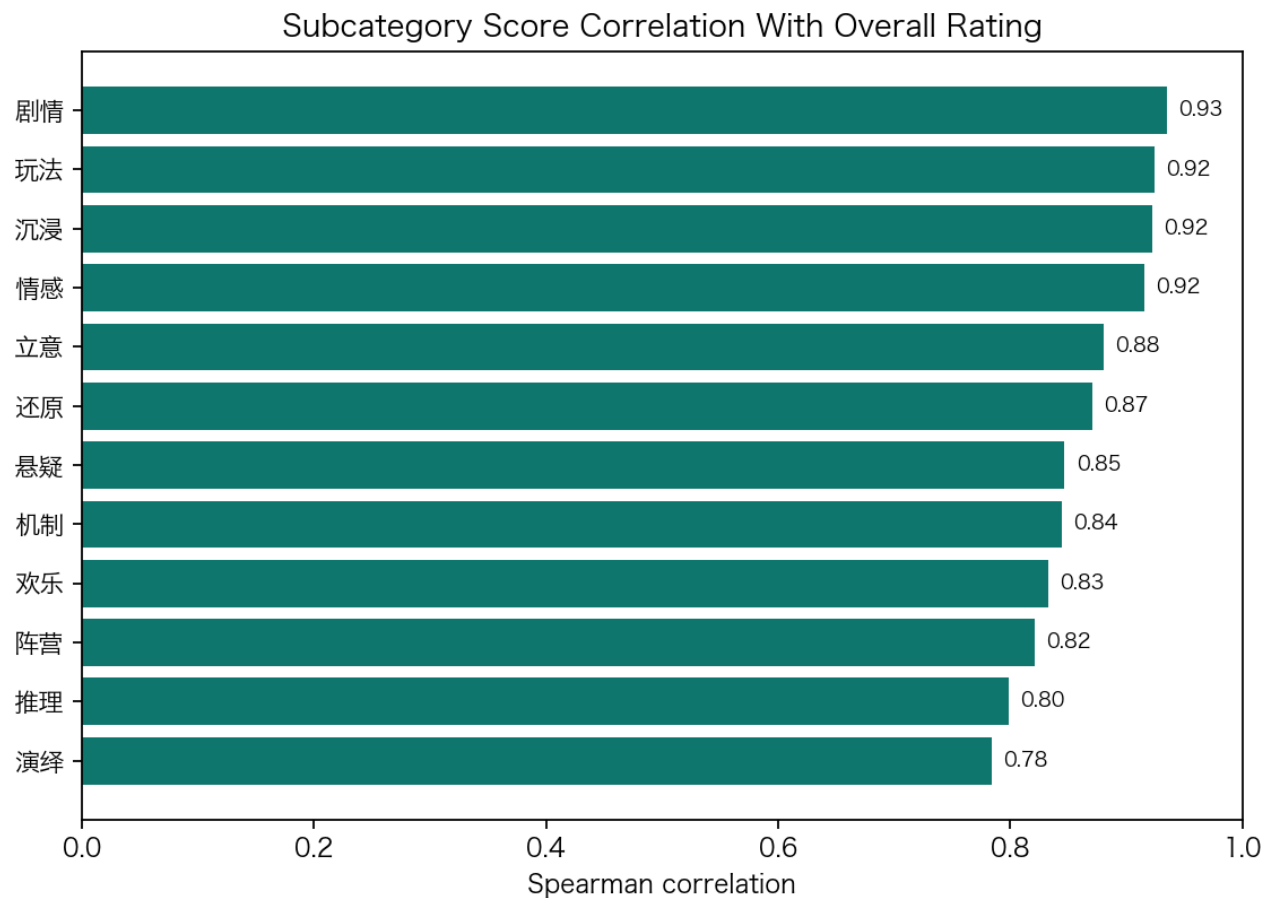


All active subcategories are positively associated with overall rating; 剧情, 玩法, 沉浸, and 情感 are especially aligned.

Subcategory	Nonzero count	Spearman corr. with overall
剧情	1,660	0.935
玩法	122	0.924
沉浸	285	0.922
情感	553	0.915
立意	121	0.880
还原	166	0.870
悬疑	275	0.847
机制	324	0.845
推理	725	0.798

High-rated scripts differ most from below-median scripts on 立意 (+1.66), 演绎 (+1.39), 剧情 (+1.30), 阵营 (+1.29), and 机制 (+1.28).

Subcategory Co-Occurrence Patterns

Most scripts with subcategory data have a limited bundle of dimensions. Exactly three active subcategory ratings appear in 1,440 scripts, or 68.3% of the cleaned dataset.

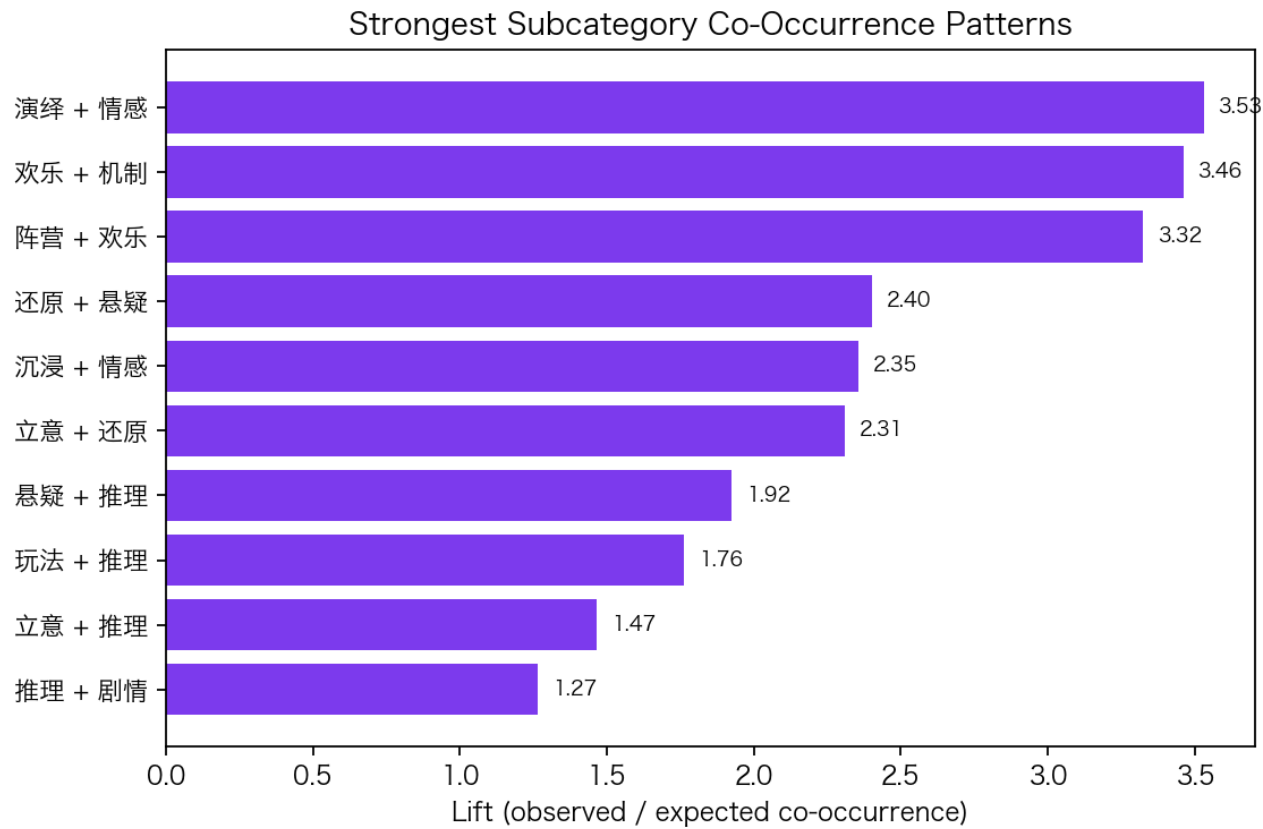


High-lift pairs show recognizable bundles: emotional/performance scripts, mechanism/fun scripts, and mystery/restoration scripts.

Pair	Both count	Support	Lift
情感 + 演绎	125	5.9%	3.53
机制 + 欢乐	167	7.9%	3.46
欢乐 + 阵营	51	2.4%	3.32
悬疑 + 还原	52	2.5%	2.40
情感 + 沉浸	176	8.3%	2.35


Most common bundles: 剧情 + 推理 + 悬疑 (181), 剧情 + 情感 + 沉浸 (175), 剧情 + 机制 + 欢乐 (166), 剧情 + 推理 (156), and 剧情 + 推理 + 情感 (133).

Metadata Parsing: Difficulty And Rating

Metadata parsing was successful for most records: duration 99.4%, total players 97.8%, difficulty 89.8%, and release year 74.2%.

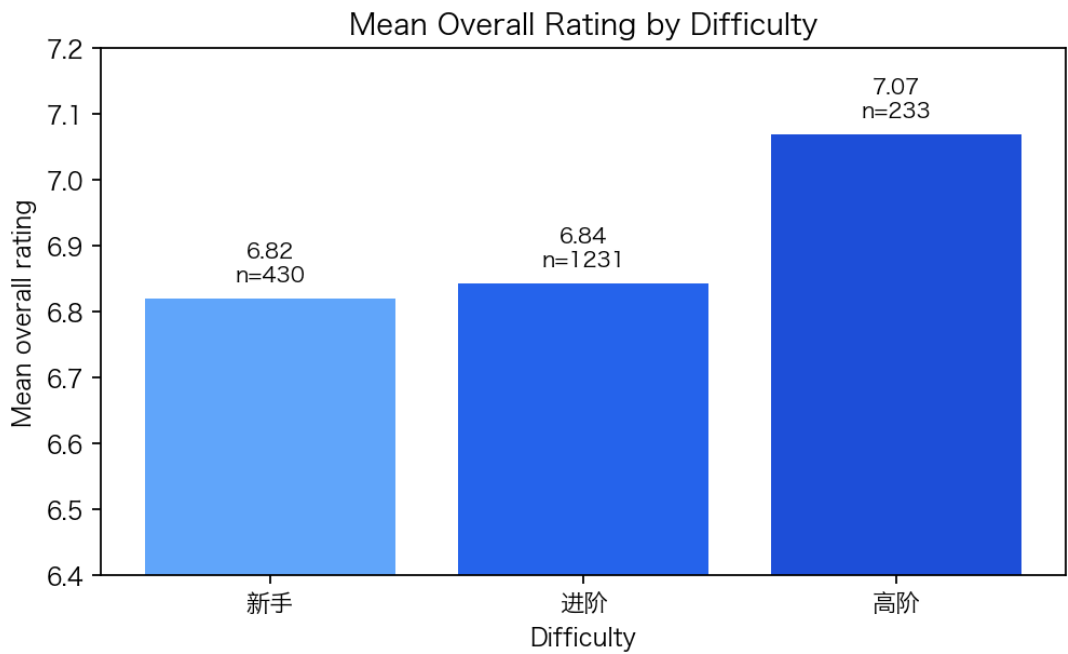

Difficulty differences are modest: 高阶 scripts have the highest mean rating, but the gap is small.

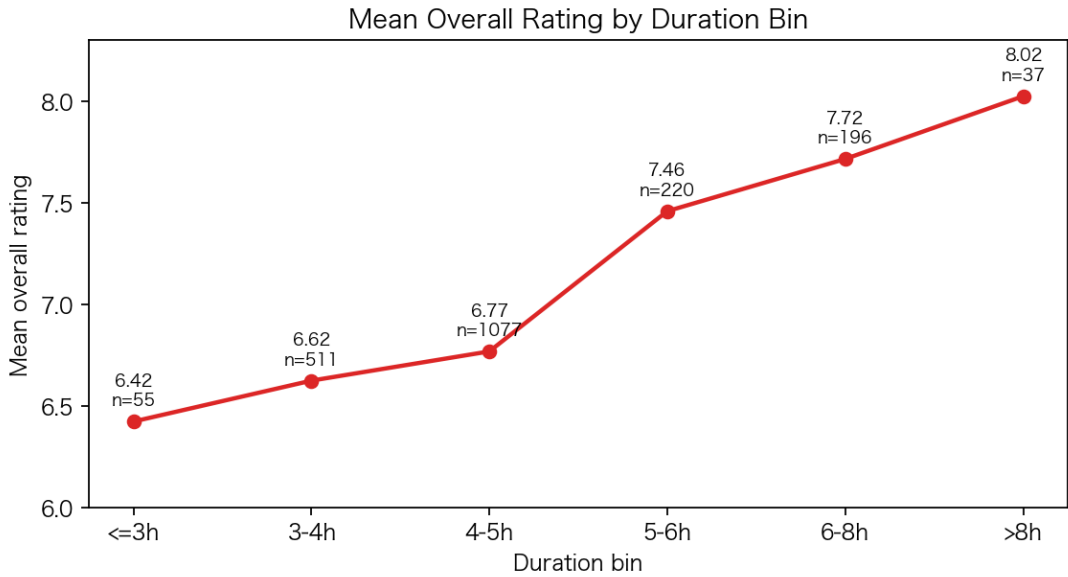

Duration shows a clearer descriptive gradient: longer scripts have higher mean ratings in this sample.

- Difficulty means: 高阶 7.07 (n=233), 进阶 6.84 (n=1,231), 新手 6.82 (n=430).
- Scripts longer than 8 hours average 8.02, while scripts of 3 hours or less average 6.42.
- Newer release years rate higher in this sample, with 2026, 2024, and 2025 at the top; this needs follow-up because release year is likely confounded with platform exposure and availability.

Next Steps

- Finish cleaning `want_count`; current suspicious values are flagged but not fully explained.
- Use LLM-assisted coding to construct script-level authenticity and engagement scores from available descriptions/review text, then model `overall_rating` as the outcome.

Prepared from current notebook outputs and scraper artifacts in the repository.