


Introduction to OpenMP

OpenMP API

- **Directives** and **clauses** to specify the parallelism, synchronization, variable sharing types (private, shared, ...), ...
- **Library functions** for certain functionalities in runtime
 - Modifying number of threads or scheduling policies **in runtime**
 - Getting current number of threads or scheduling policies, etc.
- **Environment variables** to modify code behavior **without recompiling**
 - Number of threads (OMP_NUM_THREADS=??)
 - Scheduling policies (OMP_SCHEDULE=??)
 - To specify during the code execution (e.g., OMP_NUM_THREADS=4 ./exec)


OpenMP execution model

- The programmer adds directives that create **parallel regions** on a code block
 - Multiple threads are created for this code block
 - Each thread executes **the entire code block**, but with a different thread id
 - **Work sharing** should be performed (otherwise same computation would be done redundantly)
 - Thread creation roughly takes 10-20ms.
- At the end of the parallel region, all threads except the master (thread 0) are **destroyed**
- Master thread then continues the sequential execution until the next parallel region or the end of the program
- Data (variables, arrays, ...) belonging to the master thread can be made available to other threads

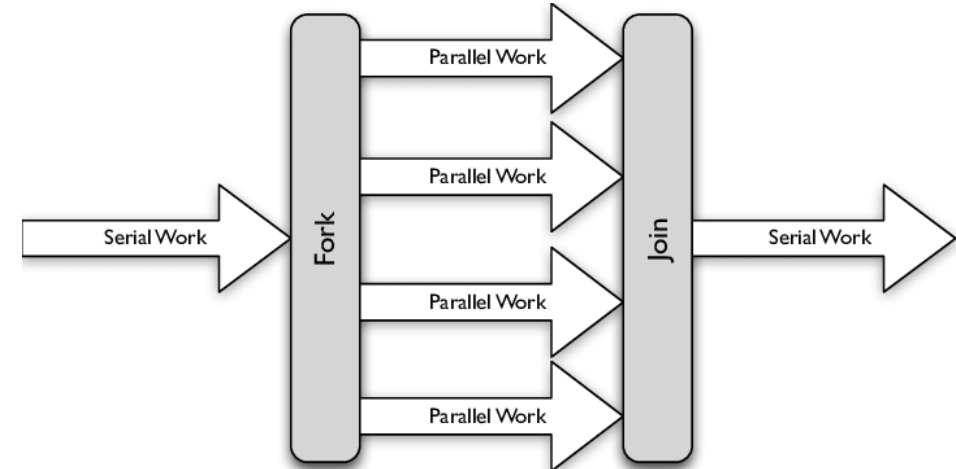

OpenMP memory model

- All threads have access to the same **shared memory space**
 - Variables can be **shared** and **accessed** by all threads
 - Each thread can still have a **private memory and variables**
 - Memory transfers are transparent to the programmer (handled automatically)

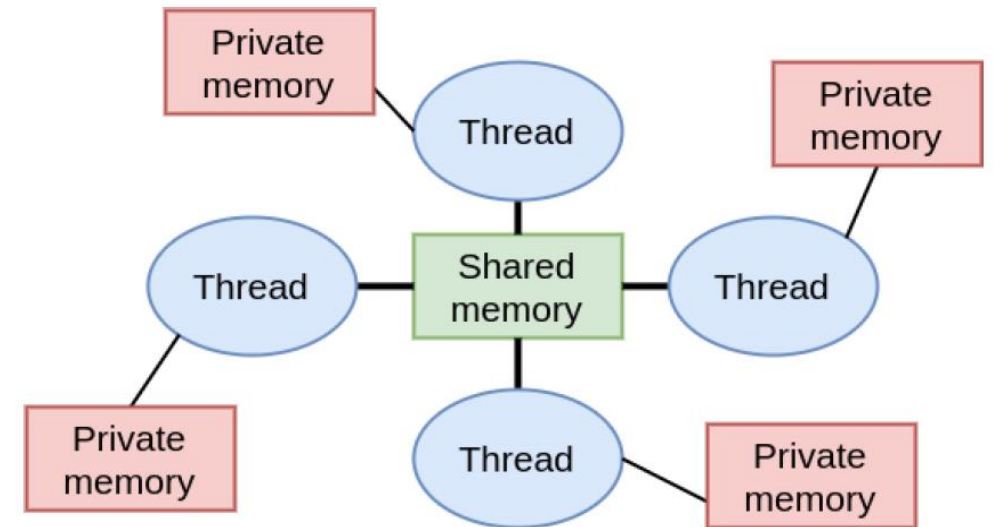

Example: Vector inner product

```
#include <stdio.h>
#define SIZE 256
int main() {
    int i;
    double sum, a[SIZE], b[SIZE];
    // Initialization
    sum = 0.;
    for (i = 0; i < SIZE; i++) {
        a[i] = i * 0.5;
        b[i] = i * 2.0;
    }
    // Computation
    for (i = 0; i < SIZE; i++) { sum = sum + a[i] * b[i]; }
    printf("sum = %lf\n", sum);
    return 0;
}
```

Example: Vector inner product using OpenMP

```
#include <stdio.h>
#include "omp.h"
#define SIZE 256
int main() {
    int i;
    double sum, a[SIZE], b[SIZE];
    // Initialization
    sum = 0.;
    for (i = 0; i < SIZE; i++) {
        a[i] = i * 0.5;
        b[i] = i * 2.0;
    }
    // Computation
    #pragma omp parallel for reduction(+:sum)
    for (i = 0; i < SIZE; i++) { sum = sum + a[i] * b[i]; }
    printf("sum = %g\n", sum);
    return 0;
}
```

OpenMP directives

Thread creation and basic management

OpenMP directives (**#pragma omp *directive***)

- Creating a parallel region (i.e., creating threads)
 - **parallel**
- Sharing work (not re-doing at each thread) **within a parallel region**
 - **for**: sharing the iterations of a loop among threads
 - **sections**: defining code blocks that can be executed independently
 - **single**: defining a code block to be executed by a single thread only
 - **master**: defining a code block to be executed by the master thread
- Synchronization/coordination
 - **critical**: defining a code block to be executed by **one thread at a time**
 - **atomic**: performing atomic instructions (**+=, -=, *=, ...**) on a single variable
 - **barrier**: adding a synchronization point for all threads in a parallel region

omp parallel directive

```
#pragma omp parallel default(none) num_threads(P) [clause1 clause2 ...]
{
    // Parallel code to be executed by each of P threads created
}
```

- Creates a parallel region having P threads (P can be constant/variable)
- Each thread executes the entire code block line by line
- Threads are asynchronous by default (can execute different lines)
- If **num_threads** not specified, following #threads will be used instead:
 - value set by **omp_set_num_threads(P)** function in omp.h
 - value set by **OMP_NUM_THREADS** environment variable
 - #threads supported in the hardware (typically #cores x 2 for a CPU with SMT)

Thread identifier

```
#pragma omp parallel default(none) num_threads(P)
{
    // Parallel code to be executed by each of P threads created
    int thid = omp_get_thread_num();
    int numth = omp_get_num_threads();
}
```

- **omp_get_thread_num()** gives the identifier of a thread
 - Must be called within a parallel region; otherwise it gives 0
 - Must use a **variable private to a thread** to store it
- **omp_get_num_threads()** gives the number of threads available currently
 - Must be called within a parallel region; otherwise it gives 1
 - A **shared variable** might still be OK to store it.
- **thid** and **numth** can be used to differentiate/distribute work among threads

Example: Computing "nine" using three threads

- Three functions (`computeTwo()`, `computeThree()`, `computeFour()`) are given, which take 2, 3, and 4 seconds to terminate, respectively.
- Write an OpenMP program that computes two, three, and four in parallel using multiple threads, then adds them together.

Variable types: **shared**

- Variables defined within the parallel region remain private to each thread and invisible to others
- Private variables are destroyed at the end of a parallel region
- By default, all variables of the master thread (defined before the parallel region) are shared/visible to all threads.
- **default(none)** clause makes these variables invisible, and demands explicit sharing with **shared(varName)** clause
 - Good practice to use this, prevents bugs!

```
int x = 3;                                // x is shared by all threads

#pragma omp parallel num_threads(P)
{
    int y = x + omp_get_thread_num(); // each th has its own
}
```

Variable types: **shared**

- Variables defined within the parallel region remain private to each thread and invisible to others
- Private variables are destroyed at the end of a parallel region
- By default, all variables of the master thread (defined before the parallel region) are shared/visible to all threads.
- **default(none)** clause makes these variables invisible, and demands explicit sharing with **shared(varName)** clause
 - Good practice to use this, prevents bugs!

```
int x = 3;                                // x is not visible to threads

#pragma omp parallel default(none) num_threads(P)
{
    int y = x + omp_get_thread_num(); // each th has its own
}
```

Compilation error! x is undefined

Variable types: **shared**

- Variables defined within the parallel region remain private to each thread and invisible to others
- Private variables are destroyed at the end of a parallel region
- By default, all variables of the master thread (defined before the parallel region) are shared/visible to all threads.
- **default(none)** clause makes these variables invisible, and demands explicit sharing with **shared(varName)** clause
 - Good practice to use this, prevents bugs!

```
int x = 3; // x is visible to threads

#pragma omp parallel default(none) num_threads(P)
shared(x)
{
    int y = x + omp_get_thread_num(); // each th has its own
}
```

x is visible again.

Variable types: **shared**

- Reading a shared variable simultaneously in different threads poses no problem
- Modifying a shared variable can create conflicts called a **race condition**.
 - It requires handling write/write or write/read conflicts.
 - **atomic** or **critical** constructs can be used

```
int x = 3;                                // x is visible to threads

#pragma omp parallel default(none) num_threads(P)
shared(x)
{
    x = x + 1;
}
```

omp atomic

- Calls a hardware instruction for simple operations (+,-,*,min,max,...) that carry out three subinstructions in a single shot
 - load(x)
 - add(x, 1)
 - store(x, add(x, 1))
- Prevents race conditions, but is not cheap
 - Should minimize its use (particularly in a loop)

```
int x = 3;                                // x is visible to threads

#pragma omp parallel default(none) num_threads(P)
shared(x)
{
    #pragma omp atomic
    x = x + 1;
}
```


OpenMP directives

Work-sharing constructs, loop scheduling, barriers

omp sections directive

- Creates independent code blocks or **sections**
- Must be done **within a parallel region**
- Each **section** is a parallel task, and is executed by **only one thread** (instead of each thread)
- Provides static parallelism
- Can have more/less sections than #threads available; task distribution is handled by OpenMP
- **OpenMP Tasks** provide a more flexible framework

```
#pragma omp parallel default(none) num_threads(P)
{
    #pragma omp sections
    {
        #pragma omp section
        {
            f();
        } // end of section
        #pragma omp section
        {
            g();
        } // end of section
        ...
    } // end of sections, implicit barrier for all threads
}
```

omp single/master directive

- **omp single** creates a sequential region within a parallel region; the code block is executed by a single thread (first thread available)
- **omp master** does the same, but the code block is executed by the **master thread** (i.e., thread 0)
- There is an implicit barrier after **omp single**, and no barrier after **omp master**
- Useful for not having to close and reopen a parallel region, avoiding thread creation/destruction overhead

```
#pragma omp parallel default(none) num_threads(P)
{
    #pragma omp single           // executed by 1 thread
    {
        f();
    } // end of single, implicit barrier for all threads
    #pragma omp master          // executed by master thread
    {
        g();
    } // end of master, no barrier, others continue the rest
    #pragma omp single          // executed by 1 thread
    {
        h();
    } // end of single, implicit barrier for all threads
}
```

omp for directive

- **omp for** distributes the domain of iteration of a for loop among threads, instead of repeating the entire loop at each thread.
- Each loop iteration is executed only once by one of threads
- There is an implicit barrier after **omp for**
- Distribution of iteration depends on the **scheduling policy** and **chunk size** of distribution

```
int N = ...;
#pragma omp parallel default(none) num_threads(P)
shared(N)
{
    #pragma omp for
    for (int i = 0; i < N; i++) {
        f(i);
    } // end of for, implicit barrier
}
```

schedule clause for omp for

- Determines how iterations are distributed among threads
- **schedule(policy, chunksize)**
- **static** policy: Assign chunksize (default= $N/\text{num_threads}$) contiguous iterations to each thread in a circular order (0,1,2,3,0,1,2,3,...)
- **dynamic** policy: Assign chunksize (default=1) contiguous iterations to the first available thread (0,3,2,0,1,2,1,3,2,0,...)
- **guided** policy: Start assigning big chunks dynamically, gradually reduce it to chunksize towards the end.
- **runtime** policy: Defer the decision to user in runtime (e.g. using OMP_SCHEDULE variable)

```
int N = ...;
#pragma omp parallel default(none) num_threads(P)
shared(N)
{
    #pragma omp for schedule(dynamic, 32)
    for (int i = 0; i < N; i++) {
        f(i);
    } // end of for, implicit barrier
    #pragma omp for schedule(static)
    for (int i = 0; i < N; i++) {
        g(i);
    } // end of for, implicit barrier
}
```

nowait clause

- Removes the **implicit barrier** at the end of a work sharing construct
 - Enables threads to continue working in the rest of the parallel region
- Can be added at the end of **omp for**, **omp sections**, **omp single**
- Should be added diligently; make sure that there is no dependency on the work sharing construct in the rest of the code

```
int N = ...;
#pragma omp parallel default(none) num_threads(P)
shared(N)
{
    #pragma omp for nowait
    for (int i = 0; i < N; i++) {
        f(i);
    } // end of for, no barrier due to nowait

    // Threads can start the second loop immediately after
    // finishing their chunk for the first loop
    #pragma omp for
    for (int i = 0; i < N; i++) {
        g(i);
    } // end of for, implicit barrier
}
```

if clause

```
#pragma omp parallel num_threads(P) if(cond)
{
    // Parallel code to be executed by each thread
}
```

- **if** clause can be added when creating a parallel region
- Threads are created only if the given **cond** is true/nonzero
 - Otherwise, only the master thread executes the block of code
- Useful for preventing thread creation overhead for small problems
 - Example: **#pragma omp parallel if (N > 128)**