

Unknown Title



 Description

Description

 Note

Note

 Editorial

Editorial

 Solutions

Solutions

 Submissions

Submissions

Code

Code



Testcase

Testcase

Test Result

Test Result



Leet

Leet

×

Medium




Topics



Companies

Given the **head** of a sorted linked list, *delete all nodes that have duplicate numbers, leaving only distinct numbers from the original list*. Return the linked list **sorted** as well.


Example 1:

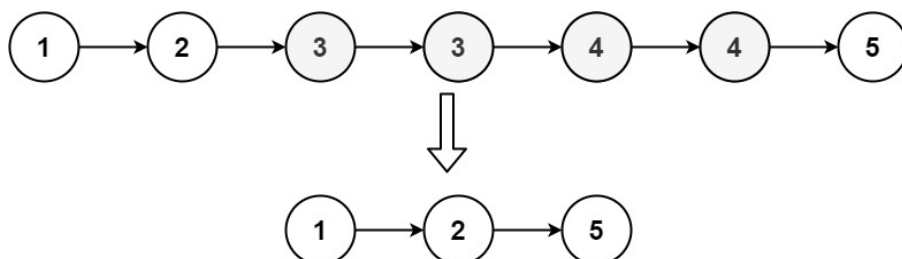

Input: head = [1,2,3,3,4,4,5]

Output: [1,2,5]

Example 2:

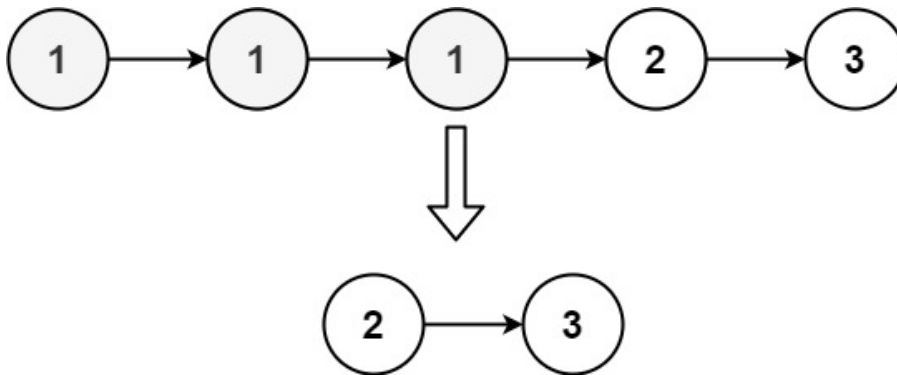


Input: head = [1,1,1,2,3]

Output: [2,3]

Constraints:

- The number of nodes in the list is in the range [0, 300].
- $-100 \leq \text{Node.val} \leq 100$
- The list is guaranteed to be **sorted** in ascending order.

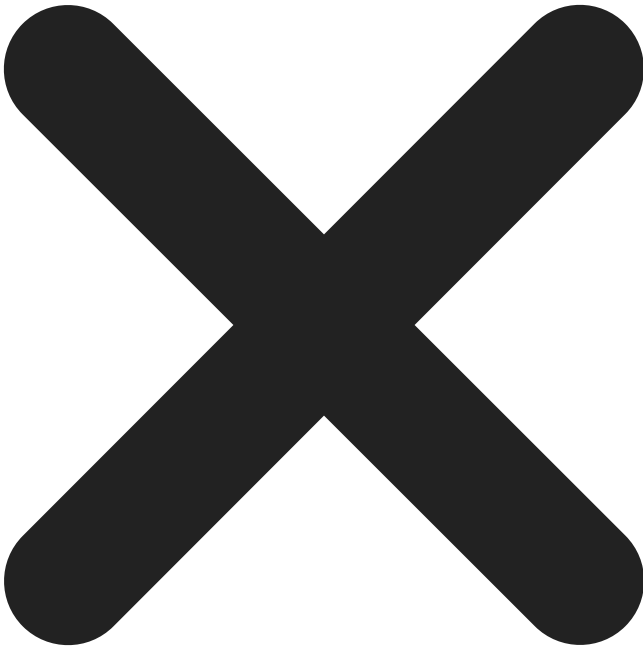

Seen this question in a real interview before?

1/6

Yes

No

Accepted

1,127,031/2.2M

Acceptance Rate

52.0%



Companies



Discussion (147)



</>



Discussion Rules

×

1. Please don't post **any solutions** in this discussion.
2. The problem discussion is for asking questions about the problem or for sharing tips - anything except for solutions.
3. If you'd like to share your solution for feedback and ideas, please head to the solutions tab and post it there.




[Alec](#)



Feb 14, 2023

Am I the only one who stared at this for 5 minutes not understanding the difference between delete dupes 2 and delete dupes 1?

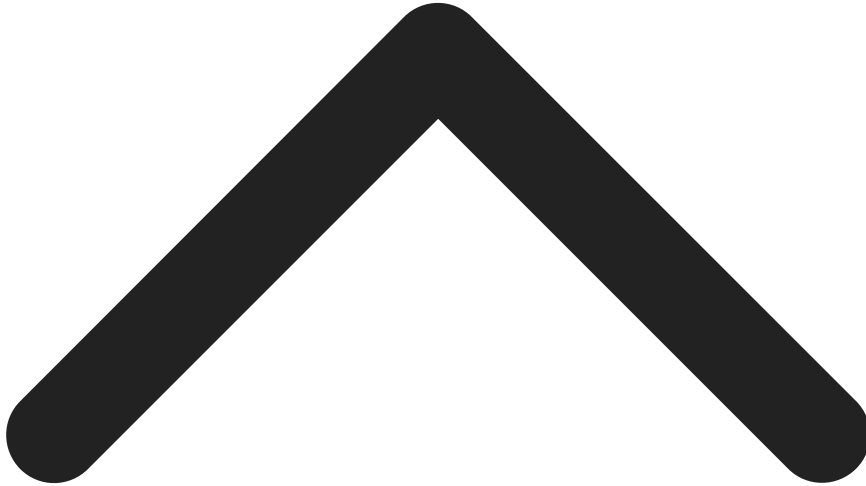

Read more



144



9




[Ramonsan07](#)



Oct 07, 2023

I hate linked list problems and the tons of edge cases you find yourself into when you solve them

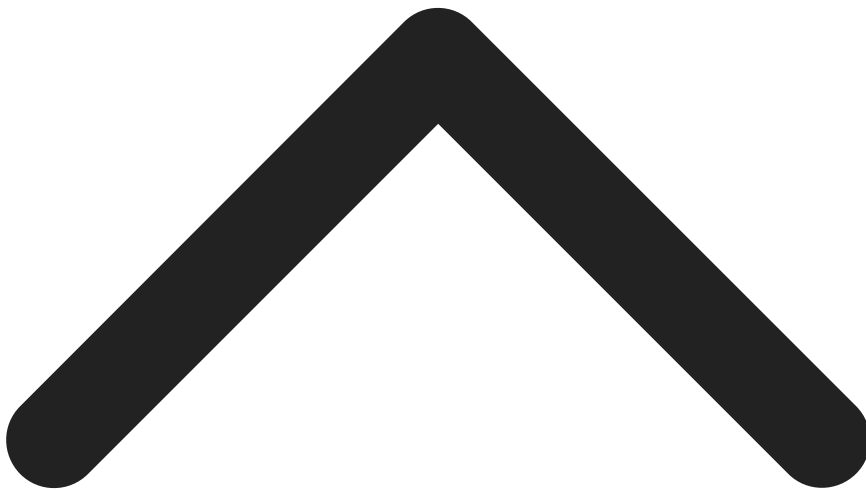

Read more



126



8




[Ajay_787](#)



May 17, 2024

Solved in 20 mins feeling proud, I love LL

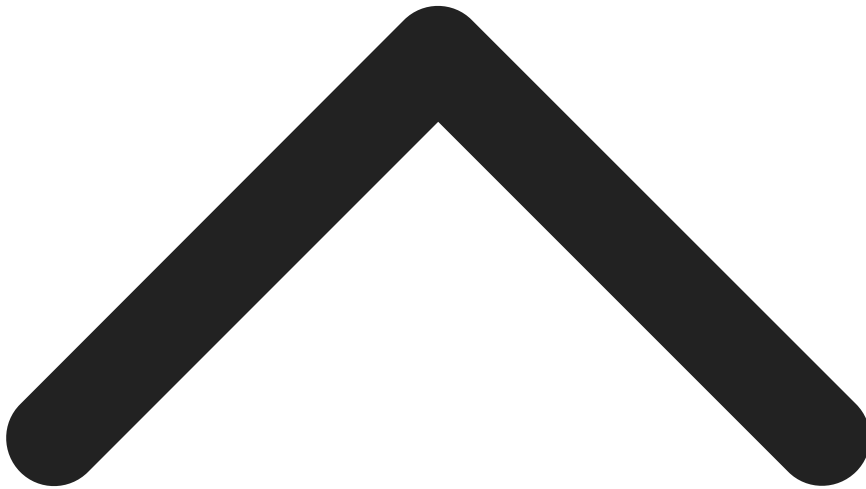

Read more



105



[Bishal Poudel](#)



Mar 13, 2024

*** JUST IN CASE IF YOU WANT HINT ***

- Use two pointers, slow and fast.
- Initialize slow to head and fast to head.next
- Initialize another pointers, preSlow to null, we will need this to eliminate duplicate in between.
- if slow.val != fast.val, keep moving forward and keep tracking preslow while moving forward.
- If slow.val == fast.val, keep moving the fast pointer till we are finding the same value as slow.
- And then set preslow.next to fast. This eliminates the duplicates.
- And then set slow and fast for next iteration, for next iteration, They will be set as, slow=fast and fast=fast.next
- Make sure to handle null cases during the process.

^

Read more

Tip

↑

62

↓

Q

11

↩




[tanula](#)



Aug 02, 2023

description is poorly written. It should have said "find the duplicates and remove them all from the original list".

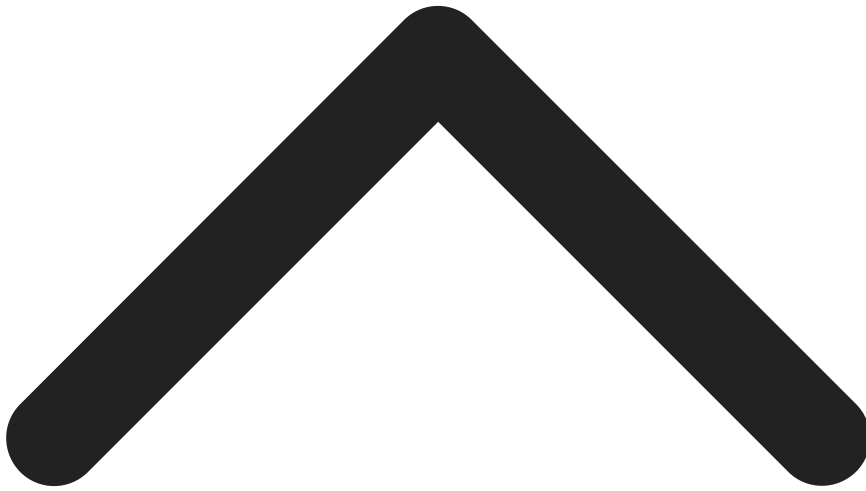

Read more



84




4



[Huzaifa Bin Shahbaz](#)

Nov 26, 2024

Took me almost full day but I did it :(Beats 100% , 81%.
I hate linkedList

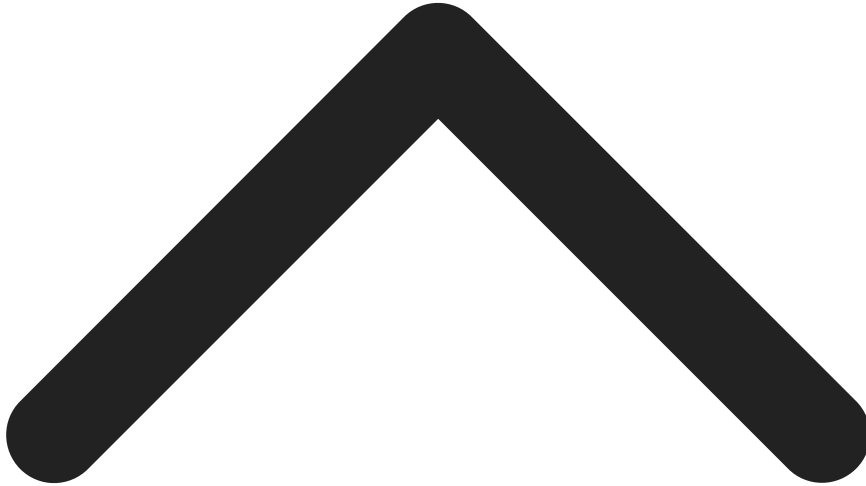

Read more

Feedback



36



2



[vladiora](#)




Apr 18, 2024

Test cases that I found useful:

[]

[1,1]

[1,2,2]

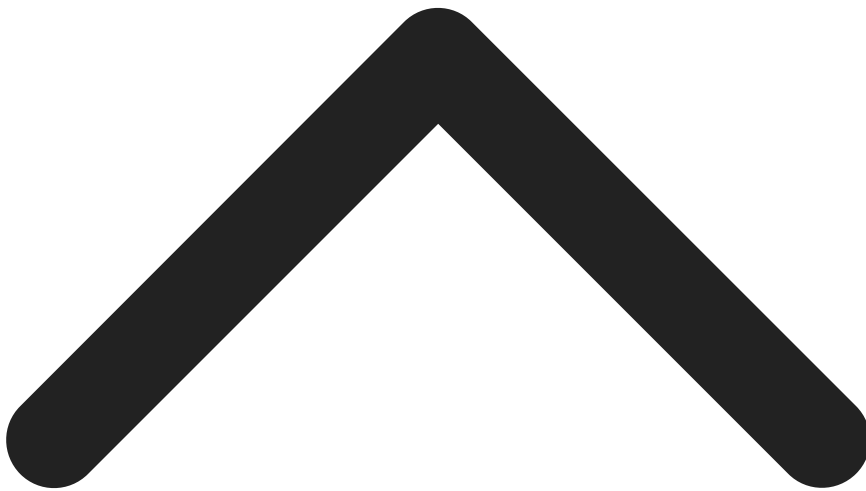

Read more

Tip



33





2



Good test cases:

```
[]  
[-3,-1,0,0,0,3,3]  
[1,1]  
[1,1,2]  
[1,1,2,2]  
[1,1,2,2,3]  
[1,2,3,3,4,4,5]  
[1,1,1,2,3]
```

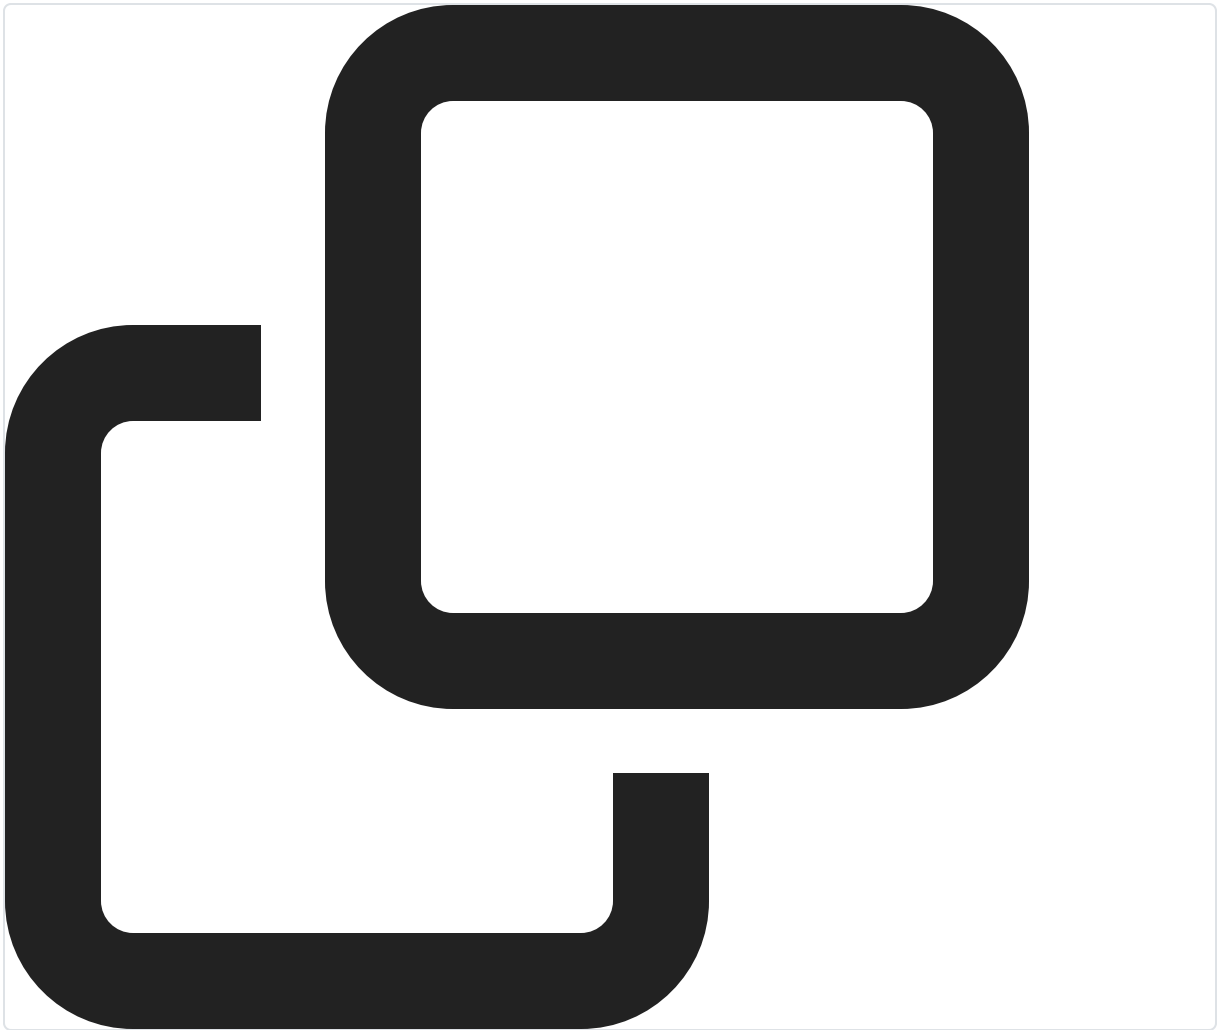

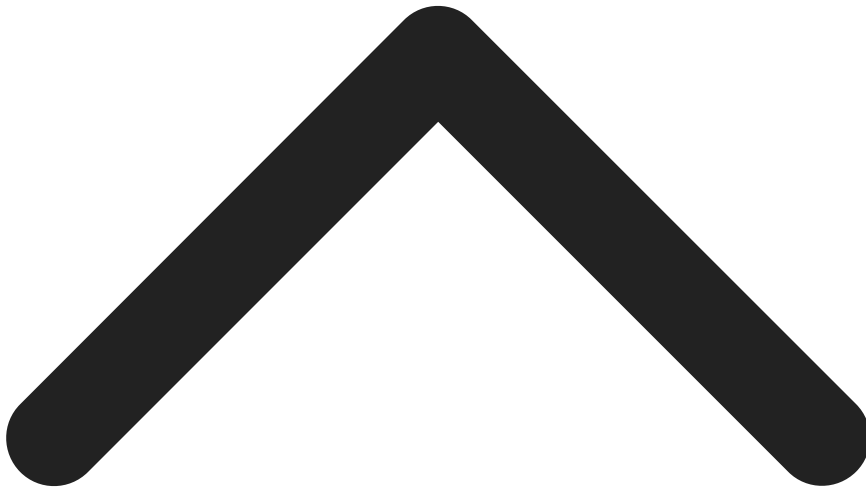

Read more
Tip



18




[Xuan1030](#)



Mar 06, 2025

After grinding some leetcodes, now I'm able to solve a medium on my own quickly :) really proud of myself

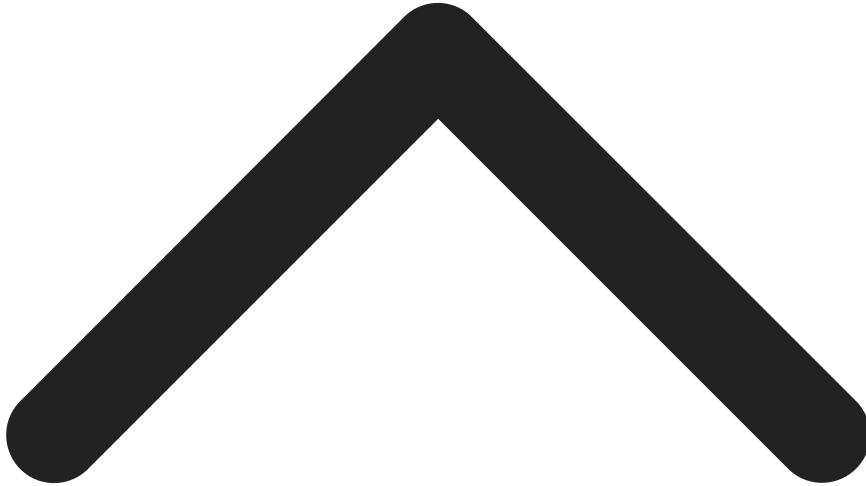

Read more




17



Here my very bad intuition . Please don't cuss me . I am new to linked List. We can use get the length of the Linked list . Then we create another function in which we create another array of size n(which is the size of linked list) and use HashMap to check frequency of the elements in the array . If the frequency of element is 1 . Modify the array . Then in main function . Just add the elements of array in linked list .

I know my solution is very bad but its my first intuition when i saw this question .

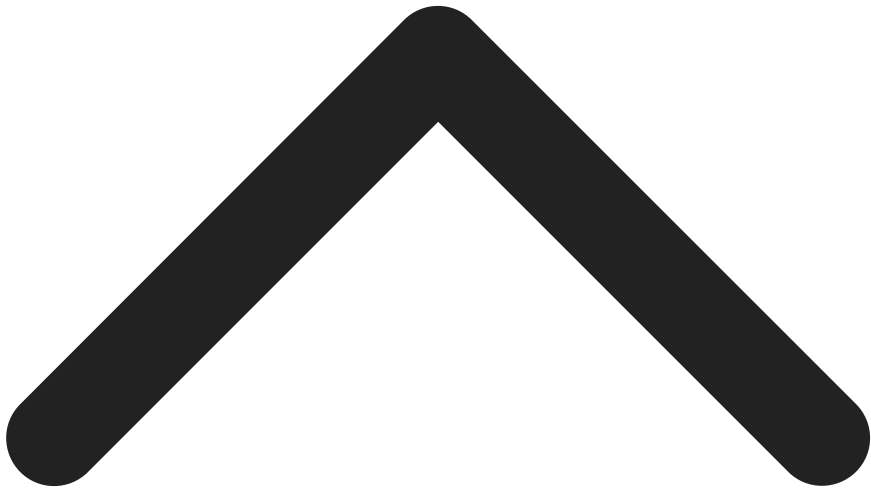

Read more



15



2



Copyright © 2026 LeetCode. All rights reserved.





40 Online

1

2

3

4

5

6

7

8

9

10

/**

* Definition for singly-linked list.

* public class ListNode {

* int val;

* ListNode next;

* ListNode() {}

* ListNode(int val) { this.val = val; }

* ListNode(int val, ListNode next) { this.val = val; this.next =
next; }

* }

*/





Saved

Ln 1, Col 1

You must run your code first



Stuck? Leet guides you through every line.

[Subscribe to Premium](#)

 Qwen

 Qwen3.5-Plus



FindHeaderBarSize

FindTabBarSize

FindBorderBarSize