

Unknown Title



Hard



Topics




Companies

Given the **head** of a linked list, reverse the nodes of the list **k** at a time, and return *the modified list*.

k is a positive integer and is less than or equal to the length of the linked list. If the number of nodes is not a multiple of **k** then left-out nodes, in the end, should remain as it is.

You may not alter the values in the list's nodes, only nodes themselves may be changed.


Example 1:

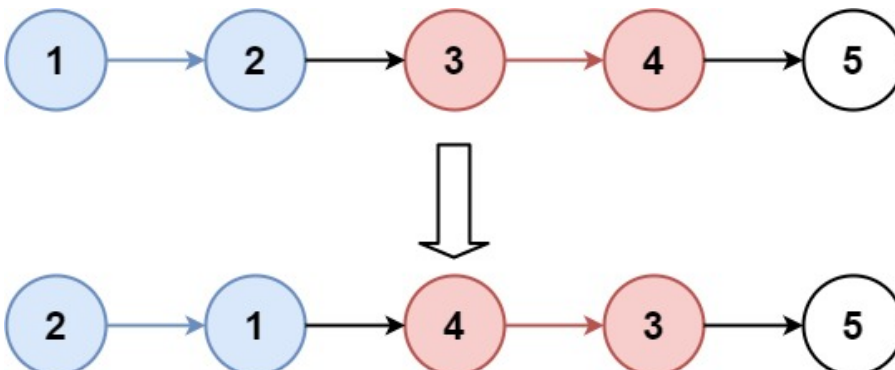

Input: head = [1,2,3,4,5], k = 2

Output: [2,1,4,3,5]

Example 2:

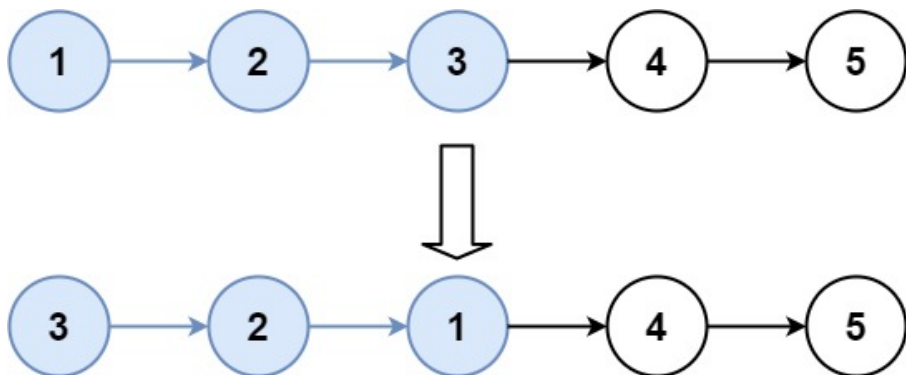


Input: head = [1,2,3,4,5], k = 3

Output: [3,2,1,4,5]

Constraints:

- The number of nodes in the list is n .
- $1 \leq k \leq n \leq 5000$
- $0 \leq \text{Node.val} \leq 1000$

Follow-up: Can you solve the problem in $O(1)$ extra memory space?

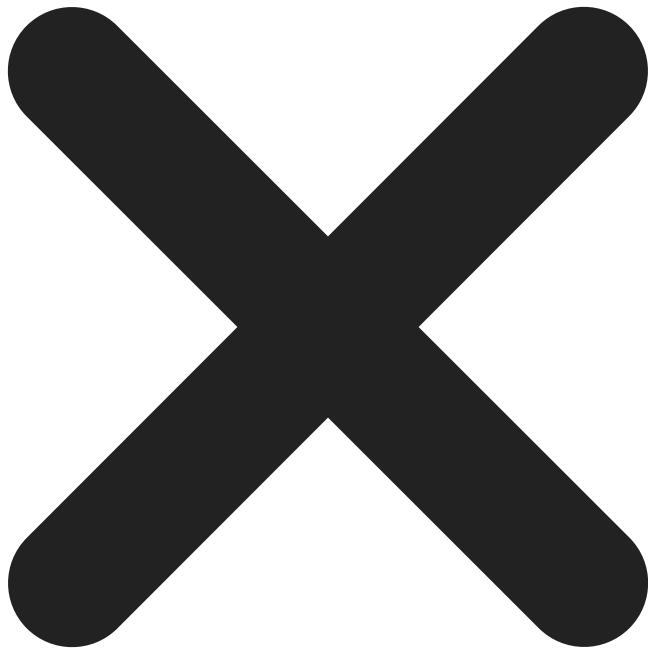

Seen this question in a real interview before?

1/6

Yes

No

Accepted

1,589,793/2.4M

Acceptance Rate

66.4%



Topics



[Linked List](#) [Recursion](#)



Companies



Discussion (358)



</>



Discussion Rules

×

1. Please don't post **any solutions** in this discussion.
2. The problem discussion is for asking questions about the problem or for sharing tips - anything except for solutions.
3. If you'd like to share your solution for feedback and ideas, please head to the solutions tab and post it there.

