

Unknown Title



 Description

Description

 Note

Note

 Editorial

Editorial

 Solutions

Solutions

 Submissions

Submissions

</>

Code

Code



Testcase

Testcase

>_

Test Result

Test Result



Leet

Leet

x

[21. Merge Two Sorted Lists](#)

Easy



Topics





Companies

You are given the heads of two sorted linked lists `list1` and `list2`.

Merge the two lists into one **sorted** list. The list should be made by splicing together the nodes of the first two lists.

Return *the head of the merged linked list*.

Example 1:



Input: list1 = [1,2,4], list2 = [1,3,4]

Output: [1,1,2,3,4,4]

Example 2:

Input: list1 = [], list2 = []

Output: []


Example 3:

Input: list1 = [], list2 = [0]

Output: [0]

Constraints:

- The number of nodes in both lists is in the range [0, 50].
- $-100 \leq \text{Node.val} \leq 100$
- Both list1 and list2 are sorted in **non-decreasing** order.

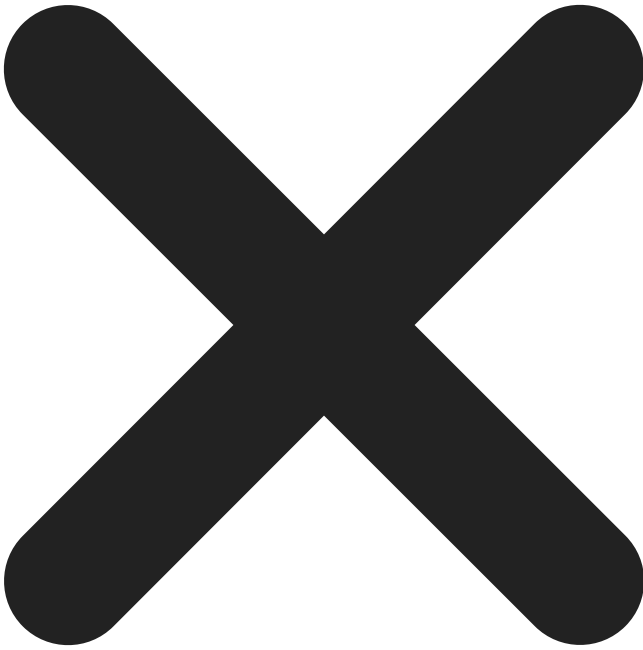

Seen this question in a real interview before?

1/6

Yes

No

Accepted

6,360,482/9.3M

Acceptance Rate

68.4%



Topics



[Linked List](#) [Recursion](#)



Companies



Discussion (607)



</>



Discussion Rules

×

1. Please don't post **any solutions** in this discussion.
2. The problem discussion is for asking questions about the problem or for sharing tips - anything except for solutions.
3. If you'd like to share your solution for feedback and ideas, please head to the solutions tab and post it there.




[Sourabh](#)



Apr 22, 2023

I think this should be a Medium problem.

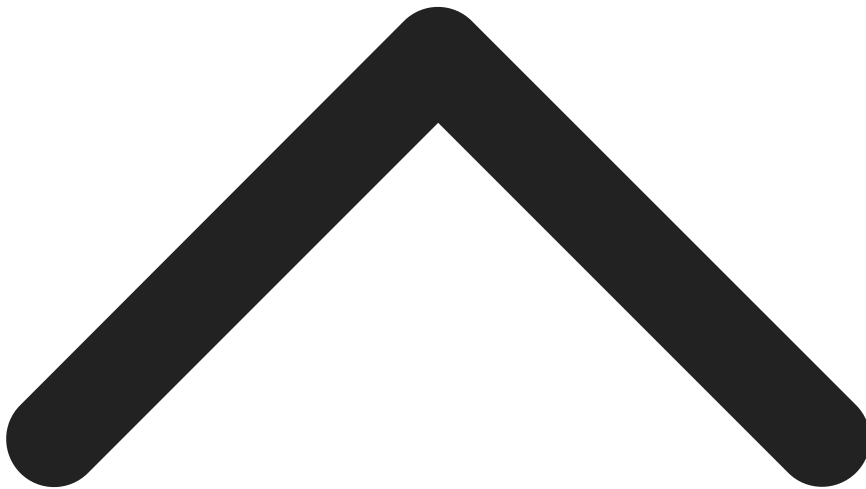

Read more



551



Show 9 Replies



Reply




[Msey.](#)



Mar 12, 2023

its definitely a medium question

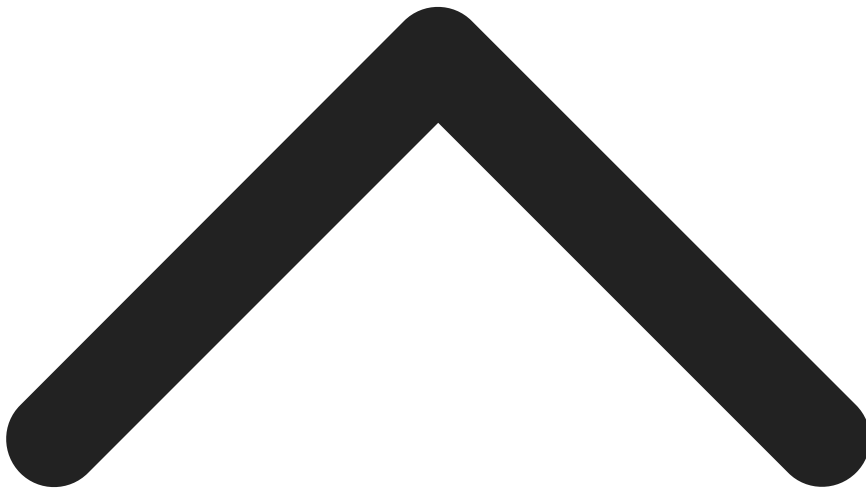

Read more



642



Show 18 Replies




Reply



[Prince Vijay](#)

Oct 18, 2022

I didn't understand the class given above. can anyone explain.

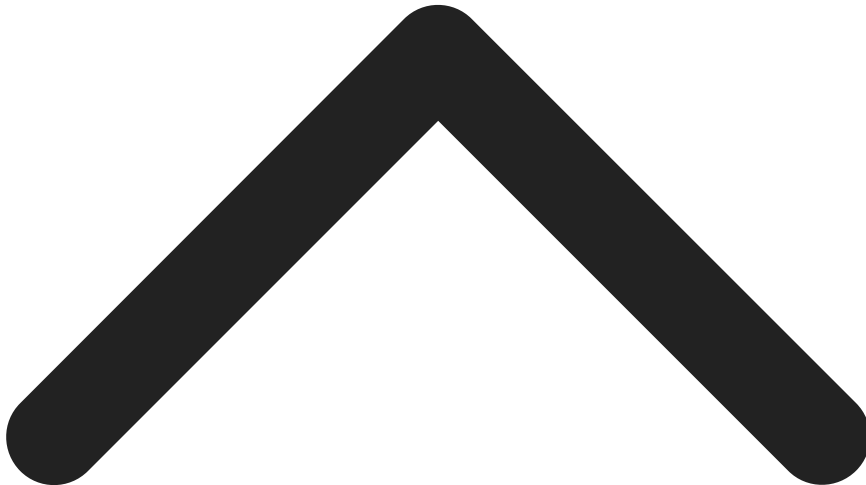

Read more
Ask Question



243



Show 12 Replies




Reply



[Nico Carinan](#)

May 17, 2021

WHY CANT WE USE CONCAT and SORT HERE, ANYbody?

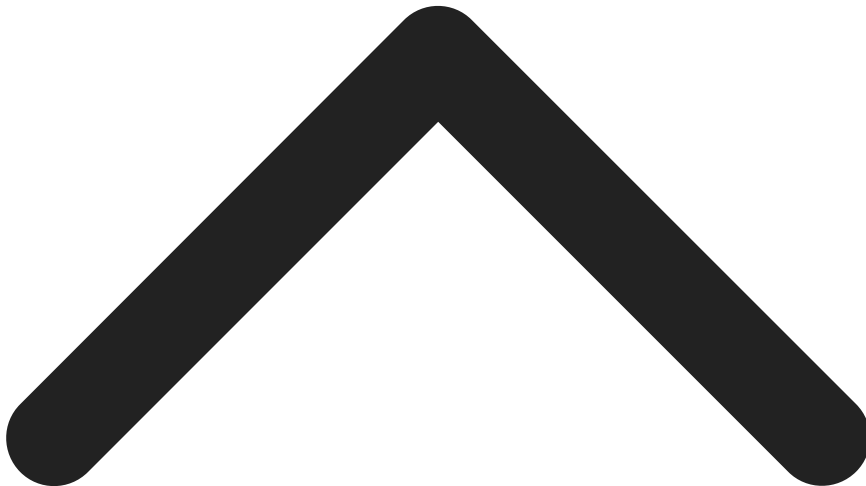

Read more



340





Show 32 Replies




Reply



[Vikas Malviya](#)

Mar 16, 2015

Please explain the meaning of splicing. Should I modify the two linked lists and make the new list from the existing nodes or should I create new nodes for the merged linked list.

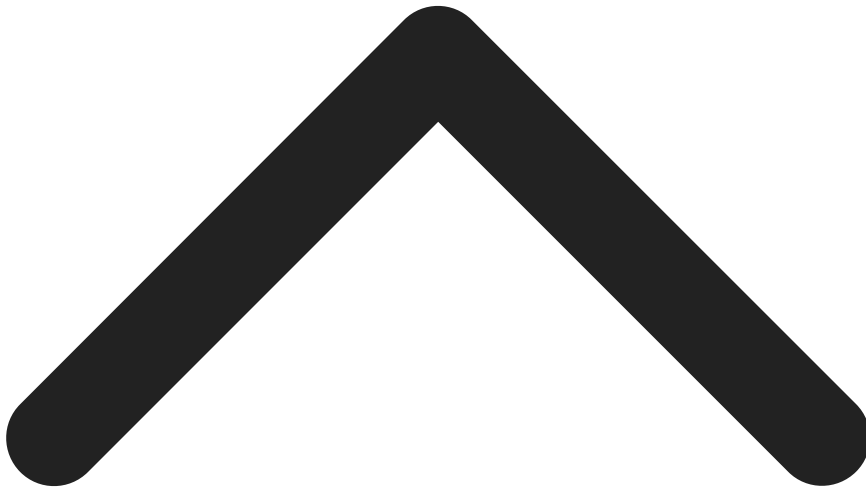

Read more



136



Show 11 Replies



Reply




[reducingcodex](#)

Sep 28, 2018

<https://www.geeksforgeeks.org/merge-two-sorted-linked-lists/>

For those confuseed about the question, its explained better here.

The question isn't explained well at all here.

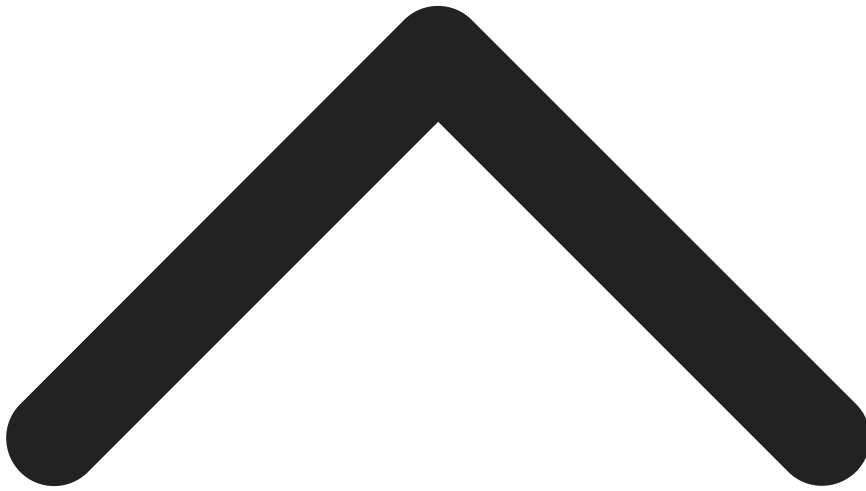

Read more



168



Show 4 Replies




Reply



[OOC](#)

Oct 03, 2019

Am i the only one who thinks this is a very vague requirement? Merging doesn't necessarily mean they have to be in increasing order, which it seems it's supposed to be. Seriously, write this stuff in the notes, so we don't waste time.

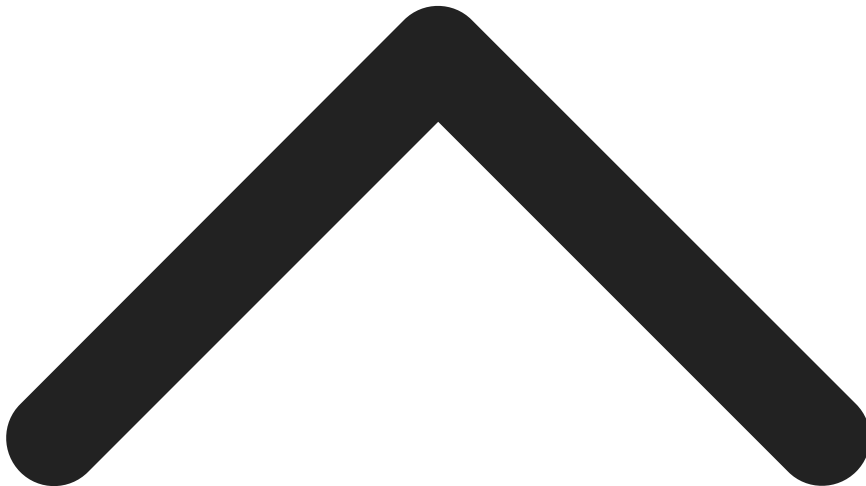

Read more



142



Show 9 Replies



Reply



[Youngin Lee](#)


Nov 01, 2021

hi I just started learning algorithm and here's my question:

I'm using IDE to write main and run my code but don't know what to input in the solution

the parameter of `mergeTwoLists()` is `ListNode` but in the Leetcode console the input goes like `[1,2,4]` `[1,3,4]` which seems like Array of Int??

if anyone can tell me what main function would look like it would be really helpful

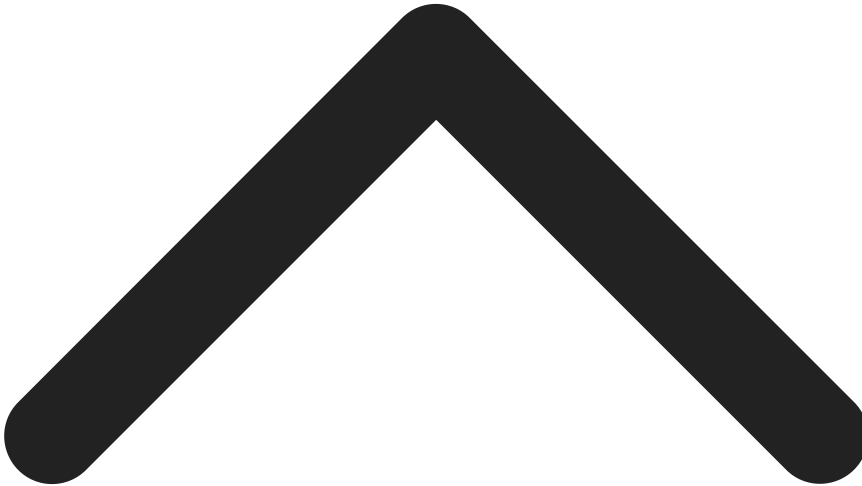

Read more



73





Show 7 Replies



Reply




[alexsherbuck](#)

Jan 23, 2023

Based on the documentation in the code, the edge cases may be improperly documented.


This explicitly states that this function returns a `ListNode`. The definition of a `ListNode` shows that `val` is set to whatever is passed or `0`.

```
/** javascript
 * Definition for singly-linked list.
 * function ListNode(val, next) {
 *     this.val = (val===undefined ? 0 : val)
 *     this.next = (next===undefined ? null : next)
 * }
 */
/**
 * @param {ListNode} list1
 * @param {ListNode} list2
 * @return {ListNode}
 */
var mergeTwoLists = function(list1, list2) {
```

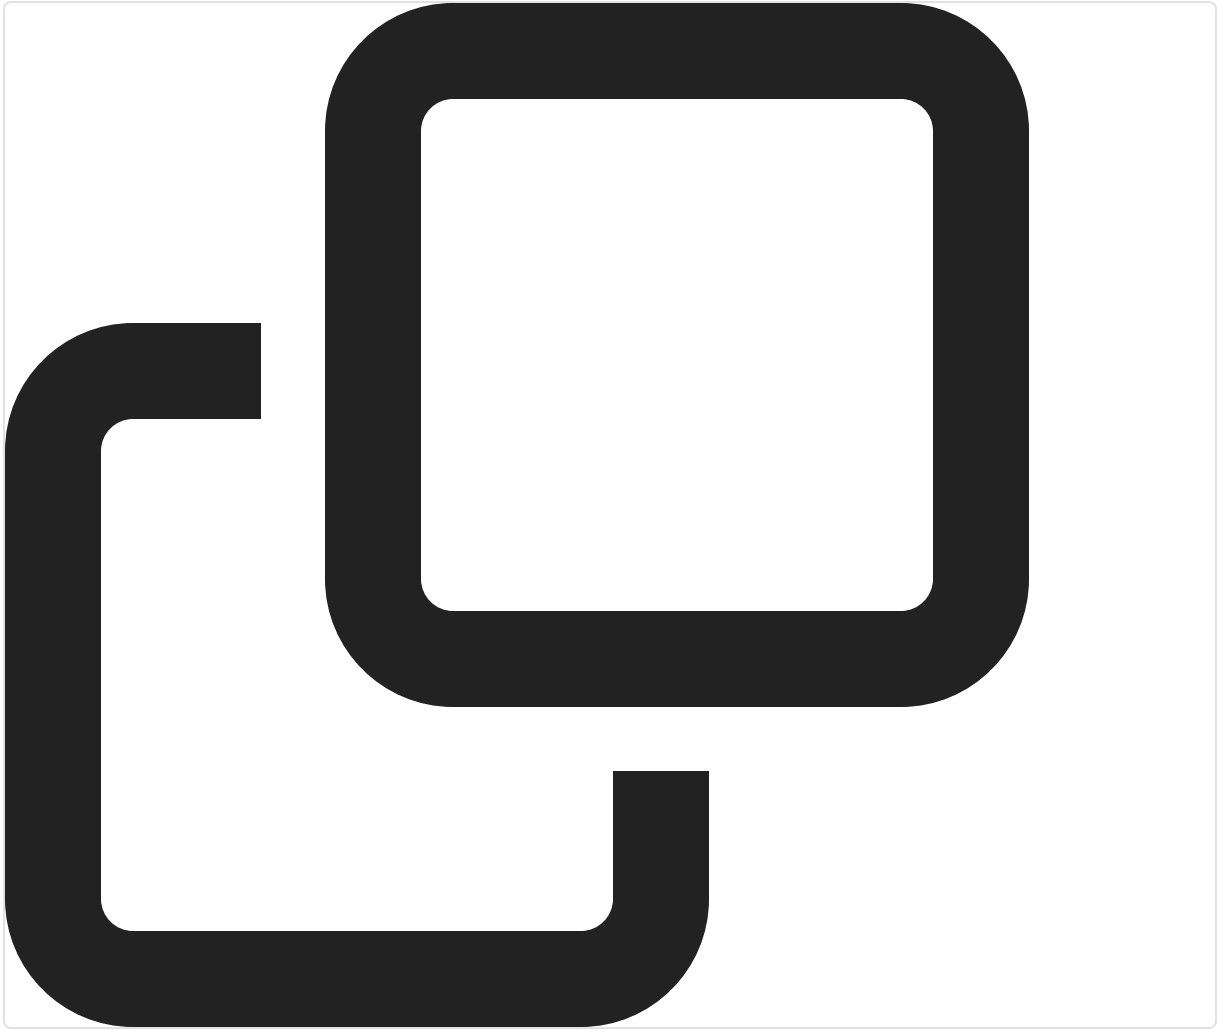

The second sample test case is:

```
list1 = []  
list2 = []  
Output  
[0]  
Expected  
[]
```

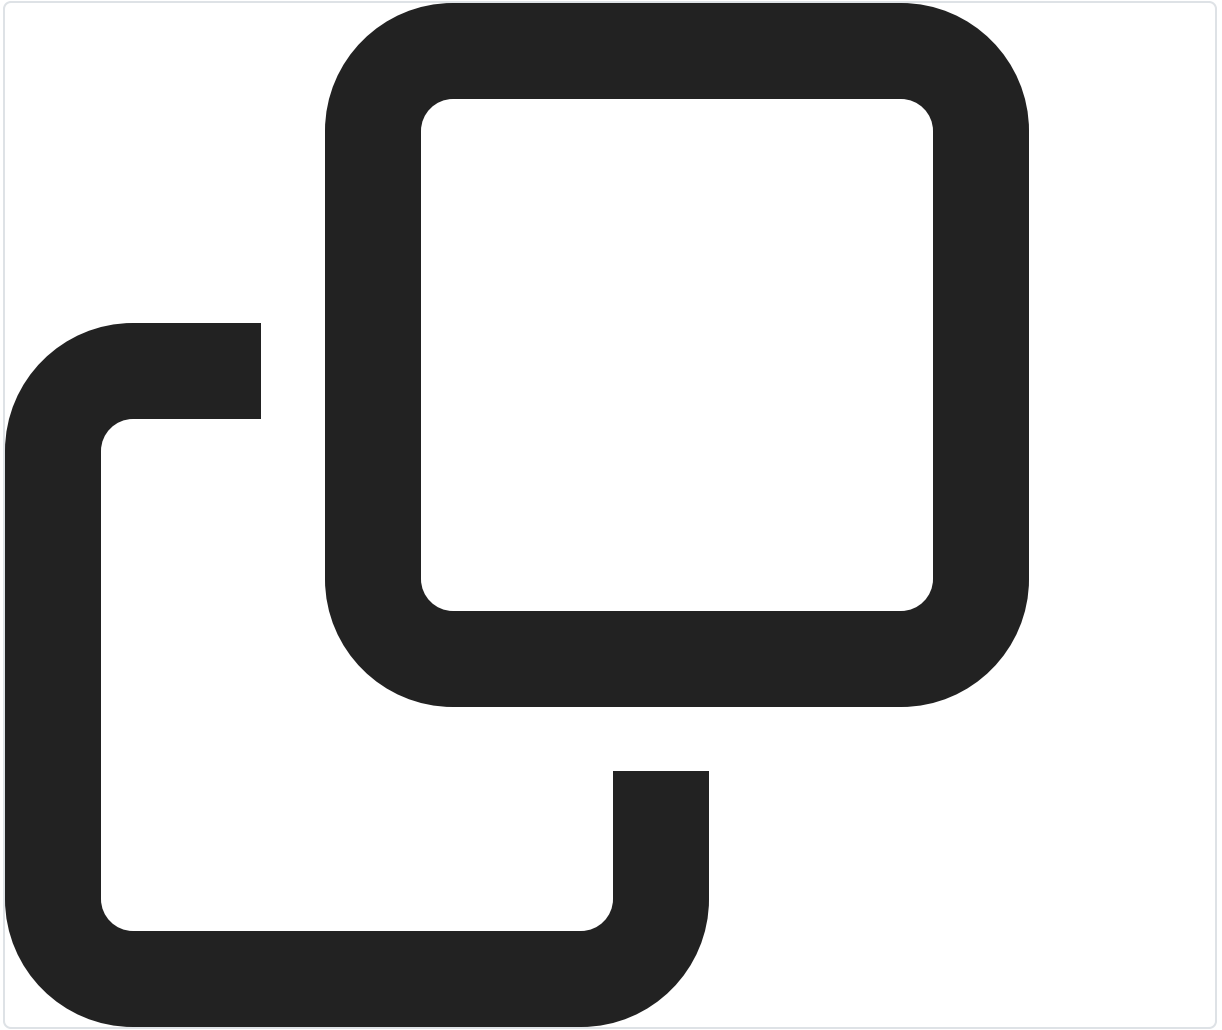

If you build the function to satisfy the documentation this test case will fail every time.

To me, this needs to change to `@return {ListNode | null }` but because of the test environment, `null === []` for the purposes of the 'Expected' block



Read more

Feedback



68



Show 9 Replies




Reply



[wolfpackfitdev](#)

Dec 13, 2022

does anyone else get a NullPointerException when trying to reference val?

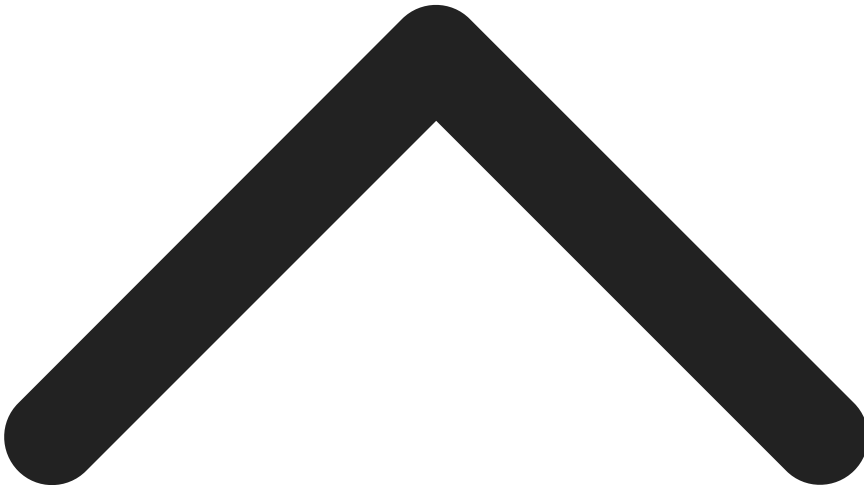

Read more



60



Show 5 Replies



Reply

Copyright © 2026 LeetCode. All rights reserved.



219 Online

1

2

3

4

5

6

7

/**

* Definition for singly-linked list.

* public class ListNode {

* int val;

* ListNode next;

* ListNode() {}

* ListNode(int val) { this.val = val; }





Saved

Ln 1, Col 1

You must run your code first



Stuck? Leet guides you through every line.

[Subscribe to Premium](#)

 Qwen

 Qwen3.5-Plus



FindHeaderBarSize

FindTabBarSize

FindBorderBarSize