iQOO HACKATHON 2026 · DEVELOPER TOOLS · HYDERABAD · TEAM MULANOUS

Context Engine

Index once. Let every coding agent continue with the right context.

Local, agent-agnostic repository intelligence for AI coding agents.

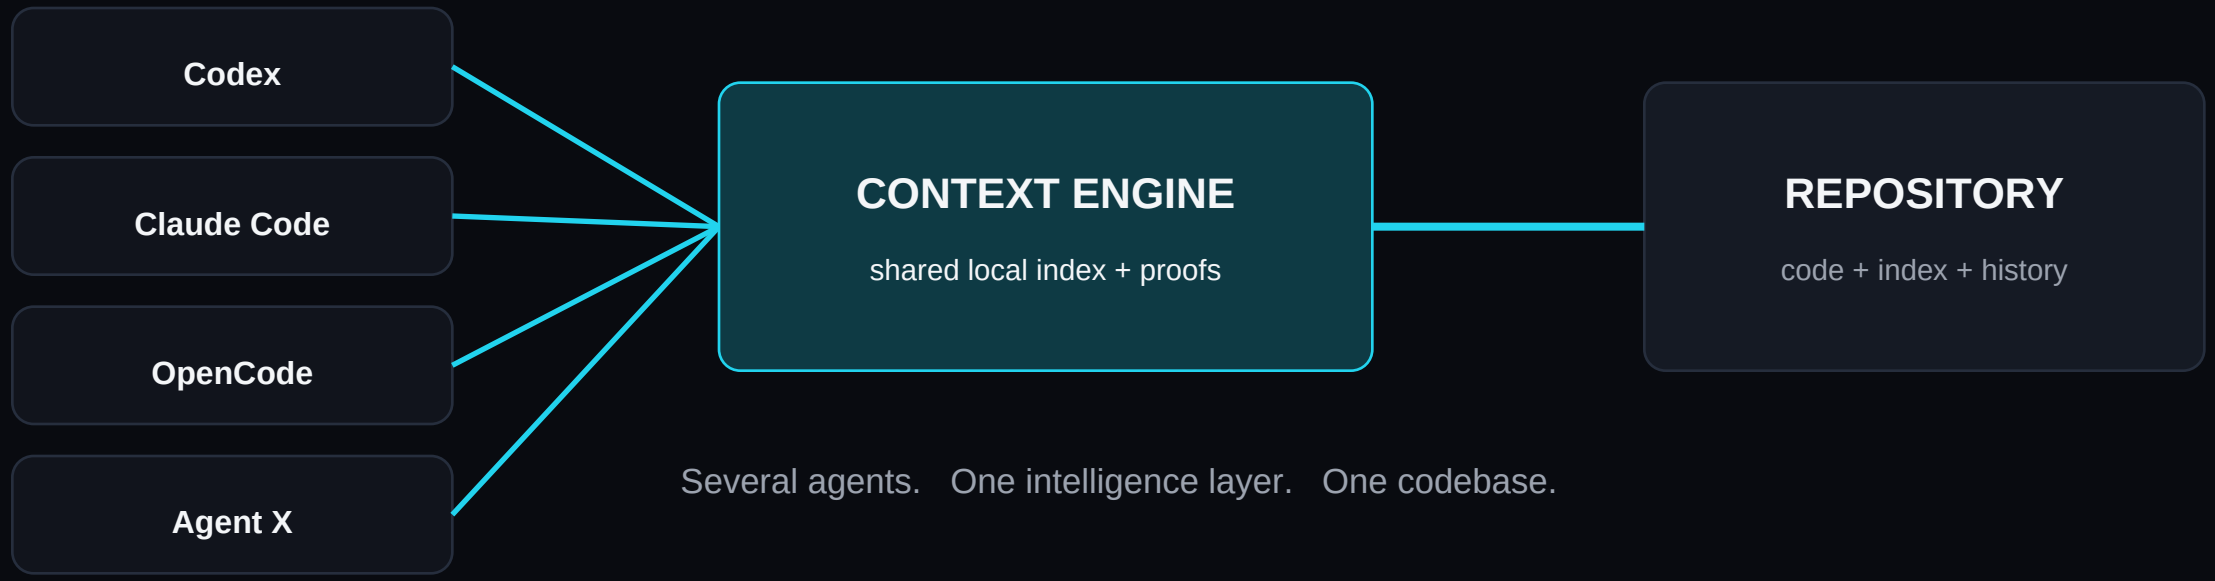

Several agents. One intelligence layer. One codebase.

THE PROBLEM

Every new coding agent starts from zero.

AGENT A — learns the repo

search → inspect → understand

symbols · dependencies · tests · architecture

SESSION ENDS — knowledge stays in chat history

AGENT B — repeats the work

search again → inspect → rediscover

same files · same symbols · same questions

REPO MAY HAVE CHANGED — old assumptions go stale

Wasted context

Repeated exploration burns context + tokens.

Lost continuity

Agent A's learning never transfers safely.

Stale evidence

Copied context rots as the repo changes.

THE SOLUTION

One repository intelligence layer. Any coding agent.

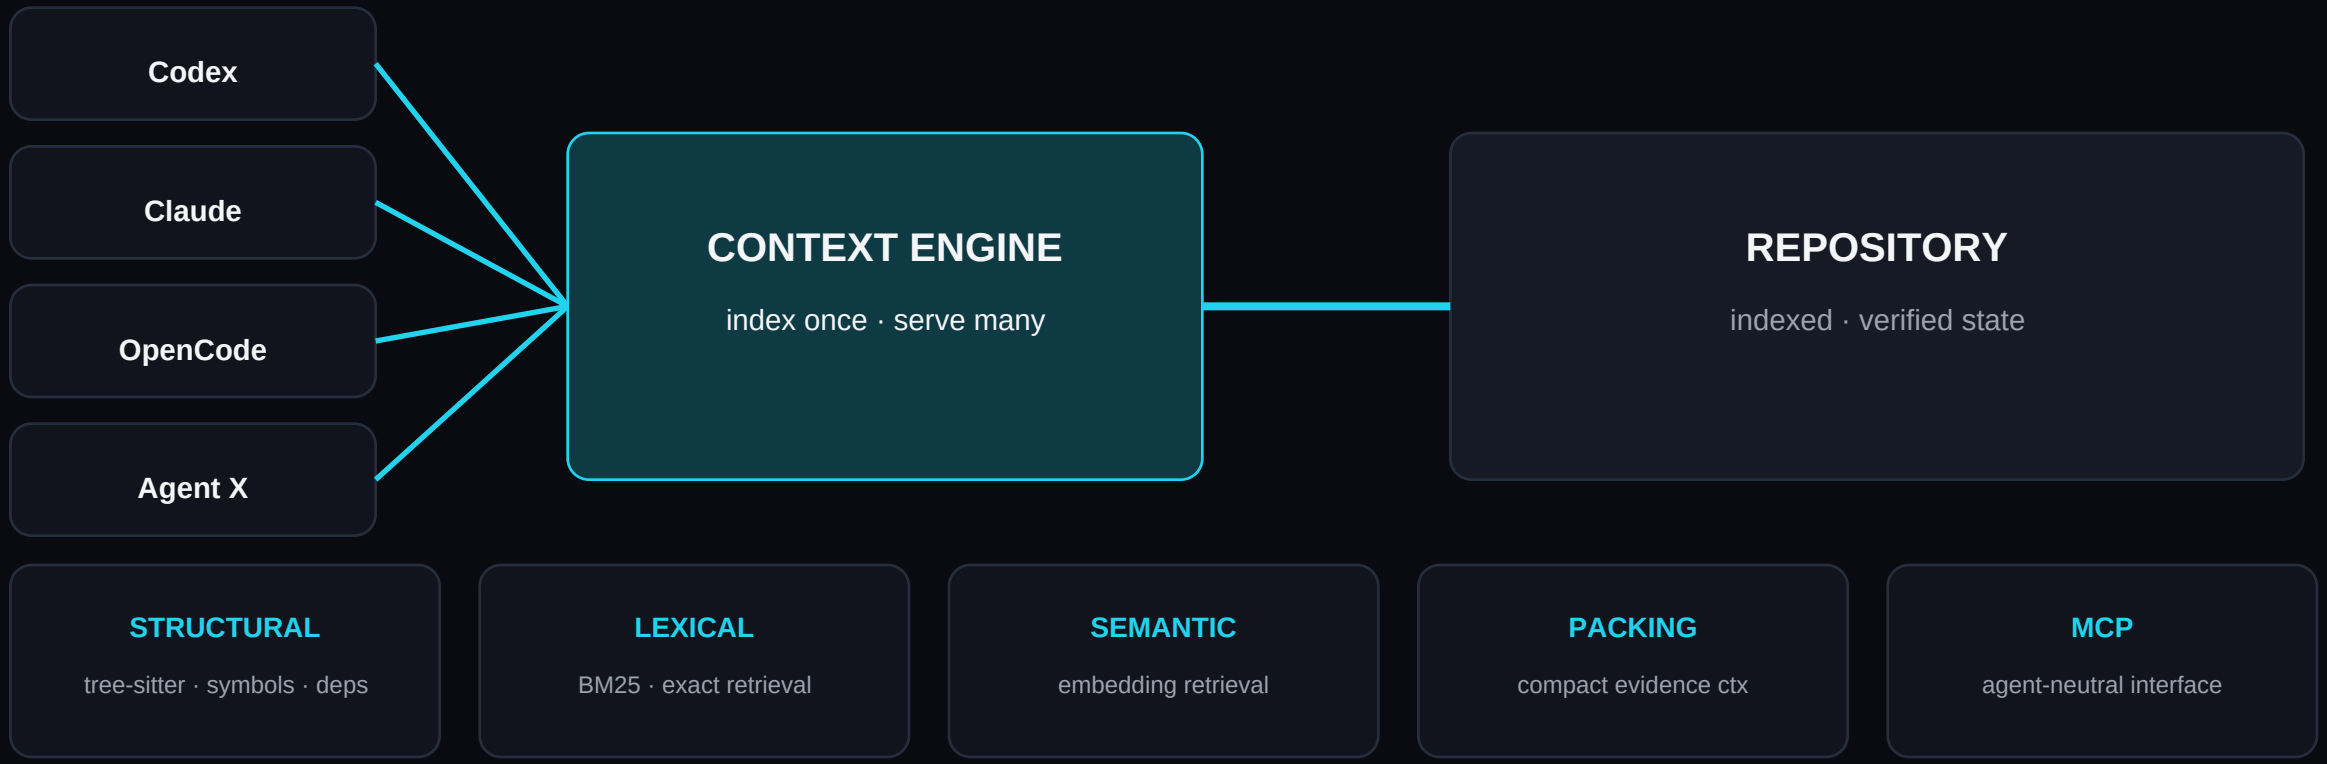

Context Engine indexes the repository once and serves focused evidence to compatible agents.

CORE DIFFERENTIATOR

Search is only step one. Continuity is the real problem.

1 · CONTEXT PROOF

"What did Agent A see?"

Hashes of evidence + repo state.

✓ BUILT

2 · CONTEXT DELTA

"Is that evidence still valid?"

UNCHANGED / CHANGED

REMOVED / UNVERIFIABLE

✓ BUILT

3 · CROSS-AGENT HANDOFF

"What should Agent B use now?"

Delta + fresh ctx + new proof.

◆ HACKATHON BUILD

No chat-history replay required.

Handoff reference is tiny; intelligence stays local.

LIVE DEMO

What the demo looks like — retry.rs · unrelated.rs

STEP 1 · Agent A asks

"Where is retry policy enforced?"

Returns evidence + Proof A.

STEP 2 · Dev edits unrelated.rs

Repository changes elsewhere.

Retry evidence unaffected.

STEP 3 · Agent B starts fresh

Only gets: query + Proof A.

No chat history transferred.

STEP 4 · Engine answers

UNCHANGED → fresh ctx → Proof B.

Continuity without replay.

THEN: dev modifies retry.rs → Agent C continues from Proof B → Delta: CHANGED → fresh context returned.

Same workflow proves both paths: untouched evidence stays valid, edited evidence is caught.

WHY IT MATTERS

Why this matters when developers use multiple AI agents.

LESS REDISCOVERY

One shared repo intelligence layer.

SAFER CONTINUITY

Old evidence checked before reuse.

AGENT INDEPENDENCE

Switch agents without moving chats.

Local-first

intelligence stays on machine

Deterministic

Proof → Delta → Handoff

Shared runtime

one resource-managed daemon

Conservative

UNVERIFIABLE > guessing

Search finds code. Context Engine makes repo context survive safely across agent sessions.

HACKATHON PLAN

What we will deliver at iQOO Hackathon 2026

ALREADY BUILT

- ✓ structural repo indexing
- ✓ hybrid retrieval
- ✓ shared daemon + MCP
- ✓ Context Proof (merged)
- ✓ Context Delta (merged)

HACKATHON BUILD

- → Cross-Agent Handoff
- → Agent A → B workflow
- → live MCP demo
- → controlled A/B evaluation:
  - task completion · repo exploration
  - tool calls · context usage

TEAM MULANOUS

Sandeep Gurram

mobile/web systems · backend
Rust / Go / TS · GCP / Postgres
retrieval infra · AI-agent workflows
Google hackathon participant

HACKATHON SCOPE

Pre-existing: indexing · hybrid retrieval · shared daemon · Context Proof · Context Delta

Built at iQOO: Cross-Agent Handoff · demo integration · A/B evaluation

One codebase. Many agents. Continuous context.