



Longest Substring with maximum K Distinct Characters (medium)

We'll cover the following ^

- Problem Statement
- Try it yourself
- Solution
- Code
 - Time Complexity
 - Space Complexity

Problem Statement

Given a string, find the length of the **longest substring** in it **with no more than k distinct characters**.

Example 1:

Input: String="araaci", K=2

Output: 4

Explanation: The longest substring with no more than '2' distinct characters is "araa".

Example 2:

Input: String="araaci", K=1

Output: 2

Explanation: The longest substring with no more than '1' distinct characters is "aa".

Example 3:

Input: String="cbbebi", K=3

Output: 5

Explanation: The longest substrings with no more than '3' distinct characters are "cbbeb" & "bbebi".

Example 4:

Input: String="cbbebi", K=10

Output: 6

Explanation: The longest substring with no more than '10' distinct characters is "cbbebi".

Try it yourself

Try solving this question here:



Java

Python3

JS

C++

```
1 import java.util.*;
2
3 class LongestSubstringKDistinct {
4     public static int findLength(String str, int k) {
5         // TODO: Write your code here
6         return -1;
7     }
8 }
9
```

Test

Save

Reset


Solution

This problem follows the **Sliding Window** pattern, and we can use a similar dynamic sliding window strategy as discussed in [Smallest Subarray With a Greater Sum](#). We can use a **HashMap** to remember the frequency of each character we have processed. Here is how we will solve this problem:

1. First, we will insert characters from the beginning of the string until we have **k** distinct characters in the **HashMap**.
2. These characters will constitute our sliding window. We are asked to find the longest such window having no more than **k** distinct characters. We will remember the length of this window as the longest window so far.
3. After this, we will keep adding one character in the sliding window (i.e., slide the window ahead) in a stepwise fashion.
4. In each step, we will try to shrink the window from the beginning if the count of distinct characters in the **HashMap** is larger than **k**. We will shrink the window until we have no more than **k** distinct characters in the **HashMap**. This is needed as we intend to find the longest window.
5. While shrinking, we'll decrement the character's frequency going out of the window and remove it from the **HashMap** if its frequency becomes zero.
6. At the end of each step, we'll check if the current window length is the longest so far, and if so, remember its length.

Here is the visual representation of this algorithm for the Example-1:



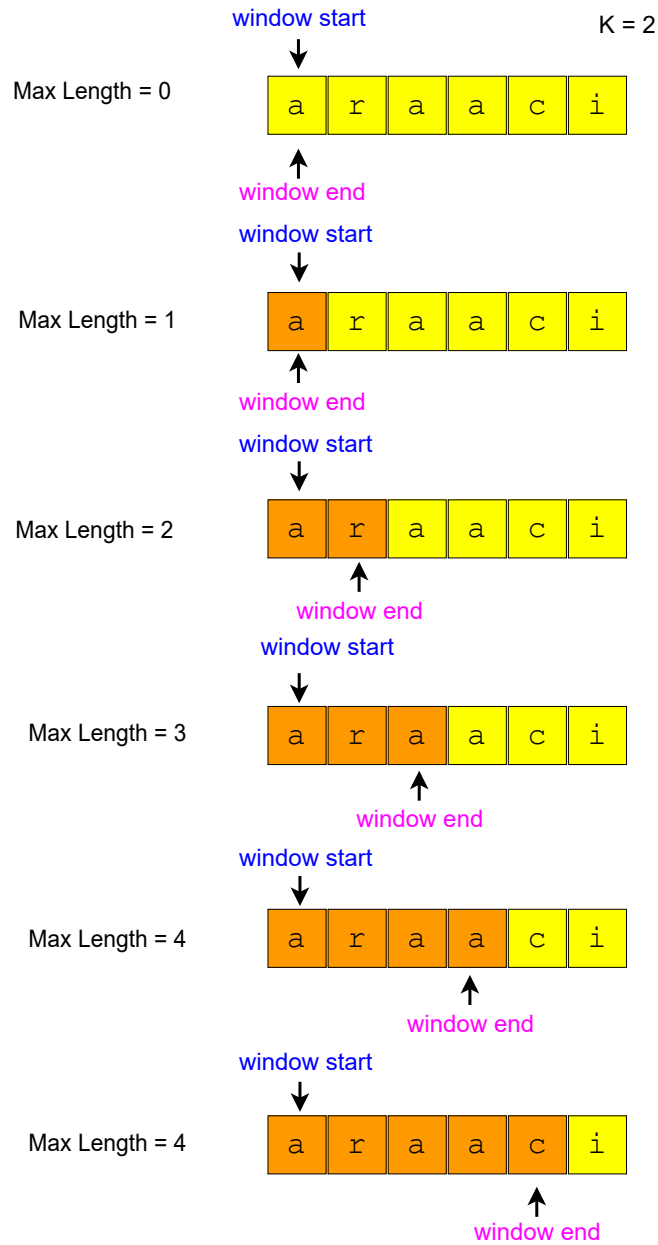

Number of distinct characters > 2, let's shrink the sliding window

