



LinkedList Cycle (easy)

We'll cover the following ^


- Problem Statement
- Try it yourself
- Solution
 - Code
 - Time Complexity
 - Space Complexity
- Similar Problems

Problem Statement


Given the head of a **Singly LinkedList**, write a function to determine if the LinkedList has a **cycle** in it or not.

Example:

Following LinkedList has a cycle:

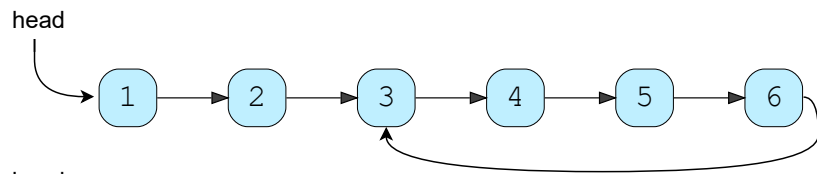

Following LinkedList doesn't have a cycle:



Try it yourself

Try solving this question here:

Java

Python3

JS

C++

```
1 class ListNode {
2     int value = 0;
3     ListNode next;
4
5     ListNode(int value) {
6         this.value = value;
7     }
8 }
9
10 class LinkedListCycle {
11
```



```

12 public static boolean hasCycle(ListNode head) {
13     // TODO: Write your code here
14     return false;
15 }
16
17 public static void main(String[] args) {
18     ListNode head = new ListNode(1);
19     head.next = new ListNode(2);
20     head.next.next = new ListNode(3);
21     head.next.next.next = new ListNode(4);
22     head.next.next.next.next = new ListNode(5);
23     head.next.next.next.next.next = new ListNode(6);
24     System.out.println("LinkedList has cycle: " + LinkedListCycle.hasCycle(head));
25
26     head.next.next.next.next.next.next = head.next.next;
27     System.out.println("LinkedList has cycle: " + LinkedListCycle.hasCycle(head));
28
29     head.next.next.next.next.next.next = head.next.next.next;
30     System.out.println("LinkedList has cycle: " + LinkedListCycle.hasCycle(head));
31 }
32 }

```

Run

Save

Reset



Solution

Imagine two racers running in a circular racing track. If one racer is faster than the other, the faster racer is bound to catch up and cross the slower racer from behind. We can use this fact to devise an algorithm to determine if a `LinkedList` has a cycle in it or not.

Imagine we have a slow and a fast pointer to traverse the `LinkedList`. In each iteration, the slow pointer moves one step and the fast pointer moves two steps. This gives us two conclusions:

1. If the `LinkedList` doesn't have a cycle in it, the fast pointer will reach the end of the `LinkedList` before the slow pointer to reveal that there is no cycle in the `LinkedList`.
2. The slow pointer will never be able to catch up to the fast pointer if there is no cycle in the `LinkedList`.

If the `LinkedList` has a cycle, the fast pointer enters the cycle first, followed by the slow pointer. After this, both pointers will keep moving in the cycle infinitely. If at any stage both of these pointers meet, we can conclude that the `LinkedList` has a cycle in it. Let's analyze if it is possible for the two pointers to meet. When the fast pointer is approaching the slow pointer from behind we have two possibilities:


1. The fast pointer is one step behind the slow pointer.
2. The fast pointer is two steps behind the slow pointer.

All other distances between the fast and slow pointers will reduce to one of these two possibilities. Let's analyze these scenarios, considering the fast pointer always moves first:

1. **If the fast pointer is one step behind the slow pointer:** The fast pointer moves two steps and the slow pointer moves one step, and they both meet.
2. **If the fast pointer is two steps behind the slow pointer:** The fast pointer moves two steps and the slow pointer moves one step. After the moves, the fast pointer will be one step behind the slow pointer, which reduces this scenario to the first scenario. This means that the two pointers will meet in the next iteration.



This concludes that the two pointers will definitely meet if the LinkedList has a cycle. A similar analysis can be done where the slow pointer moves first. Here is a visual representation of the above discussion:

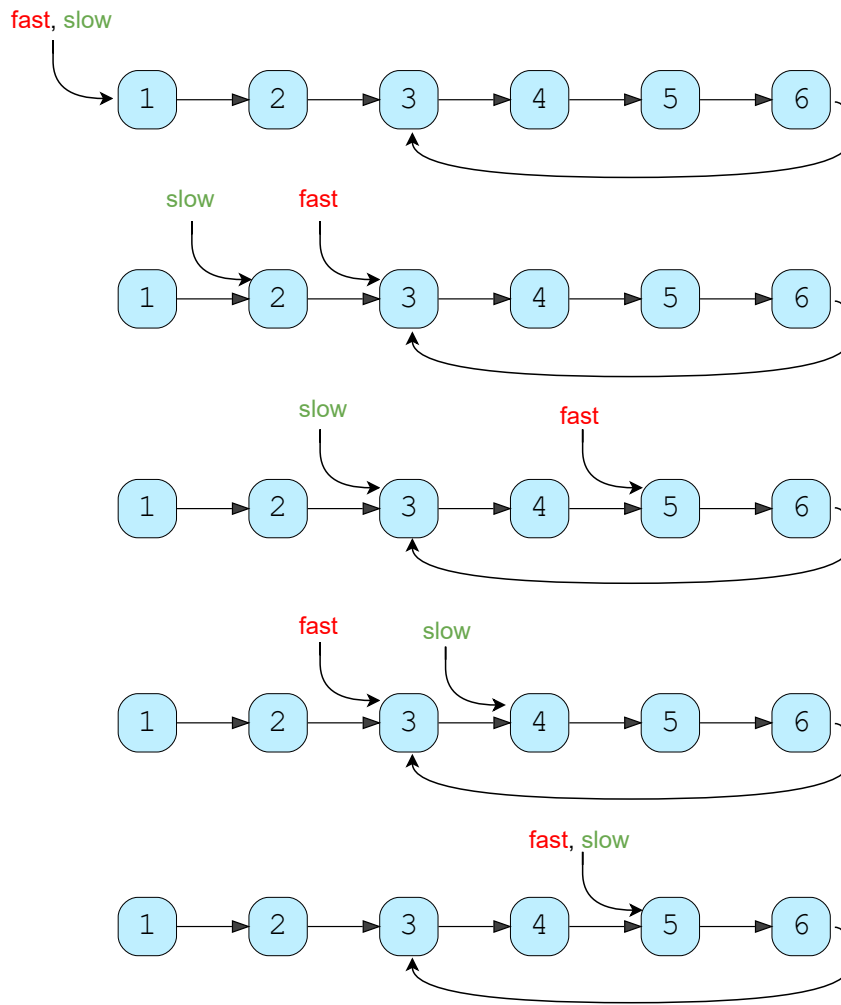

Code

Here is what our algorithm will look like:



```

1 class ListNode {
2     int value = 0;
3     ListNode next;
4
5     ListNode(int value) {
6         this.value = value;
7     }
8 }
9
10 class LinkedListCycle {
11
12     public static boolean hasCycle(ListNode head) {
13         ListNode slow = head;
14         ListNode fast = head;
15         while (fast != null && fast.next != null) {
16             fast = fast.next.next;

```



```

16     fast = fast.next.next;
17     slow = slow.next;
18     if (slow == fast)
19         return true; // found the cycle
20 }
21 return false;
22 }
23
24 public static void main(String[] args) {
25     ListNode head = new ListNode(1);
26     head.next = new ListNode(2);
27     head.next.next = new ListNode(3);
28     head.next.next.next = new ListNode(4);
29     head.next.next.next.next = new ListNode(5);
30     head.next.next.next.next.next = new ListNode(6);
31     System.out.println("LinkedList has cycle: " + LinkedListCycle.hasCycle(head));
32
33     head.next.next.next.next.next.next = head.next.next;
34     System.out.println("LinkedList has cycle: " + LinkedListCycle.hasCycle(head));
35
36     head.next.next.next.next.next.next = head.next.next.next;
37     System.out.println("LinkedList has cycle: " + LinkedListCycle.hasCycle(head));
38 }
39 }

```

Run

Save

Reset



Time Complexity

As we have concluded above, once the slow pointer enters the cycle, the fast pointer will meet the slow pointer in the same loop. Therefore, the time complexity of our algorithm will be $O(N)$ where 'N' is the total number of nodes in the LinkedList.

Space Complexity

The algorithm runs in constant space $O(1)$.

Similar Problems

Problem 1: Given the head of a LinkedList with a cycle, find the length of the cycle.

Solution: We can use the above solution to find the cycle in the LinkedList. Once the fast and slow pointers meet, we can save the slow pointer and iterate the whole cycle with another pointer until we see the slow pointer again to find the length of the cycle.

Here is what our algorithm will look like:

Java
 Python3
 C++
 JS

```

1  class ListNode {
2      int value = 0;
3      ListNode next;
4
5      ListNode(int value) {
6          this.value = value;
7      }
8  }
9
10 class LinkedListCycleLength {

```



```
11
12 public static int findCycleLength(ListNode head) {
13     ListNode slow = head;
14     ListNode fast = head;
15     while (fast != null && fast.next != null) {
16         fast = fast.next.next;
17         slow = slow.next;
18         if (slow == fast) // found the cycle
19             return calculateLength(slow);
20     }
21     return 0;
22 }
23
24 private static int calculateLength(ListNode slow) {
25     ListNode current = slow;
26     int cycleLength = 0;
27     do {
28         current = current.next;
29         cycleLength++;
30     } while (current != slow);
31     return cycleLength;
32 }
33
34 public static void main(String[] args) {
35     ListNode head = new ListNode(1);
36     head.next = new ListNode(2);
37     head.next.next = new ListNode(3);
38     head.next.next.next = new ListNode(4);
39     head.next.next.next.next = new ListNode(5);
40     head.next.next.next.next.next = new ListNode(6);
41     head.next.next.next.next.next.next = head.next.next;
42     System.out.println("LinkedList cycle length: " + LinkedListCycleLength.findCycleLength(head));
43
44     head.next.next.next.next.next.next = head.next.next.next;
45     System.out.println("LinkedList cycle length: " + LinkedListCycleLength.findCycleLength(head));
46 }
47 }
```

Run

Save

Reset



Time and Space Complexity: The above algorithm runs in $O(N)$ time complexity and $O(1)$ space complexity.

[← Back](#)

Completed

[Next →](#)[Introduction](#)[Start of LinkedList Cycle \(medium\)](#)