
Python - Day - 17

Change the Dict items:-

→ By using the key → key hash value →
↳ efficient → time less

```
a = {"name": "pavan", "age": 22}
a['name'] = "pravadh"
print(a)  # {"name": "pravadh", 'age': 22}
```

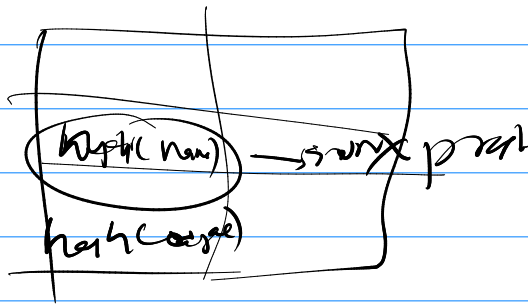

→ update() method :

it can insert the specified items to the Dict.
→ it should iterable (Dict)

```
a = {"name": "pavandh", 'age': 21}
a.update({'Roll-no': 225})
print(a) #{"name": 'pravadh', 'age': 21
          'Roll_no': 225}
```

→ memory id

it changes memory size not ID

Adding items to dict:-

→ By using key

```
a = {"name": 'guru', age: 22}
a['Roll_no'] = 221
print(a)  #
```


→ Updated

Remove items:-

pop() → This method removes the specified item from dict

→

```
dict.pop(keyname)
```

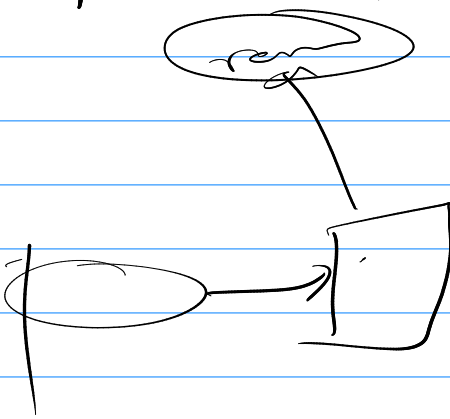

```
a = {'name': 'ram', age: 21}
a.pop('name')
print(a) # {'age': 21}
```

popitem()

→ This will remove the random elements
→ tuple returned

```
a = {'name': 'gui', 'age': 21}
a.popitem()          ('name', 'gui')
print(a)  # Random one item removed
```

del:

→ key word which remove particular item and whole dict

a = {'nam': 'guru', 'age': 21} → obj: dict()

a['nam']

print(a) # {'age': 21}

del a

print(a)

a is not defined

→ clear: empties the dict

a = {'nam': 'guru', 'age': 21}

a.clear()

print(a) → {}

copy:

→ copy the specified dict put in another memory location

a = {'nam': 'guru', 'age': 21} → obj id

b = a.copy() → object id

print(b) # {'nam': 'guru', 'age': 21}

loops :-

a = [1, 2, 3]

→ for i in a:

print(i) 1
2
3

a = {name: "guru", age: 21}

for i in a.keys():

print(i) # name
age

for i in a.values():

print(i)
guru
21

for i, j in a.items():

print(i, j) name guru
age 21