Day-17

boolean datatype:-

-> it represent two logical states

① True -> ① -> True -> ① ->

② false -> ⓪, None, " ", [ ], 0.0

-> def ____

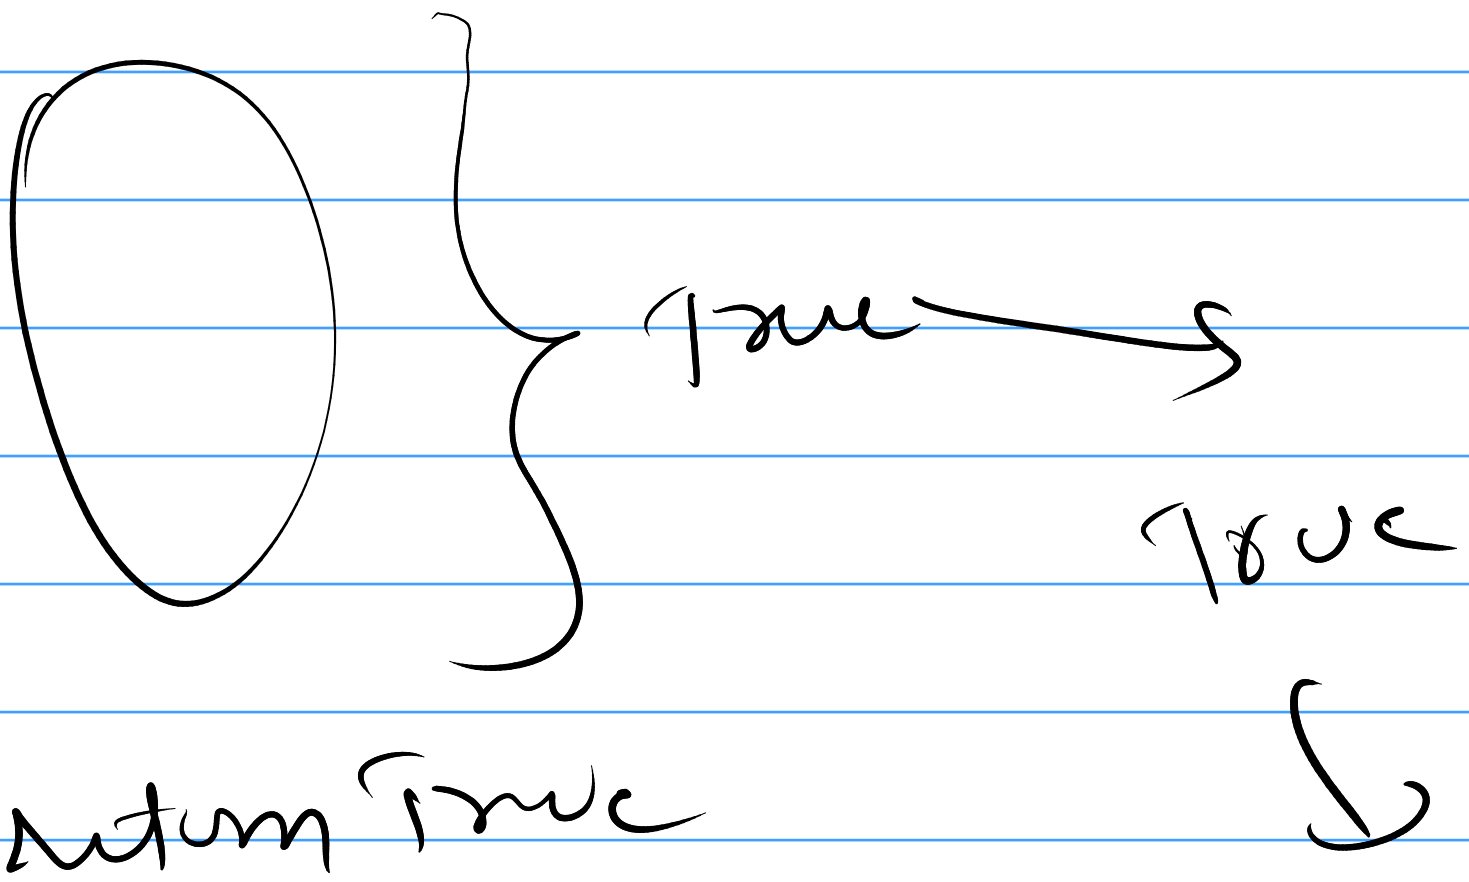

return True

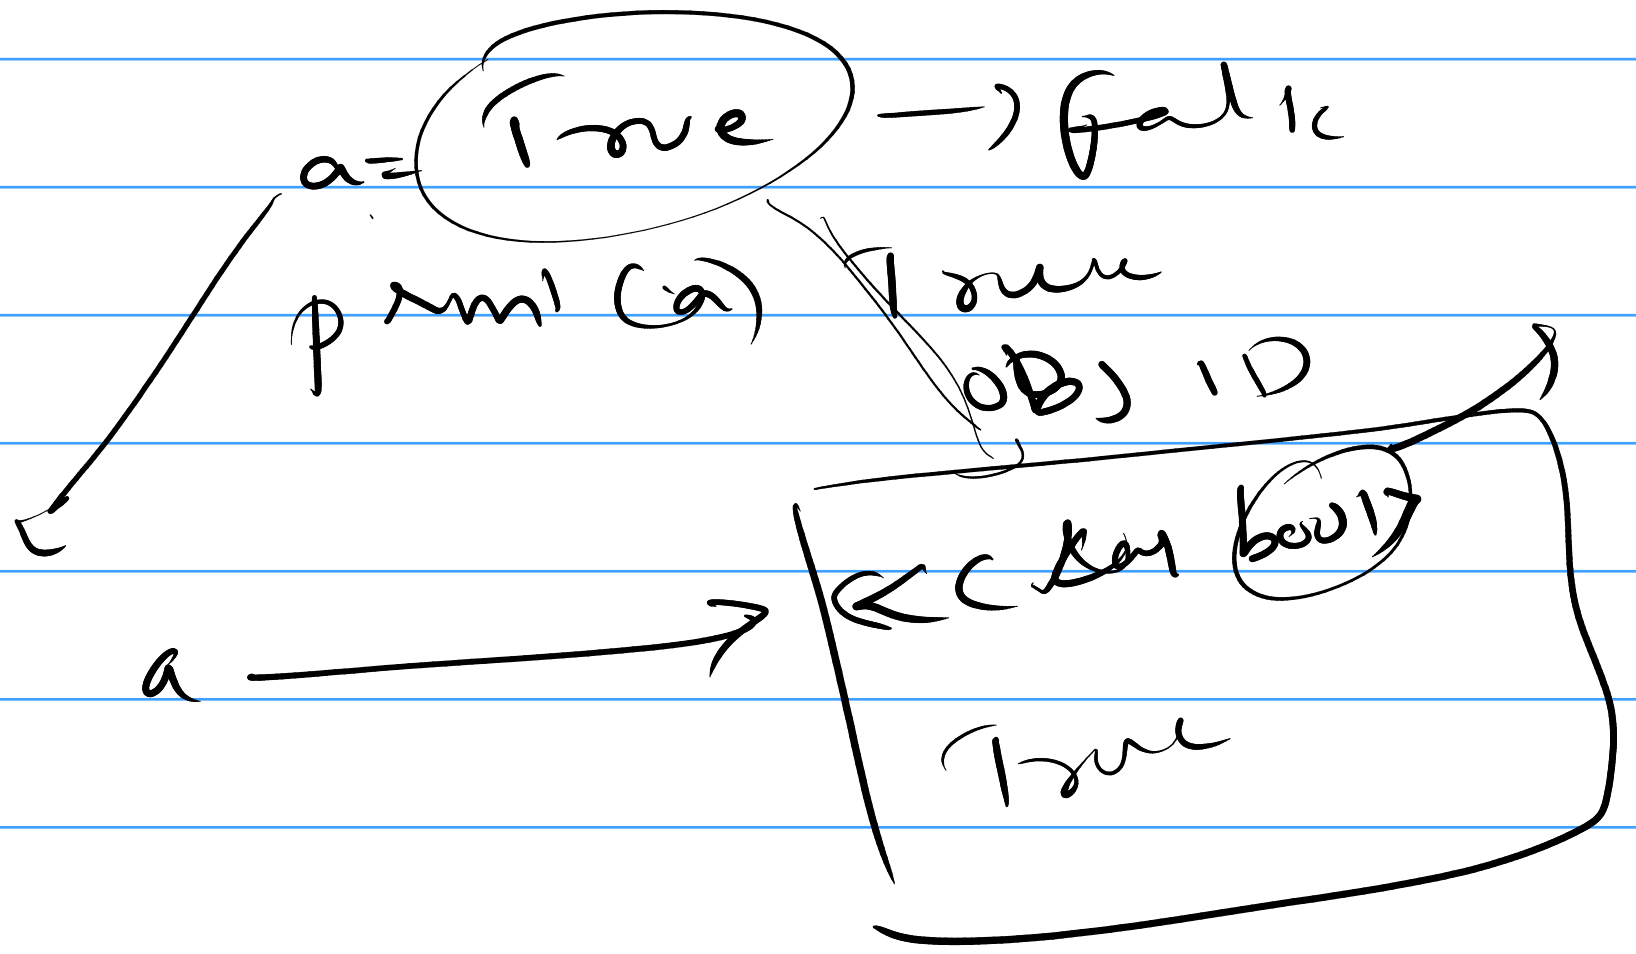

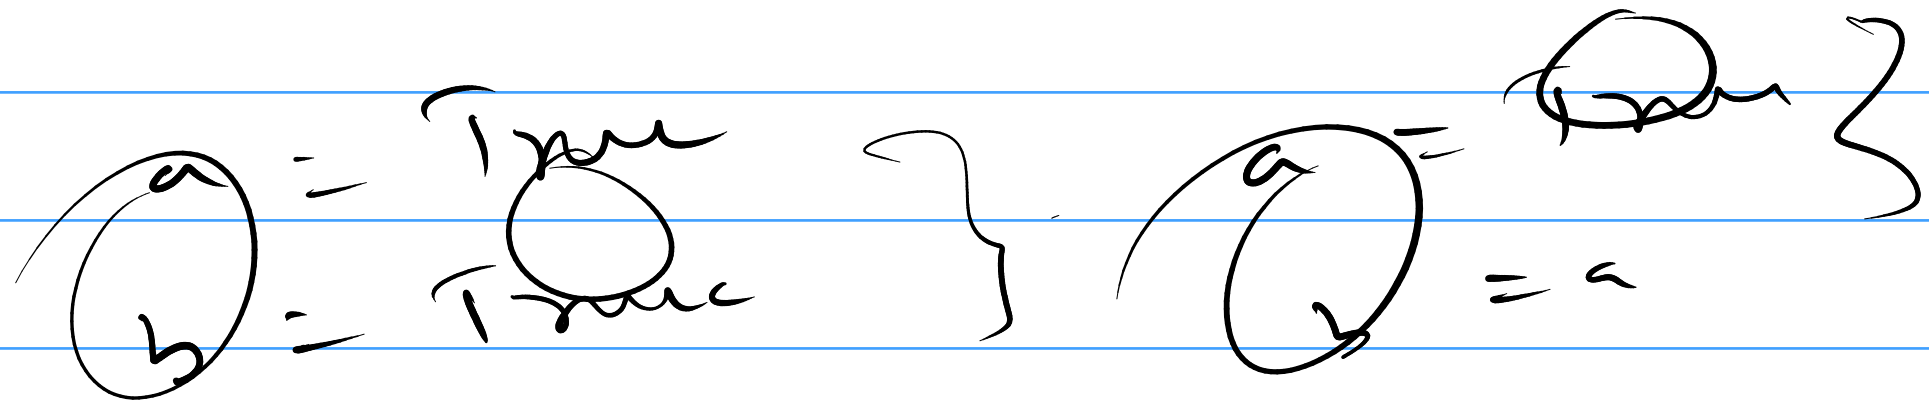

boolean operators:

→ and   or   not   ex-or

True and True → True
True and False → False
False and True → False
False and False → False

True or True → True
True or False → Tru
False or True → Tru
False or False → Fal

Not True → False
Not False → True

Truthiness:

1 → 10 → True

```
x = 10
if x:
    print(x)
```

10 →
```
if True:
    print(x)
```

10

→ falsy value → False, None, 0, "", 0.0, [], {}, set(), ()

```
x = None
if x:
    print(x)
```

→ empty

→ #

Binary data:-

→ 0, 1 → ~~ms~~ represents the bytes where in between 0 to 255

1 byte → 8 bits

① Byte ② Bytearray ③ memory-view

(1) Bytes:- → [ ] → Bytes → with →

→ immutable bytes sequence of integers from 0 to 255

d = b"Jagadeesh"

Print(d) # b'Jagadeesh'

with re (==) → d → class bytes b"Ja

Bytearray:-

Mutable → ~~wate~~ sequence → 0 to 255

→ Read only → Write only

a — <class bytearray> Jaga

a = bytearray(b"Jagadeesh")

print(a) # bytearray(b"Jaga")

print(type(a)) <class bytearray> (H)

a[0] = 72 → # H 74 → J

Memory view:-

Ma 26

→ 109

Name - byte

using 100 bytes

100 → Mega Byte file

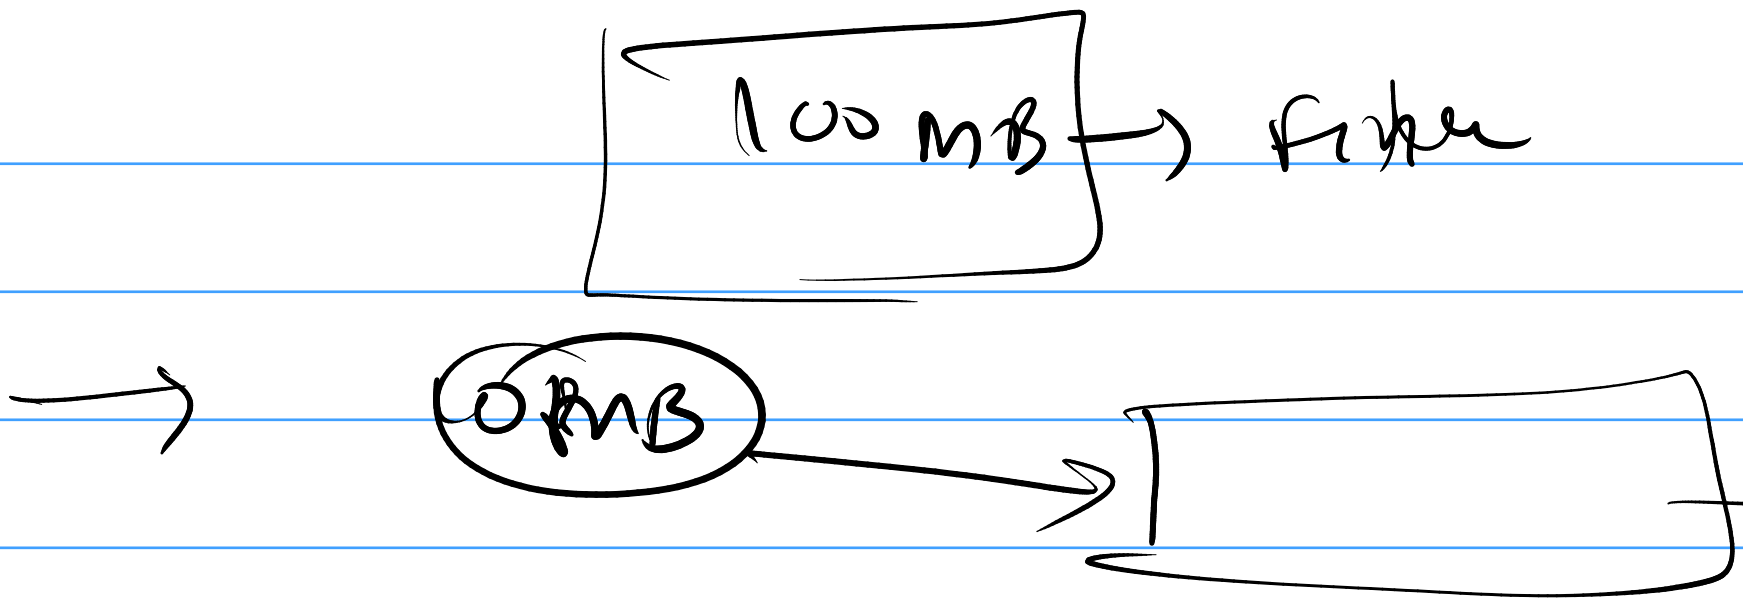

→ memory view
↓
part use array
the 10mb
↓
fast operations

```
data = bytearray(——)
view = memoryview(data)
part = view[1000: 2000]
```

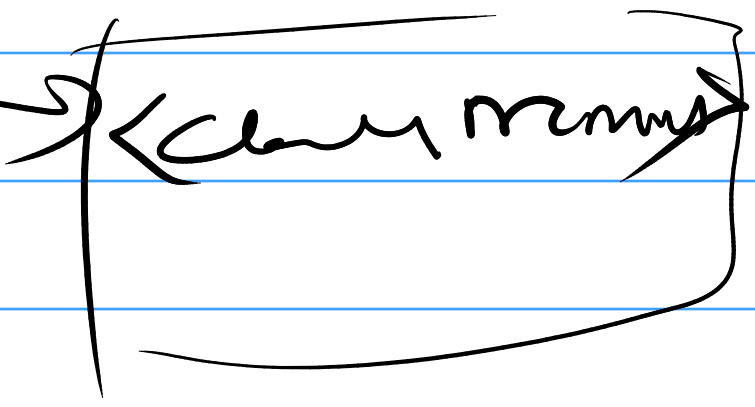

None:-
→ No value → 0, → '', [], ()

<class None>

```
x = None
print(type(x))
```

List
if data



Practically
empty
sequences
[illegible]

Returns
use
None — 0[ ],

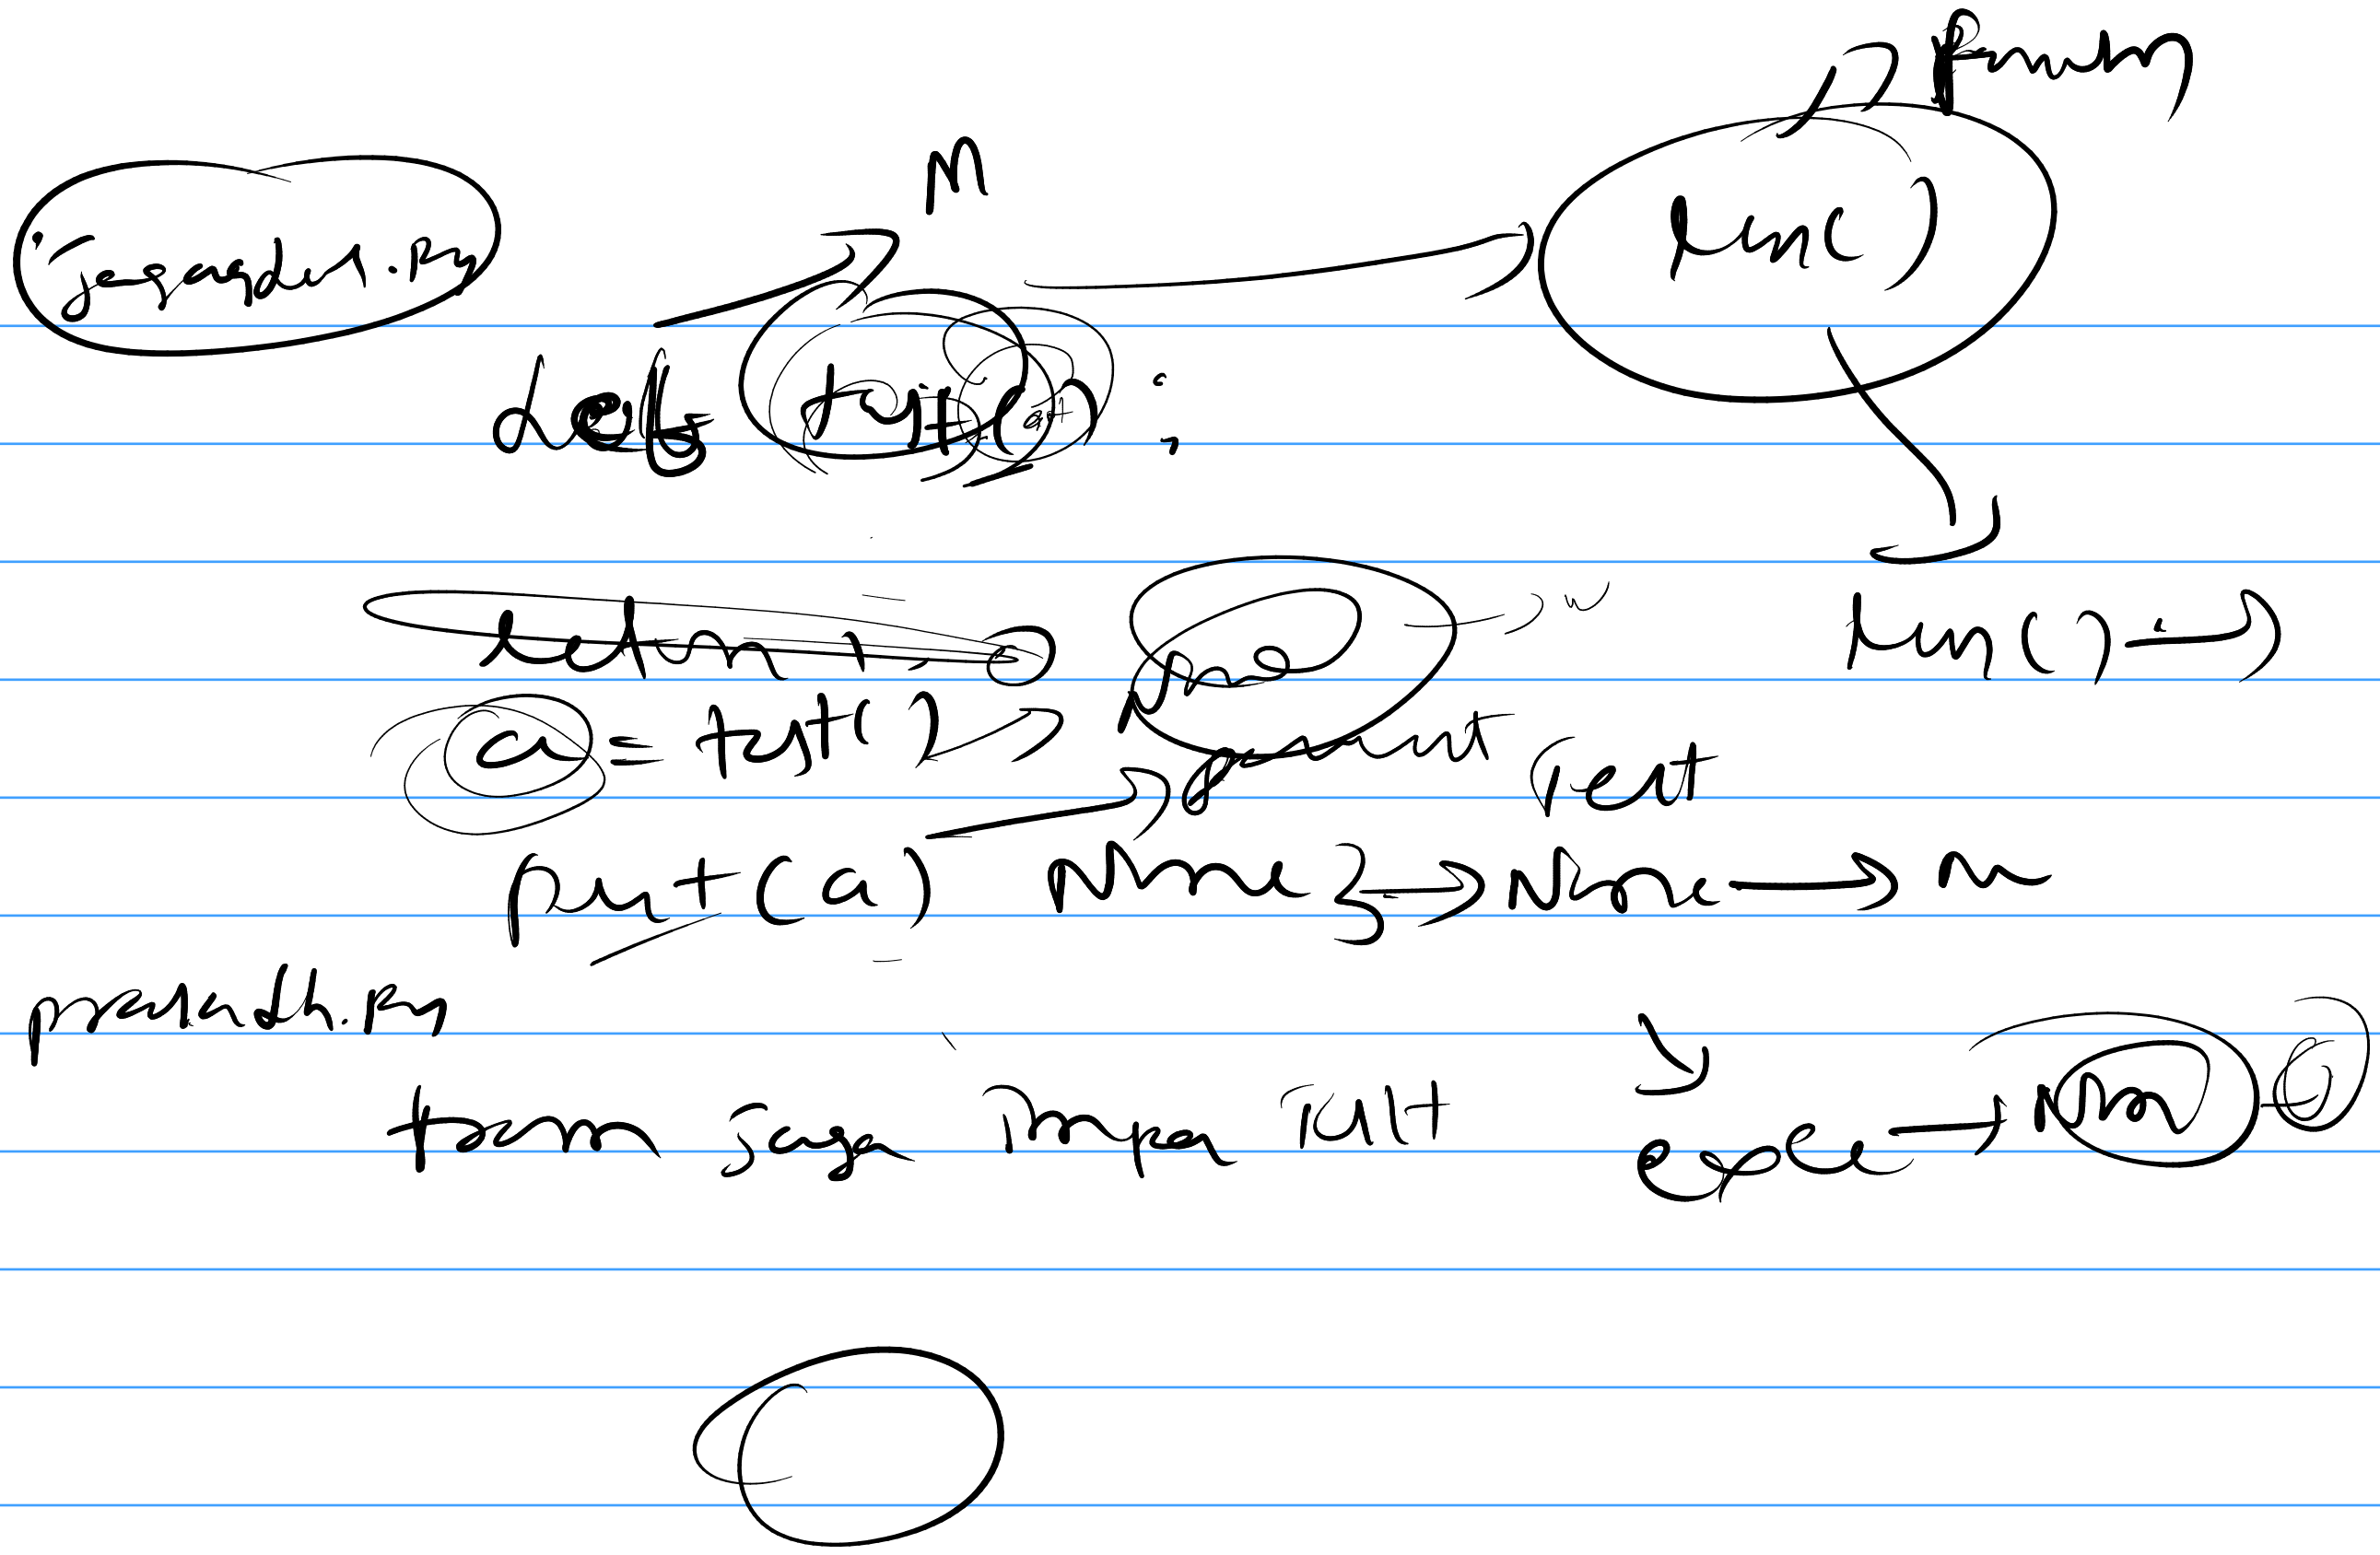
jeyagadul.py
M
def test():
fun()
function
fun()
~~return 1~~
None
a = test()
print
ret
print(a)
None
None
m
prashanth.py
team saga impa Tult
exec
None
0