python - Day - 21

conditional statements:

memory management

Automatic memory allocation deallocation

What is the existance condition statement?

statement → line of code → instruction

print("Hello world") → instruction

→ conditional statement → control flow statement

① sequence → print('jagadi')

print('gopi')

print('prani')

② selection → age = 20

True/False

if age > 18:

print('vote elsi')

③ Iteration → loop → [10, 20, 30]

10 — 20 — 30



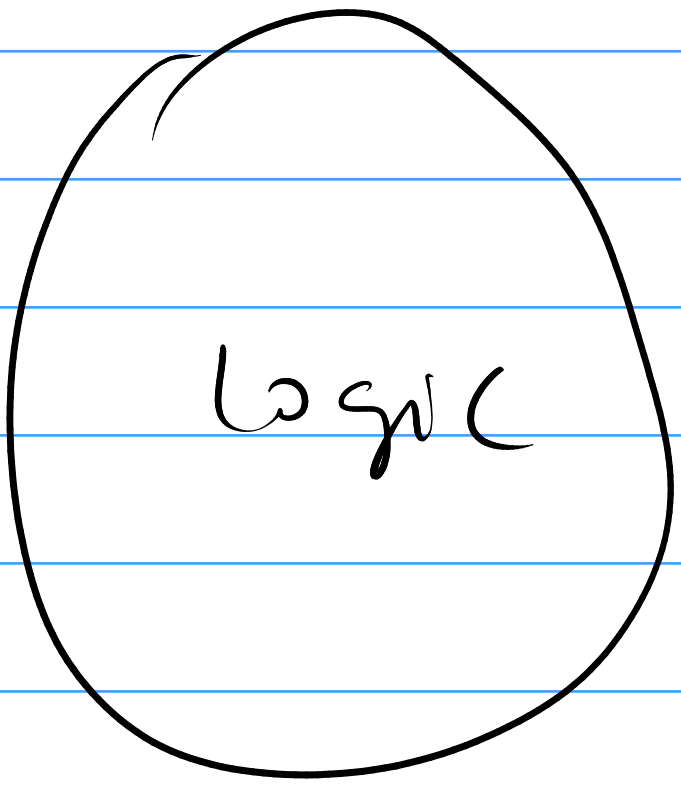

conditional → sequence ✗ → selection ✓

What condition?:

→ expression → python evalu → T / F

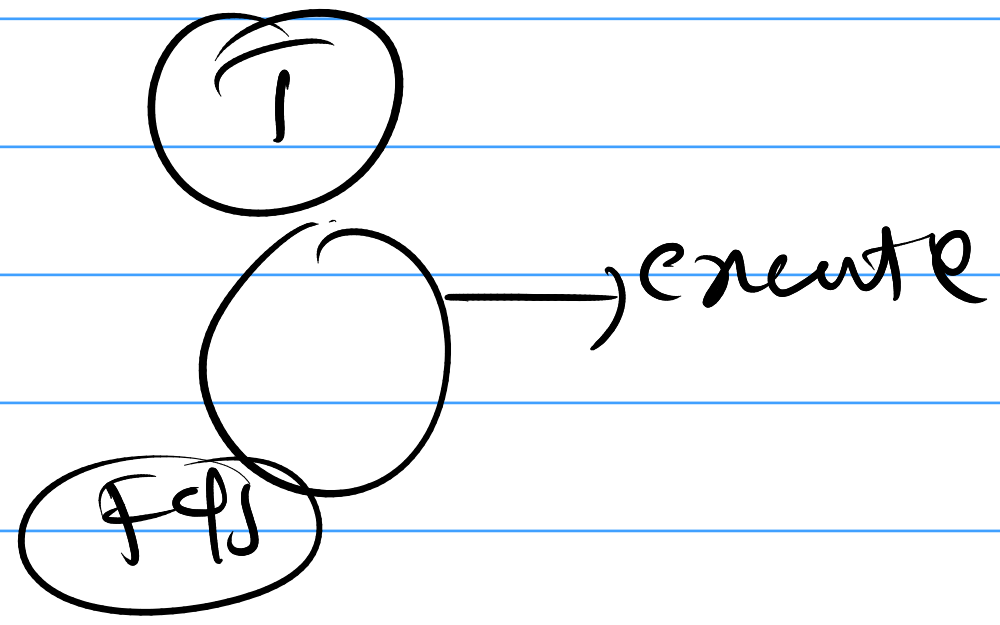

if statement:

→ if keyword

→ conditional statement

T/F

if (expression):

group code

age = 15

```
if age > 18:
    print("adult")
print("program finished")
```

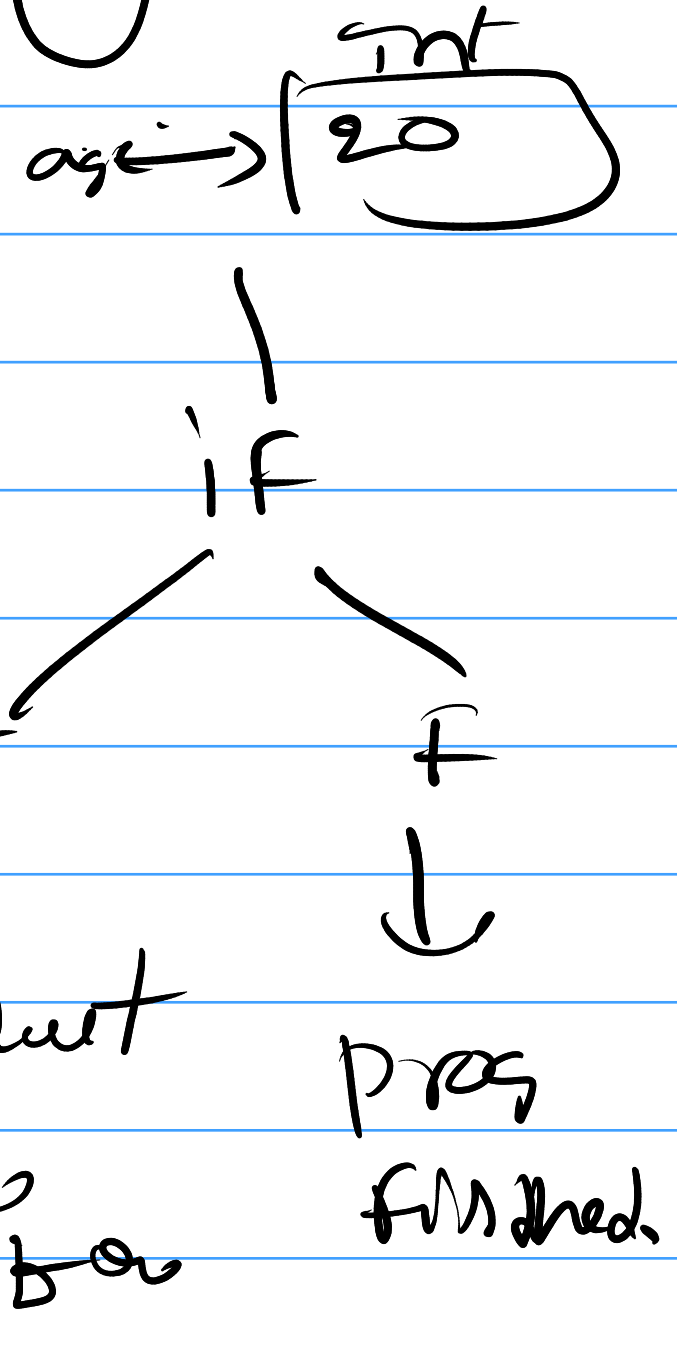

→ single condition handled.

if-else:

→ Two condition → Two solution path

1.

Two possibility { path / condition

```
age = 15

if age>18 :
    print('adult')
else:
    print('minor')
```

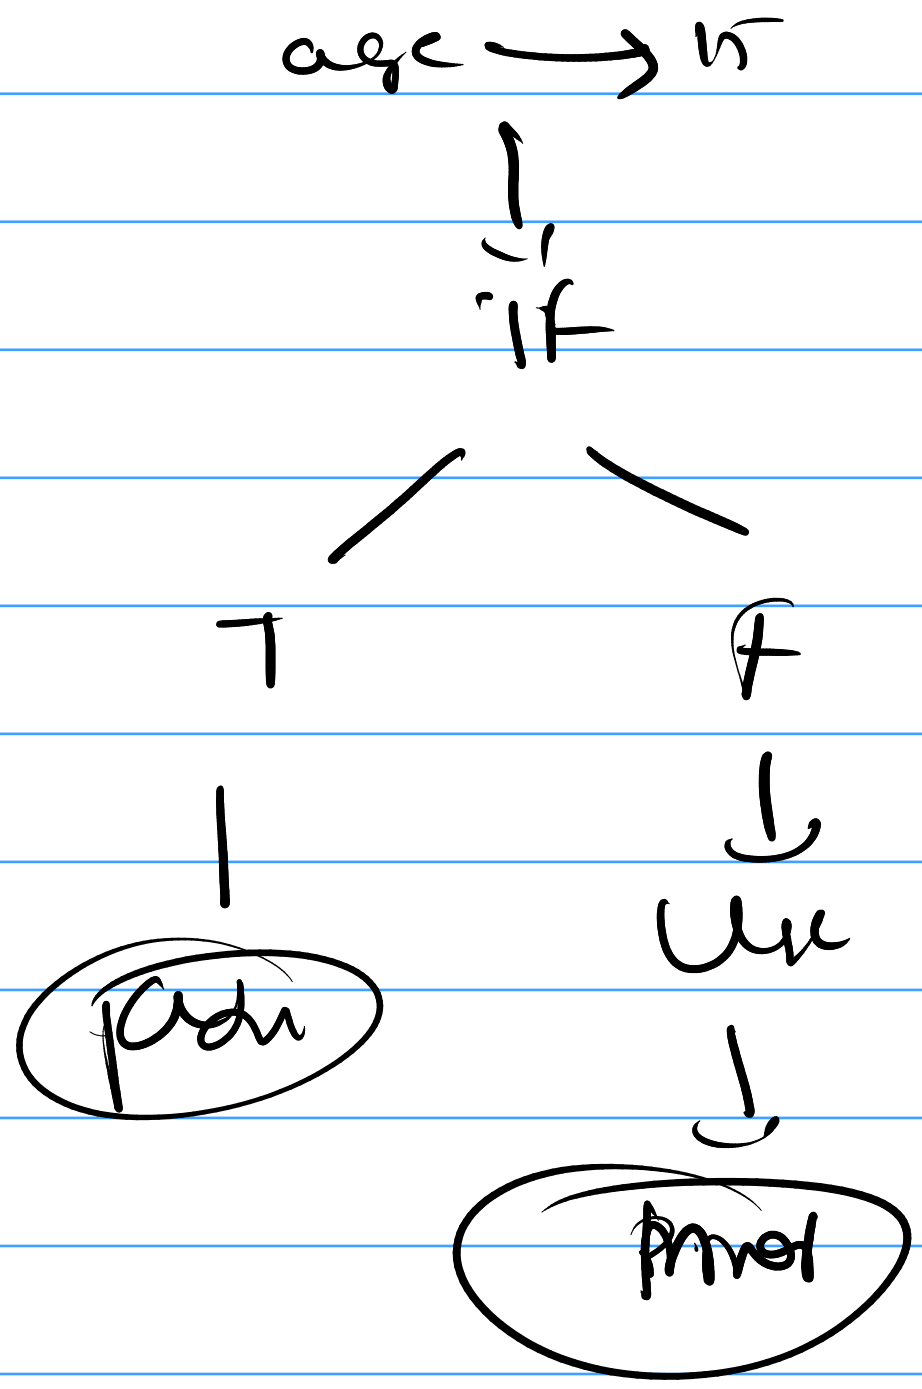

if else-elif

-> ~~more~~ more than Two condition (if else elif) →

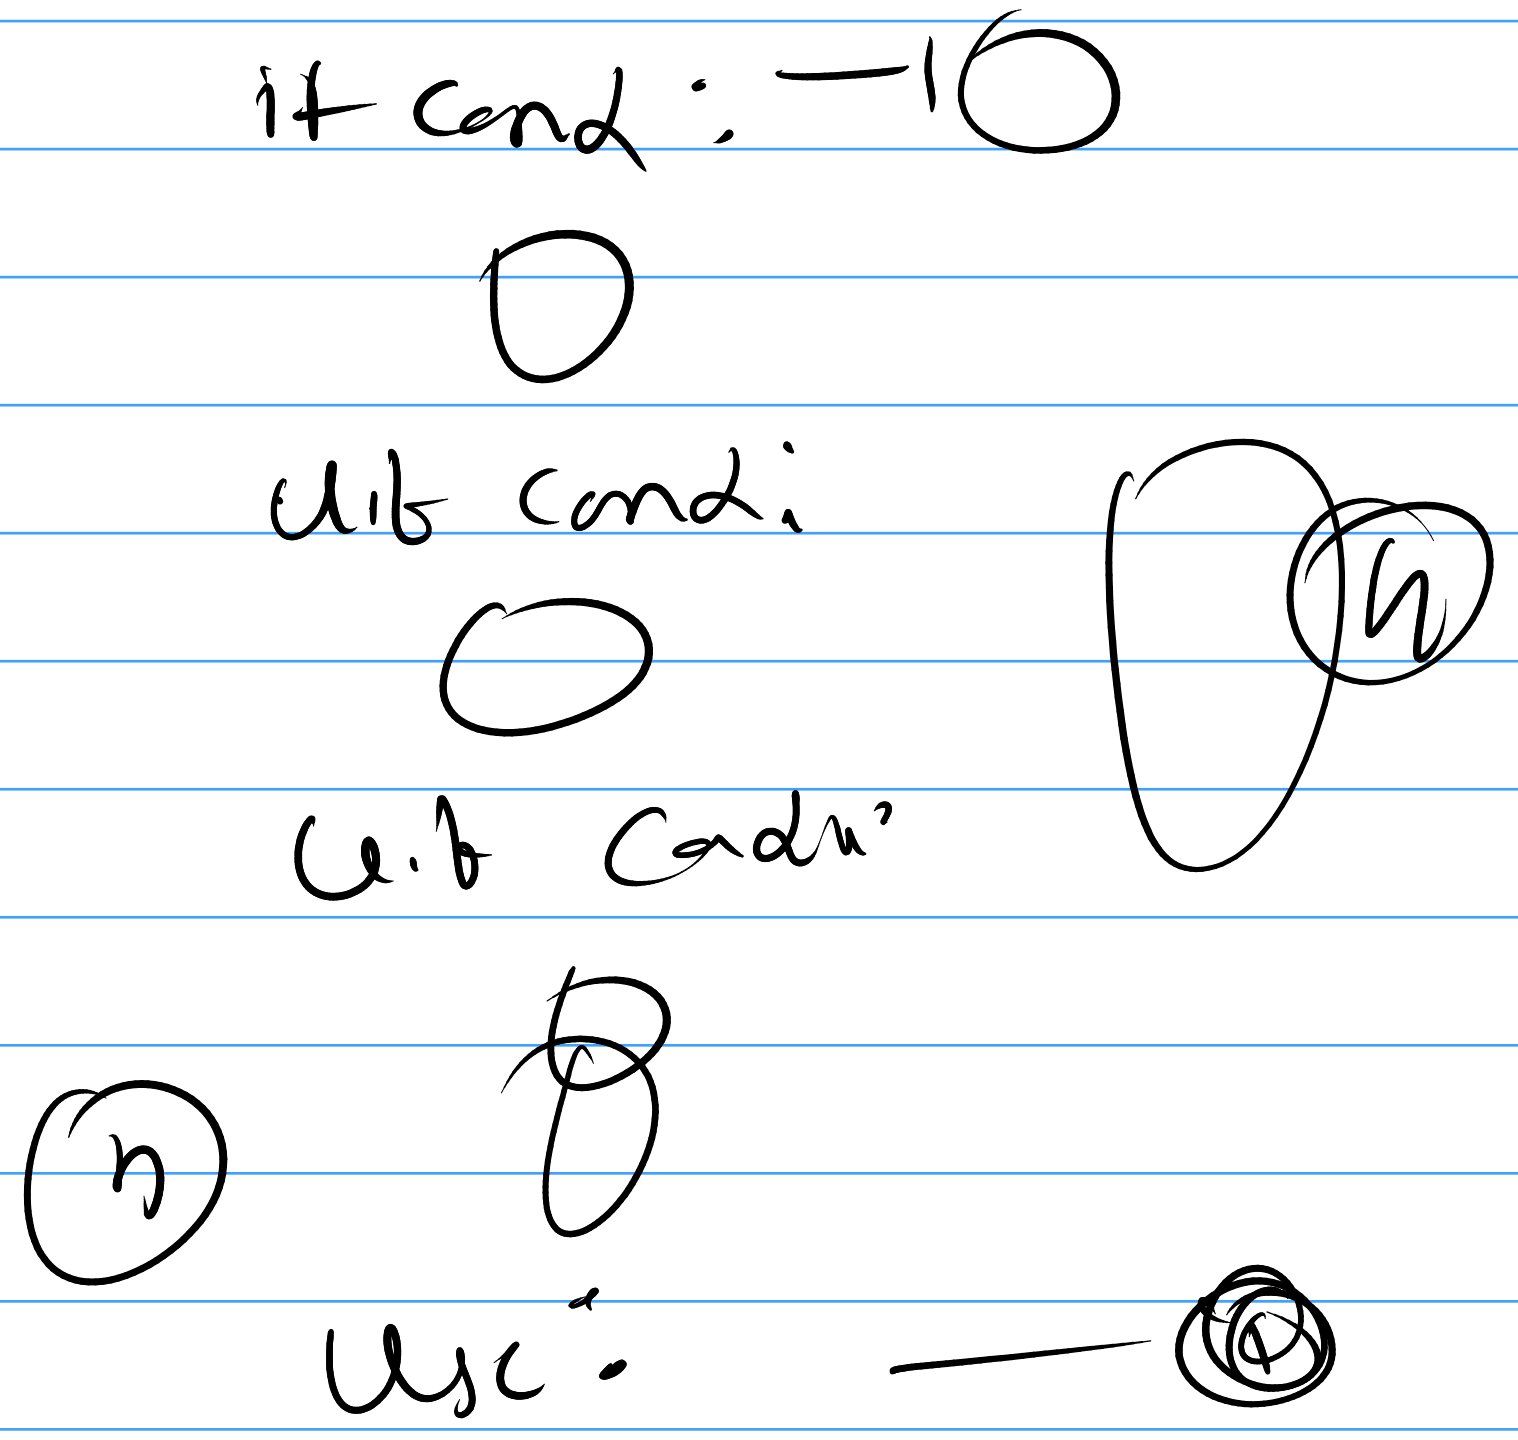

```
if cond : —
elif cond:
elif cond:
else: —
```

```
marks = 85
if marks>=90:
    print('A'
elif marks >=80:
    print(B)
elif marks >=70:
    print('C')
else
    print('fail')
```

multiple if condition :

```
x = 10
if x > 5 :
    print 'A'
if x > 8
    print ('B')
if x > 9 :
    print ('C')
if x > 11 :
    print (D)
```

each if statement different

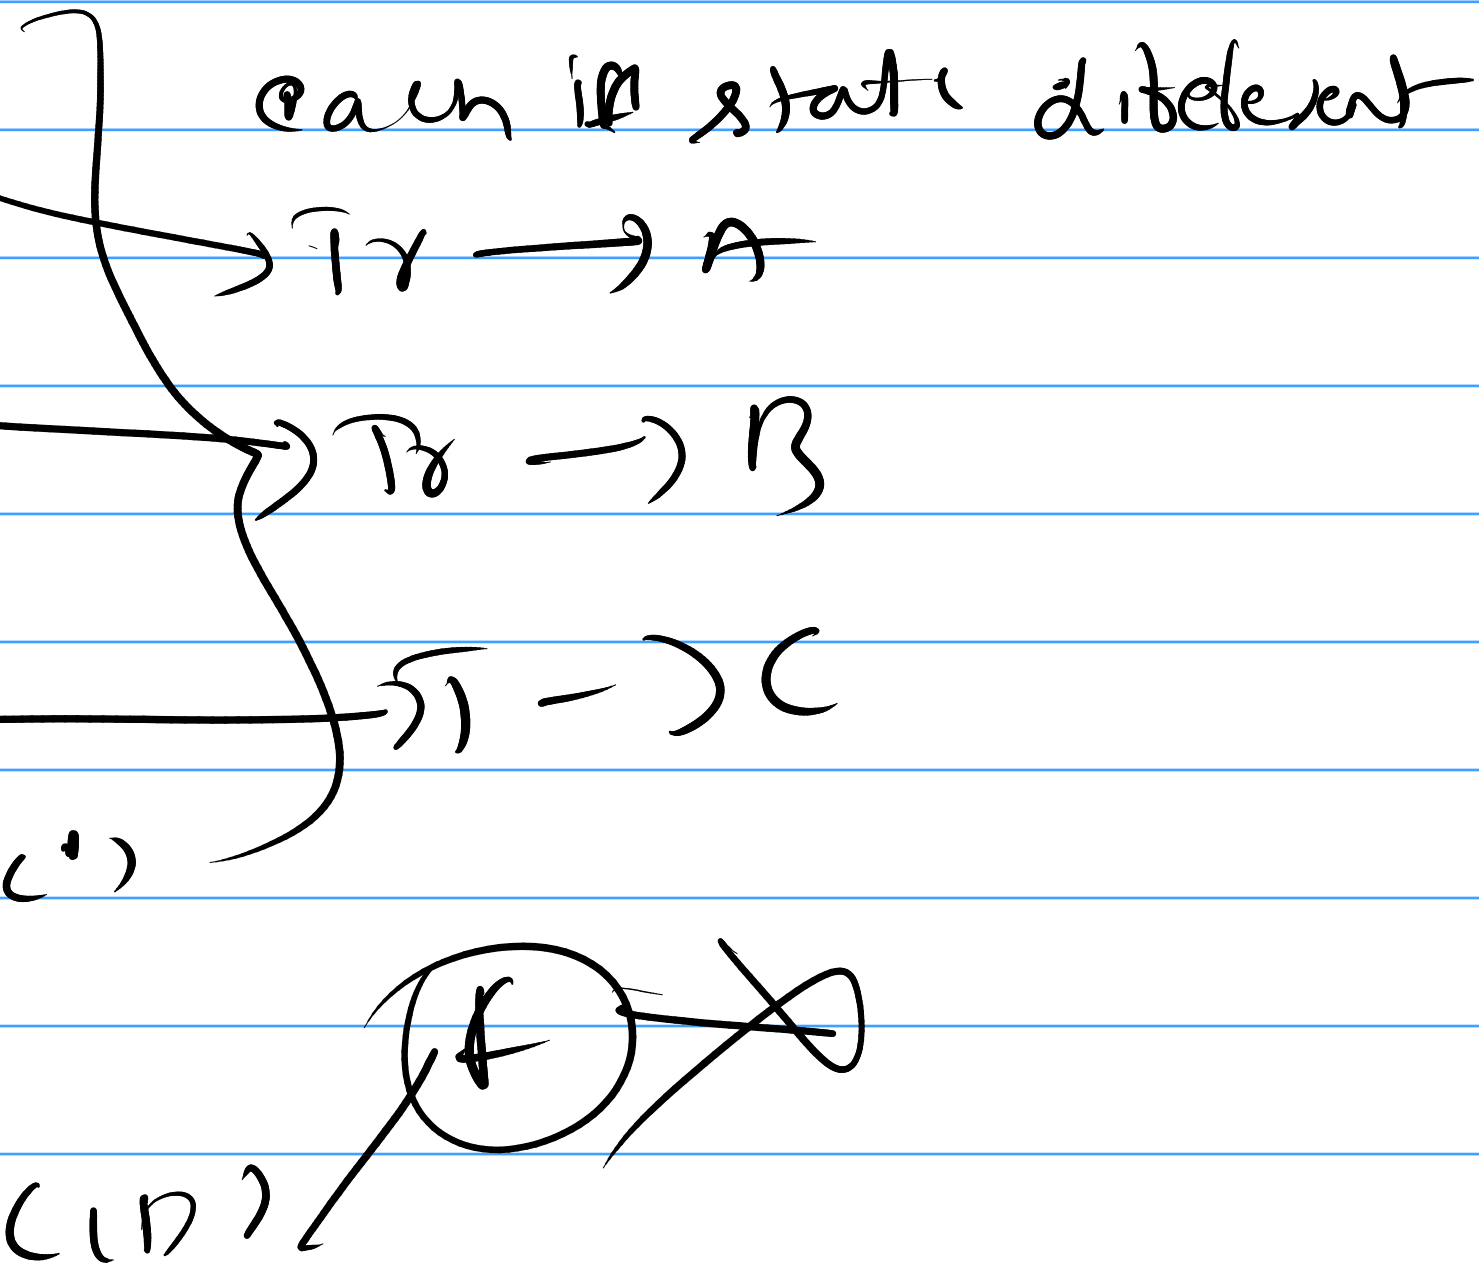

Nested if

```
age = 25
has_licence = True
```

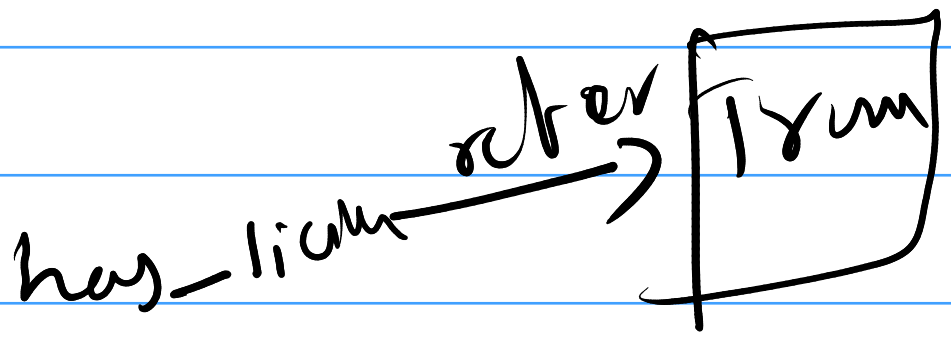

```
if age > 18 :
    if has_licence :
        print (your eligible licence)
```

if True

Base [illegible]

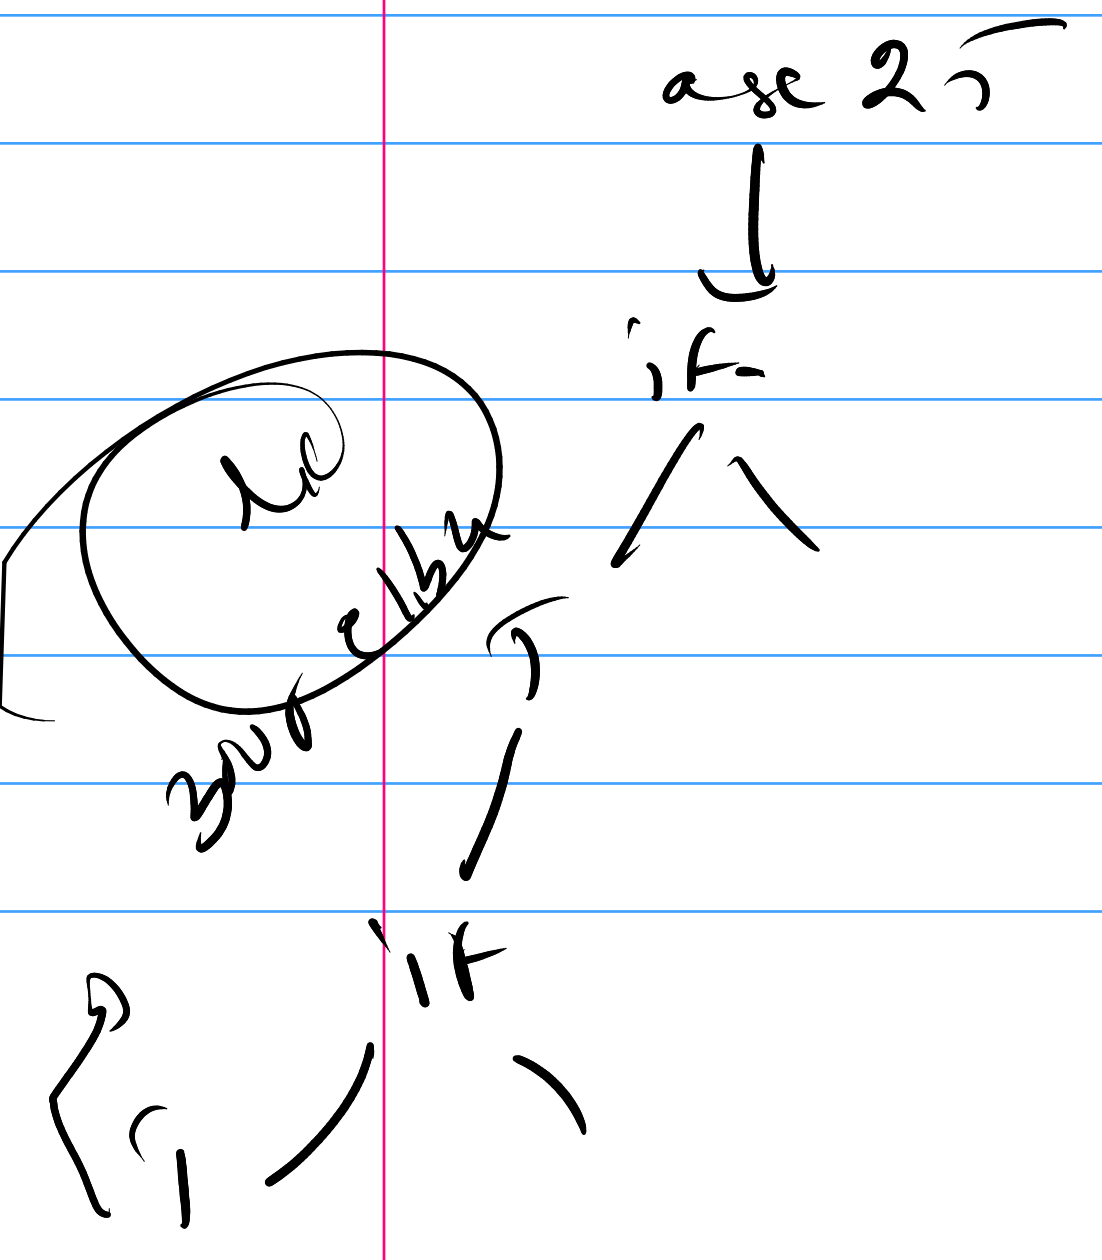

nste if else:

```
age = 20 18 15
has_licence = ~~true~~ ~~false~~
if age > 18:
    if has_licence:
        print("eligible")
    else
        print('non eligible')
else:
    print('young guys)
```

F

✓ True

~~[illegible]~~ false

→ Not eligib

your turn

18

combination of conditions:-

① and ② or ③ not

→ used to Combine the mutiple expressions in conditional statement

```
age = 25 18
has_licence = False
if age > 18 or has_licence
    print ('elligible driver')
else
    print ('not eligible')
```

T

T

eligible

has_licence = True
if not has_licence:
    print('A')

'if false

~~( )~~

has_licence = True

if no ~~[illegible]~~

if not True

'if false

match

→ 3.3.10 →

Day = "saturday"

match Day:

case "monday":

print()

→ pattern match, struct

→ match case

short hand if

a if age > 18: print("adult") else "saturday":

print("sat")

print("case")

S'atur

Ternary operator → short hand if else →

"adult" if age > 18 else "minor"

exp

cond

exp

[illegible]