



Permita a autenticação do usuário do grupo no serviço de SSH do Server linux com dia e horario para auth

Primeiramente você irá adicionar a policy no connection Request

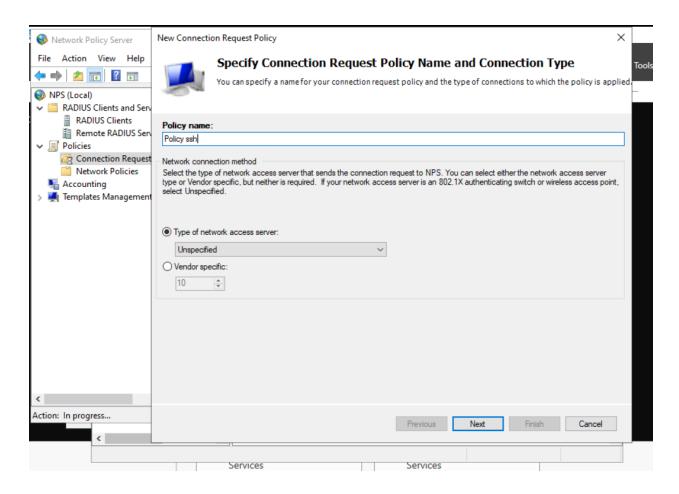


Selecione esse Client Friendly name, e coloque o nome do radius client, e clique em add

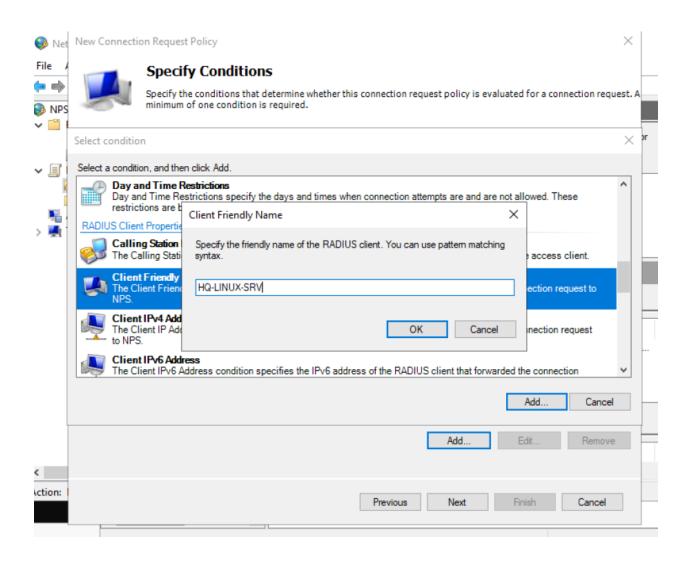


De next.


Nessa tela Selecione User-name:

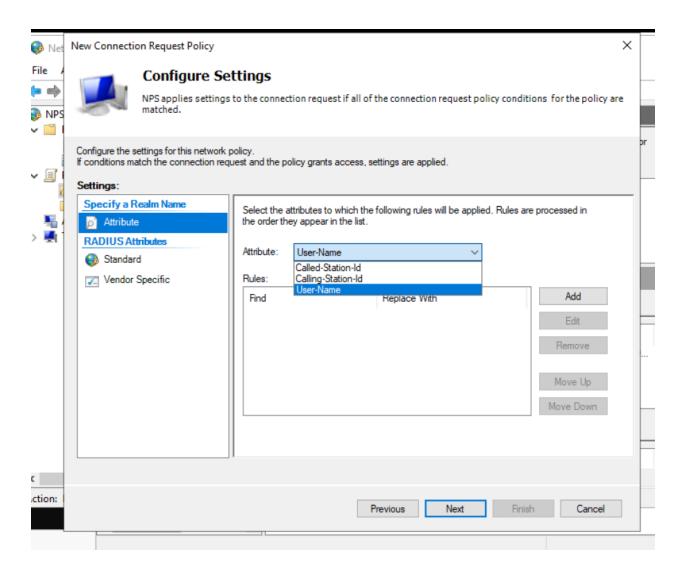


Agora em network Policy, adicione uma nova policy:

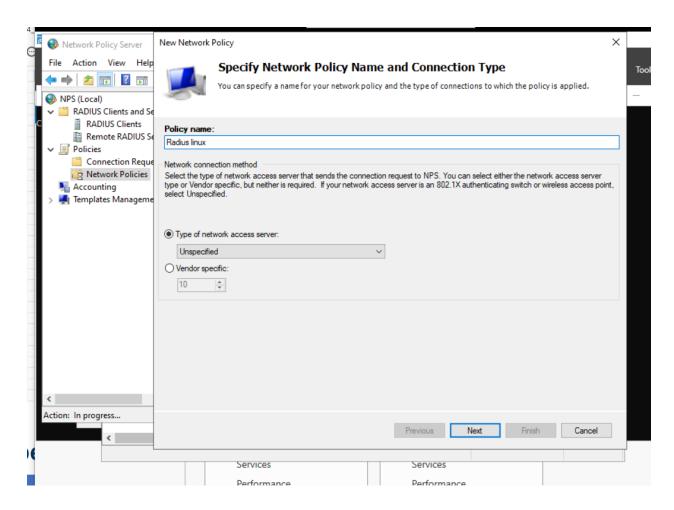


Adicione o user group:

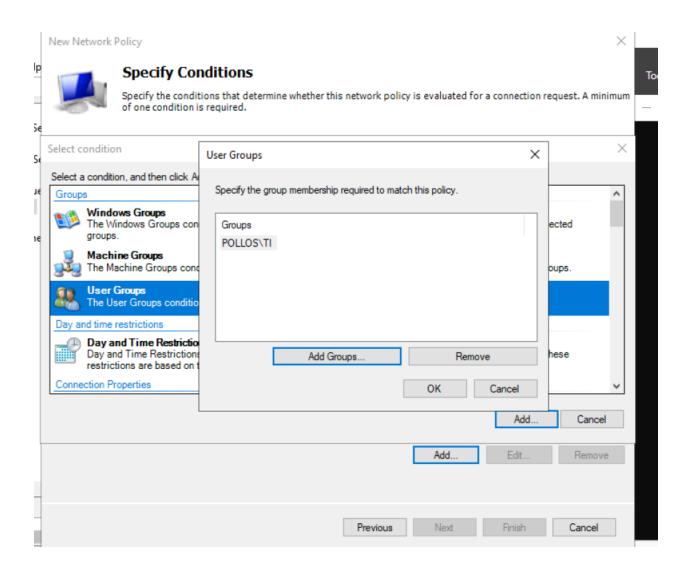

Adicione também a restrição de dia e horário

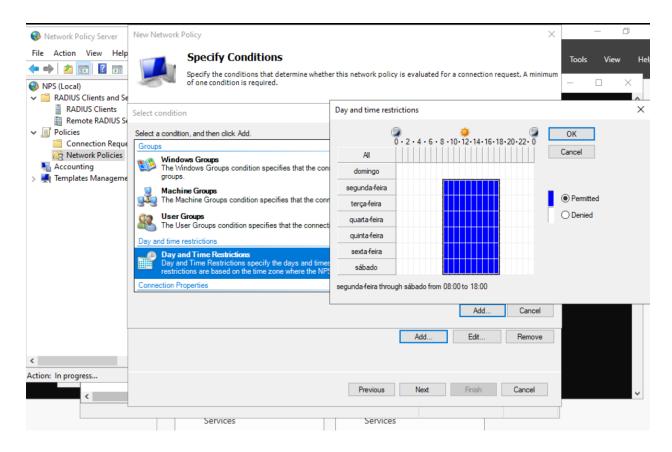


Marque unecrypted auth (PAP)

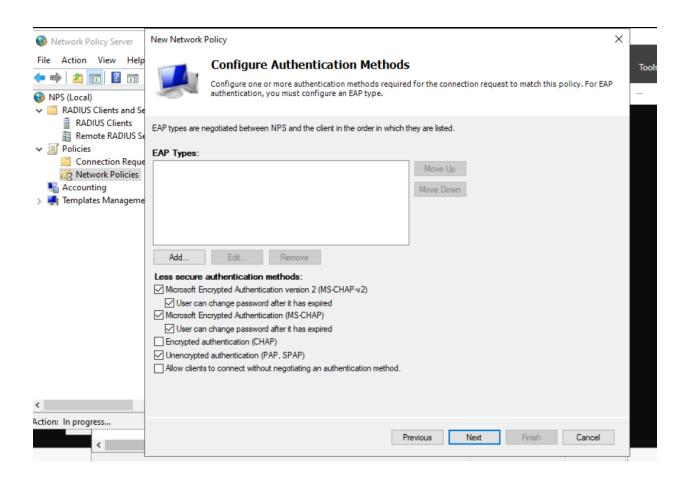


As próximas paginas deixe do jeito que está

ficará assim:

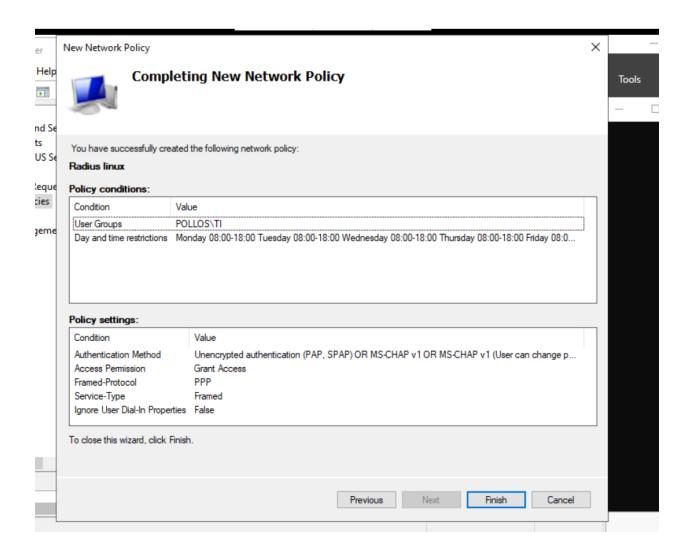

Agora vamos para o RedHat:

Adicione o user

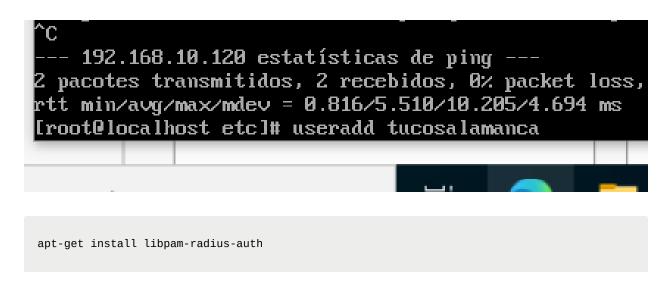

Access the Linux server and perform the RADIUS client configuration.

Install the required packages through the command below.

apt-get install libpam-radius-auth

▼!!!!!No red hat usa-se o yum!!!!!

yum install freeradius

```
Renel 5.14.0-162.23.1.e19_1.x06_64 on an x06_64

localhost login: root

Password:

Last login: Fri Aug 25 20:59:54 on tty1

[root@localhost ~1# yum install freeradius

Atualizando repositórios do Subscription Management.

This system is registered with an entitlement server, but is not receiving updates. You can use subscription-manager to assiquescriptions.

Red Hat Enterprise Linux 9 for x86_64 - AppS [ === ] --- B/s | 0 B --:-- J
```