Towards Trustworthy Retrieval Augmented Generation for Large Language Models: A Survey

BO NI, Vanderbilt University, United States
ZHEYUAN LIU, University of Notre Dame, United States
YONGJIA LEI, University of Oregon, United States
LEYAO WANG, Yale University, United States
YUYING ZHAO, Vanderbilt University, United States
XUEQI CHENG, Florida State University, United States
QINGKAI ZENG, University of Notre Dame, United States
XIN DONG and YINGLONG XIA, Meta Reality Labs, United States
KRISHNARAM KENTHAPADI, Oracle Health AI, United States
RYAN ROSSI and FRANCK DERNONCOURT, Adobe Research, United States
MEHRAB TANJIM, Adobe, United States
NESREEN AHMED, Cisco Research, United States
XIAORUI LIU, NCSU, United States
WENQI FAN, The Hong Kong Polytechnic University, Hong Kong
ERIK BLASCH, Air Force Research Laboratory, United States
YU WANG, University of Oregon, United States
MENG JIANG, University of Notre Dame, United States
TYLER DERR, Vanderbilt University, United States

Zheyuan Liu, Yongjia Lei, and Leyao Wang significant contribution.

This research is supported by the National Science Foundation (NSF) under grant numbers IIS2239881, IIS2524380, and IIS2524379.

Authors' Contact Information: Bo Ni, Vanderbilt University, Nashville, Tennessee, United States; e-mail: bo.ni@vanderbilt.edu; Zheyuan Liu, University of Notre Dame, Notre Dame, Indiana, United States; e-mail: zliu29@nd.edu; Yongjia Lei, University of Oregon, Eugene, Oregon, United States; e-mail: yongjia@uoregon.edu; Leyao Wang, Computer Science, Yale University, New Haven, Connecticut, United States; e-mail: leyao.wang@vanderbilt.edu; Yuying Zhao, Vanderbilt University, Nashville, Tennessee, United States; e-mail: yuying.zhao@vanderbilt.edu; Xueqi Cheng, Computer Science, Florida State University, Tallahassee, Florida, United States; e-mail: xueqi.cheng@vanderbilt.edu; Qingkai Zeng, University of Notre Dame, Notre Dame, Indiana, United States; e-mail: qzeng@nd.edu; Xin Dong , Meta Reality Labs, Redmond, Washington, United States; e-mail: lunadong@meta.com; Yinglong Xia, Meta Reality Labs, Redmond, Washington, United States; e-mail: yxia@meta.com; Krishnaram Kenthapadi, Oracle Health AI, Sunnyvale, United States; e-mail: krishnaram.kenthapadi@oracle.com; Ryan Rossi, Adobe Research, San Jose, California, United States; e-mail: ryarossi@gmail.com; Franck Dernoncourt, Adobe Research, San Jose, California, United States; e-mail: dernonco@adobe.com; Mehrab Tanjim, Adobe, San Jose, United States; e-mail: tanjim@adobe.com; Nesreen Ahmed, Cisco Research, San Jose, United States; e-mail: n.kamel@gmail.com; Xiaorui Liu, NCSU, Raleigh, North Carolina, United States; e-mail: xliu96@ncsu.com; Wenqi Fan, The Hong Kong Polytechnic University, Hong Kong, Hong Kong; e-mail: wenqi.fan@polyu.edu.hk; Erik Blasch, Information Directorate, Air Force Research Laboratory, Dayton, United States; e-mail: erik.blasch.1@us.af.mil; Yu Wang (corresponding author), University of Oregon, Eugene, United States; e-mail: yuwang@uoregon.edu; Meng Jiang (corresponding author), University of Notre Dame, Notre Dame, Indiana, United States; e-mail: mjiang2@nd.edu; Tyler Derr (corresponding author), CS, Vanderbilt University, Nashville, Tennessee, United States; e-mail: tyler.derr@vanderbilt.edu.



This work is licensed under a Creative Commons Attribution 4.0 International License.
© 2026 Copyright held by the owner/author(s).

ACM 0360-0300/2026/11-ART400
https://doi.org/10.1145/3837074

Retrieval-Augmented Generation (RAG) enhances AI-generated content by integrating external knowledge, improving relevance, and reducing hallucinations. However, RAG also introduces risks related to reliability, safety, privacy, fairness, explainability, and accountability, which impact trustworthiness. While various methods aim to address these concerns, a unified framework is lacking. This survey bridges that gap by presenting a comprehensive roadmap for trustworthy RAG systems. We provide a structured analysis of key challenges, existing solutions, and future directions across these aspects. We further organize the field around how the retrieval and generation stages and the six trustworthiness dimensions interact, demonstrating their synergies and trade-offs through a controlled cross-dimensional analysis. Additionally, we highlight downstream applications where trustworthy RAG can make a significant impact, encouraging further research and adoption in real-world AI systems.

CCS Concepts: • **Computing methodologies** → **Artificial intelligence**; **Natural language processing**.

Additional Key Words and Phrases: Accountability, explainability, fairness, large language models, privacy, reliability, retrieval-augmented generation, safety, trustworthy AI

ACM Reference Format:
Bo Ni, Zheyuan Liu, Yongjia Lei, Leyao Wang, Yuying Zhao, Xueqi Cheng, Qingkai Zeng, Xin Dong, Yinglong Xia, Krishnaram Kenthapadi, Ryan Rossi, Franck Dernoncourt, Mehrab Tanjim, Nesreen Ahmed, Xiaorui Liu, Wenqi Fan, Erik Blasch, Yu Wang, Meng Jiang, and Tyler Derr. 2026. Towards Trustworthy Retrieval Augmented Generation for Large Language Models: A Survey. *ACM Comput. Surv.* 58, 15, Article 400 (November 2026), 36 pages. https://doi.org/10.1145/3837074

1 Introduction

Retrieval-Augmented Generation (**RAG**) has emerged as a promising approach to address key limitations of **Large Language Models** (**LLMs**), such as hallucinations, outdated knowledge, and limited explainability [45]. By incorporating external information into the generation context, RAG improves accuracy, reliability, and keeps models up-to-date with minimal retraining. These benefits have profound implications for real-world applications, such as effectively being applied in medical **question answering** (**QA**) [171], legal document drafting [116, 168], and educational chatbots [151].

In 2022, the **National Institute of Standards and Technology** (**NIST**) published guidelines for trustworthy AI, defining trustworthiness across six dimensions: Reliability, Privacy, Safety, Fairness, Explainability, and Accountability [148]. While these principles apply broadly to AI systems, the multi-stage retrieval-augmentation-generation pipeline introduces unique challenges that demand RAG-specific reinterpretations of each dimension, as we elaborate below.

Reliability in general AI concerns consistent and accurate performance under varying conditions. In RAG systems, reliability must be evaluated across two interdependent stages: retrieval, where inconsistent or irrelevant passage retrieval can propagate errors downstream, and generation, where the model must faithfully ground its outputs in retrieved content rather than hallucinate [45, 80].

Privacy in general AI focuses on safeguarding personal data from unauthorized access. In RAG systems, privacy risks extend beyond model memorization to *corpus-level exposure*: the integration of external databases introduces additional leakage channels through which adversaries can extract sensitive documents via carefully crafted queries—a threat absent in standalone LLMs [188]. For example, a healthcare RAG assistant must guard against both direct extraction of patient records from its knowledge base and the inadvertent surfacing of sensitive details in generated responses.

Safety in general AI addresses harm prevention and robustness against adversarial actors. In RAG systems, the retrieval corpus itself becomes a first-class attack surface: malicious content injected into the knowledge base can hijack the generation stage, producing misinformation or harmful outputs even when the underlying LLM is otherwise well-aligned [37, 174, 187]. This risk is

distinct from conventional jailbreaking threats and requires dedicated corpus integrity safeguards, particularly in high-stakes deployments such as medication advising or legal consulting.

Fairness in general AI targets the mitigation of demographic biases in model outputs. In RAG systems, bias can compound across two stages: *retrieval bias*, where certain groups are underrepresented in retrieved passages, and *generation bias*, where the LLM amplifies these disparities in its final response [138]. Critically, retrieved content can inflate the model's confidence in biased outputs, making RAG-induced unfairness harder to detect than bias in standalone LLMs [58].

Explainability in general AI concerns the transparency of model decision-making. In RAG systems, explainability requires attribution across both retrieval and generation: users must understand not only *what* the system generated, but *which* retrieved passages caused it and *why* those passages were selected. This dual attribution requirement goes beyond token-level explanations sufficient for standalone LLMs, and remains a significant open challenge as retrieved information often influences generated responses in opaque ways.

Accountability in general AI encompasses governance, audit trails, and traceability of system decisions. In RAG systems, accountability is further complicated by the distributed pipeline: responsibility is shared among the retriever, the knowledge base curator, and the generator, creating accountability gaps when errors or harms arise.

Due to the importance of trustworthiness, a plethora of research has been developed to advance the application of RAG in LLMs. However, there is no systematic review of this area's current advancements and challenges. To organize the various perspectives, this survey formulates a systematic discussion on the state of trustworthy RAG in LLMs. Moreover, we recognize that trustworthiness in RAG cannot be understood one dimension at a time. RAG is a multi-stage pipeline where trustworthiness aspects are coupled across stages and dimensions; thus, an intervention targeting one property might affect another. We therefore structure our analysis around these interactions in Section 9 with a controlled cross-dimensional experiment, demonstrating the synergy and trade-offs across trustworthiness interventions. Finally, in Section 10, we ground these dimensions in high-stakes deployment domains, namely healthcare, legal, education, and enterprise, where we revisit how each trustworthiness dimension manifests in practice. The list of papers discussed is provided in the GitHub repository[1].

2 Preliminaries

This section introduces the RAG framework for LLMs and its common downstream tasks. While RAG also applies beyond language (e.g., image generation), we limit our scope to RAG in LLMs, sometimes called **Retrieval Augmented Language Models (RA-LLMs)** [36], and use RAG, RA-LLM, and RAG-based systems interchangeably.

2.1 Retrieval Augmented Generation

Figure 1 overviews the trustworthy RAG framework: a central three-stage pipeline (retrieval, knowledge augmentation, and generation) surrounded by the six trustworthiness dimensions examined in this survey, namely Reliability, Privacy, Safety, Fairness, Explainability, and Accountability, each shown with the key challenges and mechanisms that arise as it interacts with the pipeline.

Dense Retrieval. Given a query, the system first retrieves relevant context. Following [45], retrieval comprises *indexing*, where heterogeneous sources (e.g., PDFs, HTML, and Markdown) are chunked, embedded, and stored in a vector database, or a symbolic or relational database for tasks such as knowledge graphs (e.g., GraphRAG), and *retrieving*, where the query is vectorized or aligned to symbolic structures to fetch relevant chunks or nodes. *Knowledge augmentation* then incorporates

[1] https://github.com/Arstanley/Awesome-Trustworthy-Retrieval-Augmented-Generation

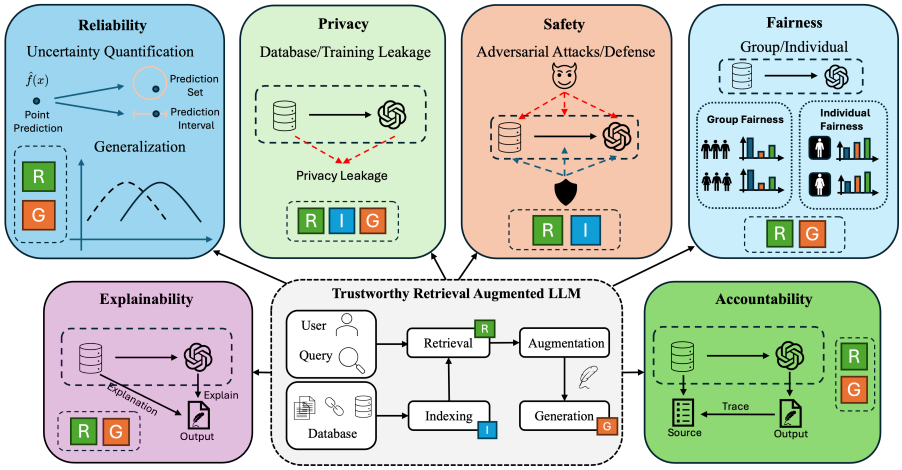


Fig. 1. An overview of the key components and dimensions of trustworthy RAG for LLMs that are covered in this survey.

the retrieved content into generation, often via prompt injection or fine-tuning, and the *generation* stage produces the final response.

Agentic Retrieval. Recently, agentic retrieval has emerged as a new paradigm in which an LLM-based agent decides *when*, *what*, and *how* to retrieve and integrate information across multiple reasoning steps [137, 182]. ReAct [182] merges reasoning traces with retrieval actions to refine queries from intermediate results; Reflexion [137] adds self-reflection on past failures; and Self-RAG [11] trains models to decide when retrieval is needed and to critique retrieved passages.

Scope of This Survey. We note that while this survey introduces both dense and agentic retrieval paradigms, the technical coverage in Sections 3 through 8 focuses primarily on dense retrieval settings, as the majority of existing trustworthy RAG research has been conducted in this context. Agentic retrieval introduces additional trustworthiness challenges beyond those of dense retrieval, such as error propagation across multi-step reasoning chains and the difficulty of attributing failures to specific retrieval decisions, and we identify these as important open directions for future work.

2.2 Common Tasks in RAG

The RAG paradigm has enabled a wide range of applications. We categorize the most common downstream tasks into two categories based on their interaction pattern: interactive tasks, where the system returns a response conditioned on a user query, and generative tasks, where the system produces a standalone artifact rather than a reply.

Interactive Tasks. In interactive tasks the system answers a user query, either in a single turn or across multiple turns. *QA* is one of the primary downstream tasks for RAG-based language models, where the system generates accurate answers to user queries using external retrieved context [93, 144]. *Dialogue* extends QA to multi-turn task-oriented and open-domain conversation, integrating external knowledge for more informed and up-to-date responses [4, 38].

Generative Tasks. In generative tasks the output is a produced artifact rather than a reply within an exchange. *Code Generation* retrieves documentation, code snippets, and issue histories to support program synthesis [22, 34]. Beyond code, RAG-based language models support generative recommendation [79], software engineering [57], and AI for scientific discovery [3].

Table 1. Comparison with Existing Surveys on RAG and Trustworthy LLMs

		Pillars of Trustworthiness											
		Reliability		Privacy		Safety		Fairness		Explainability		Accountability	
	Surveys	Uncertainty	Generalizability	External	Training Data	Jailbreaking	Defense	Retrieval	Generation	Retrieval	Generation	Retrieval	Generation
LLM	[87]	✓	✓	✗	✓	✓	✓	✗	✓	✗	✓	✗	✓
	[60]	✗	✗	✗	✓	✓	✓	✗	✓	✗	✓	✗	✓
RAG	[36]	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗
	[45]	✗	✓	✗	✗	✗	✓	✗	✗	✓	✓	✗	✗
	[197]	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗
	[106]	✗	✗	✓	✓	◐	◐	◐	◐	◐	✗	✗	✗
	[159]	✓	✓	✓	◐	✓	✓	◐	◐	◐	◐	◐	◐
	Ours	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

✓: LLM-focused survey without RAG emphasis; ◐: shallow coverage (e.g., mention in the future direction without dedicated discussion).
Column headers are colored by the meaning of trustworthiness each sub-dimension primarily engages (cf. Section 2.4): **M1** (trust challenges *introduced by* RAG) and **M2** (RAG *as a mechanism* to improve trust).

Trustworthy Evaluation. Comprehensive trustworthiness assessment requires metrics that capture bias, fairness, and reliability in generated answers. We introduce dimension-specific metrics in detail throughout the survey in their corresponding sections.

2.3 Motivation

Although trustworthiness has been studied in standalone LLMs, RAG systems introduce unique challenges. Their multi-stage pipeline—indexing, retrieval, and generation—can compound issues like hallucinations and bias, while reliance on external sources increases susceptibility to unreliable information. These distinctions limit existing framework utility. While prior works address individual concerns [33, 176, 188, 197], a unified overview is missing. This survey addresses that gap by systematically reviewing current efforts and outlining future directions for trustworthy RAG.

Related Surveys and Differences. As shown in Table 1, existing RAG surveys [36, 45, 106, 159] primarily focus on architectures, system design, and benchmarks, offering limited analysis of trustworthiness. Recent work discusses trust-related issues from architectural or system perspectives [159] or focuses on trustworthy empirical evaluations [197]. Meanwhile, trustworthy LLM surveys [60, 87] overlook retrieval-specific issues. In contrast, our survey provides a systematic review of RAG through six trustworthiness dimensions: Reliability, Privacy, Safety, Fairness, Explainability, and Accountability.

Paper Collection Methodology. We followed a systematic literature review methodology, searching *Google Scholar*, *ACM Digital Library*, and *arXiv* using combinations of primary terms (e.g., "RAG" and "trustworthiness") and dimension-specific terms (e.g., "RAG bias" and "RAG privacy attack"). Papers were included if they addressed trustworthiness challenges or evaluation protocols within RAG-based LLM systems. Forward and backward citation chasing was applied to recover works missed by keyword search. The search cutoff is July 2025, yielding a final corpus of nearly 196 papers. Our online repository is actively maintained with up-to-date papers.

2.4 Trustworthiness Definition

We note that the literature uses the notion of RAG trustworthiness in two distinct senses, which we make explicit to avoid ambiguity. First (**M1**), RAG introduces trust challenges that do not arise for a standalone generative model by including new attack surfaces including an external database and retrieval mechanisms. Second (**M2**), RAG can serve as a mechanism for improving trust, by directly grounding outputs in retrieved evidence or producing faithful explanations. Table 1 maps

each sub-dimension to the meaning it primarily engages through color, so the reader can situate each subsequent section accordingly.

3 Reliability of Retrieval Augmented Generation

While RAG improves factual consistency and adaptability, it also introduces unique reliability challenges. Unlike standalone generative models, RAG reliability depends not only on the underlying LLM but also the alignment of retrieved information. Ensuring reliability in RAG therefore requires evaluating both the retrieval process and the generation conditioned on the retrieved content.

3.1 Taxonomy of RAG Reliability

At a high level, reliability requires the system to perform as expected under various conditions. Previous work [155] defines reliability from three aspects: the ability to express *uncertainty* in predictions, the capability of *robust generalization* under various conditions, and the extent to which the model can *adapt* to new tasks. Since RAG is inherently *adaptable* because of the retrieved context, we will only consider *uncertainty* and *robust generalization* in our following discussion. We note that this taxonomy reflects one principled organizational choice; papers addressing multiple sub-dimensions simultaneously could reasonably be categorized differently, and we acknowledge this applies to the taxonomies presented throughout the survey.

3.2 Uncertainty

Uncertainty is a crucial factor for model reliability. **Uncertainty quantification** (**UQ**) helps quantify the confidence in the model's predictions, which is essential in high-stakes scenarios. Consider a medical chatbot where a patient inquires about their condition. If the model can express uncertainty in its responses, it significantly reduces the risk associated with its predictions. The patient can then make more informed judgments based on the confidence level of the information provided.

For a RAG system, UQ presents two primary challenges: First, during the generation phase, uncertainty stems from the inherent limitations of LLMs. Standard techniques for quantifying uncertainty in LLMs, such as **conformal prediction** (**CP**), can be applied here with few adaptations [183]. Second, uncertainty arises during the retrieval phase and its interaction with the LLM, introducing a more complex dynamics. The combination of retrieval and generation processes creates unique challenges for UQ, necessitating advanced methods to address the overall system complexity. The following section outlines ongoing efforts to tackle these challenges, with a summary of the relevant literature presented in Table 2. The Scope column of marks whether each method is RAG-specific (RAG) or a general LLM technique applicable to RAG's generator (LLM). Although LLM-specific methods can be directly applied to the downstream generation module, they address only the first challenge above; they remain agnostic to the retrieval stage and lack the joint calibration across retrieval and generation that the second, RAG-specific challenge demands. This scope distinction will be adopted throughout the survey for taxonomy tables.

3.2.1 Uncertainty Quantification in Generation. The generation phase in a RAG system is critically influenced by the UQ of LLMs. Recent studies have explored various approaches in this area, with a focus on techniques like CP—a model-agnostic, distribution-free method that uses a calibration set to estimate prediction confidence [135]. To apply CP, a *non-conformity score* is first defined to measure the confidence of a given prediction. Using a calibration set, the $1-\alpha$ quantile of the non-conformity score is then calculated, where α represents the user-defined error rate. Finally, the prediction set is constructed by selecting valid predictions based on the quantile score, ensuring that the set satisfies the $1-\alpha$ confidence level, assuming the calibration and test sets are exchangeable. Beyond CP, complementary approaches have explored confidence calibration and verbalized confidence elicitation for LLMs [46, 172], which estimate model reliability through calibration techniques such

Table 2. Taxonomy for Uncertainty Quantification in RAG

Module	Reference	Scope	White-box	Task	Year
Generation	Ye et al. [183]	LLM	✗	Benchmarking	2024
	Su et al. [142]	LLM	✓	Open Domain QA	2024
	Kumar et al. [74]	LLM	✓	Multiple Choice QA	2023
	Quach et al. [123]	LLM	✗	Open Domain QA	2023
	Wang et al. [165]	LLM	✗	Open Domain QA	2025
Retrieval + Generation	Ni et al. [104]	RAG	✗	Multi-hop QA	2024
	Li et al. [80]	RAG	✗	Open Domain QA	2023
	Soudani et al. [141]	RAG	✗	Open Domain QA	2026

The Scope column distinguishes methods designed for or evaluated specifically on RAG (RAG) from general LLM techniques that are applicable to RAG's generator but not RAG-specific (LLM).

as temperature scaling or by prompting models to self-assess their certainty; however, adapting these methods to the multi-component RAG pipeline remains an open challenge.

The cornerstone of CP lies in defining the *non-conformity score*. In traditional multi-class classification, a common approach is to use the softmax score of the from the class prediction. Extending the logit-based non-conformity score to LLMs, methods have been further developed. Typically, they assume white-box access to the model, making them unsuitable for commercial LLMs such as ChatGPT. For instance, Kumar et al. [74] applied standard CP to the Llama model [154] by leveraging softmax scores of token logits in multiple-choice tasks. Similarly, Ye et al. [183] extended logit-based approaches to multiple baselines and language models.

To compensate for the lack of application on black models, another promising direction is proposed for sampling-based techniques, where model confidence is estimated by repeatedly prompting the LLM. Quach et al. [123] adapted the learn-then-test risk-control framework [9] for LLMs, approximating the non-conformity score through sampling, which allows UQ in black-box models without direct logit access. Su et al. [142] further advanced these methods by introducing non-conformity measures that integrate both coarse-grained and fine-grained notions of uncertainty, leading to smaller, more refined prediction sets. Beyond constructing prediction sets, Wang et al. [165] propose COIN, a modular calibration framework that uses confidence interval methods such as Clopper–Pearson to establish high-probability upper bounds on the true error rate, enabling threshold-based selective prediction with provable false discovery rate guarantees under both white-box and black-box settings.

3.2.2 Uncertainty Quantification in Retrieval and Generation. As shown in Figure 1, a traditional RAG system includes multiple components from retrieval to generation. Due to its complex, multi-component nature, directly applying LLM-based UQ methods will produce less accurate, sub-optimal results [80, 130]. This necessitates the development of specialized techniques tailored to the unique structure and requirements of RAG models.

Recently, researchers proposed a multi-step calibration framework to enhance the retrieval process of RAG [130]. Specifically, this framework uses CP to quantify retrieval uncertainty, ensuring trustworthiness in RAG systems. The framework involves constructing a calibration set of questions answerable from the knowledge base and comparing their embeddings against document embeddings to identify the most relevant chunks containing the answers. By analyzing similarity scores and determining a cutoff threshold based on a user-specified error rate (α), the system retrieves all chunks exceeding this threshold during inference. This multi-step calibration ensures the true answer is captured in the context with a (1 - α) confidence level.

Moreover, TRAQ [80] expanded the CP framework to include a Bayesian optimization module that minimizes the prediction set during the multi-step calibration. Because of the complexity

of RAG, the constructed prediction set will be very large after aggregating the error rates of multiple components. By leveraging Bayesian optimization, the framework efficiently searches for the optimal parameters that reduce the size of the prediction set while maintaining the desired confidence level. TRAQ ensures that the retrieval process remains both accurate and computationally feasible, enhancing the overall reliability and performance of RAG systems.

Besides UQ in the process of document retrieval, **Uncertainty-Aware Graph Reasoning (UAG)** [104] attempted to address the gap in UQ of knowledge graph reasoning. Unlike vector databases, knowledge graphs encode knowledge as triplets and include structural information. One representative task of knowledge graph reasoning is multi-hop QA, where the system must infer answers by traversing multiple edges in the knowledge graph. The UAG framework involves combining information from several related entities and relationships within the graph, further complicating the process of UQ. UAG used a general risk control framework to find the optimal parameter for each stage of calibration, ensuring reliable uncertainty estimates while maintaining a reasonable prediction set size. Soudani et al. [141] further extended UQ to multi-step retrieval-augmented reasoning by perturbing reasoning chains to capture uncertainty propagated across both retrieval and generation.

3.3 Uncertainty Evaluation

Metrics. Traditionally, UQ is evaluated from two key perspectives: *coverage* and *efficiency* [55]. Recall that the goal of UQ is to ensure that the returned answer set satisfies a user-defined error tolerance of $1-\alpha$. Thus, the *coverage rate* measures how effectively the model meets this requirement.

Given a returned set of answers, $\mathcal{A}_{\text{ret}}$, and the correct answer set, $\mathcal{A}_{\text{true}}$, the coverage rate, C, is calculated as the proportion of instances where the correct answer is included in the returned set. Formally, $C = \frac{N_{\text{correct}}}{N_{\text{total}}}$, where N_{correct} represents the number of times the correct answer $\mathcal{A}_{\text{true}}$ is contained in the returned set $\mathcal{A}_{\text{ret}}$, $\mathcal{A}_{\text{true}} \subseteq \mathcal{A}_{\text{ret}}$, and N_{total} is the total number of instances. A model is considered reliable when $C \geq 1 - \alpha$. However, simply exceeding the threshold does not necessarily indicate optimal performance. Overestimating the returned set size while still satisfying the desired error rate implies inefficiency, as a smaller set could suffice for the same error rate. As a result, alongside coverage, *efficiency*, denoted as E, is another critical metric, often evaluated by the size of the returned answer set (i.e. the number of returned answers per question), i.e., $E = |\mathcal{A}_{\text{ret}}|$. Efficiency reflects the utility of the model's output, as larger sets may contain more irrelevant information, reducing their usefulness to the user. Thus, an efficient UQ process minimizes E while maintaining the desired coverage rate, C.

3.4 Robust Generalization

Previous work [155] defines robustness as the ability to make accurate estimates or forecasts about unseen events caused by out-of-distribution data, covariate shift, domain change, concept change, or population shift. In the context of RAG, the most significant robustness challenge is that the knowledge base itself is unreliable: as the database evolves it accumulates spurious, outdated, or factually incorrect content, so that even an accurate retriever returns harmful context. This is distinct from the standard retrieval-relevance problem in which an imperfect retriever surfaces off-topic passages from an otherwise clean corpus. We therefore focus on noise that originates in the corpus and arises organically as the database evolves, and we consider two aspects, distinguished by the quality of the offending content: resilience against irrelevant context, namely passages unrelated or only superficially related to the query, and resilience against corrupted context, namely passages carrying factually incorrect information. We further note a third type, adversarially constructed corrupted context; because of its adversarial nature we treat it under adversarial robustness in Section 5 (Safety).

3.4.1 Irrelevant Context. Fang et al. [37] considers the noise robustness of RAG with adaptive adversarial training. The paper explores three types of retrieval noises: (i) contexts that appear to be related to the query but do not contain the correct answer, (ii) contexts that are entirely unrelated to the query, and (iii) contexts that are thematically related to the query but include incorrect information. With the conclusion that type (i) and (iii) noise are the most misleading to the language models, the authors developed **Retrieval-augmented Adaptive Adversarial Training** (**RAAT**) to regulate the retrieval of noisy text. To improve the robustness under the noisy data, RAAT generates adversarial samples (noises) by considering the model's sensitivity to various types of noises and shows significant robustness improvement. The study further demonstrates that RAAT can be integrated seamlessly with existing RAG systems, enhancing their performance without substantial computational overhead.

In addition, Yoran et al. [187] further explores the negative impact of the retrieval of irrelevant context on the model performance. They argue that the negative impact of the irrelevant context is a result of the lack of training data with the retrieved passages. As a result, the brittleness to noisy passages is expected during inference. To address this observation, the author propose to finetune the language models on noisy contexts, which allows the model to learn to differentiate between useful and distracting information and minimize the negative effect of irrelevant context. Their experiment result on five open domain datasets has shown significant improvements of robustness against irrelevant context for both single-hop and multi-hop retrieval based QA.

3.4.2 Corrupted Context. Recently, Xu et al. [174] proposed a theoretical framework to explore the benefits and detriments of the RAG, in the situation where there's a discrepancy between the retrieved knowledge and the LLM knowledge. Specifically, they observed that the similarity between the RAG representation and the retrieved representation is bounded by the benefits and detriments, and the similarity is positively correlated with the value of benefits minus detriments. These results suggest that the similarities can be used as a proxy for the benefits and detriments of the RAG. Building upon the theoretical results, they further proposed an interactive inference framework X-RAG that leverages the benefit of both retrieved knowledge and LLM knowledge.

3.5 Robustness Evaluation

Metrics and Datasets. Robustness evaluation applies standard QA metrics (see Section 2.2) to noisy retrieval settings, with results reported as absolute performance tables [37, 174] or performance deltas relative to a clean baseline [187]. However, no widely adopted benchmark exists, so they adapt common QA benchmarks (e.g., TriviaQA) by injecting either randomly selected or heuristically filtered noise depending on whether the setting targets irrelevant or corrupted context [174, 187]. A recent step toward standardization is the benchmark of Fang et al. [37], which provides three types of retrieval noise per instance—relevant, irrelevant, and counterfactual—alongside a golden retrieval document, and we encourage future works to adopt it for standardized comparison.

3.6 Future Directions of RAG Reliability

Unified Uncertainty and Robustness Framework. Current approaches treat UQ and robust generalization as separate problems, yet in practice they are tightly coupled—noisy retrieved passages increase uncertainty, while miscalibrated confidence amplifies the impact of corrupted context. A concrete direction is to develop a joint framework that dynamically adjusts confidence scores based on retrieval quality signals, enabling RAG systems to simultaneously resist noise and communicate calibrated uncertainty to users. The discussion in Section 9 further demonstrates the potential synergy between reliability and robustness.

Adaptive Reliability under Knowledge Drift. External knowledge bases often evolve over time, yet RAG systems currently lack mechanisms to detect and adapt to such shifts. Drawing on advances

Table 3. Taxonomy for RAG Privacy

	Reference	Training	Tasks	Leakage	Year
Attack	Zeng et al. [188]	✓	Document Extraction and Training Data	Internal and External	2024
	Liu et al. [85]	✓	Membership Inference Attack	External	2024
	Cohen et al. [26]	✗	MIA and Document Extraction	External	2024
	Jiang et al. [65]	✗	IP Leakage (CopyBreakRAG)	External	2024
	Peng et al. [113]	✓	Document Extraction	External	2024
	Chaudhari et al. [162]	✗	IP Leakage (Benchmark)	External	2025
Defense	Zeng et al. [189]	✓	External Database	External	2024
	Zeng et al. [188]	✓	Document Extraction	External	2024
	Fu et al. [43]	✗	Membership Inference Attack	External	2026

in dynamic knowledge graphs [104, 145] and active learning, a promising direction is to develop distribution shift aware intervention mechanisms that flag outdated passages and trigger uncertainty escalation when retrieved content conflicts with model priors.

4 Privacy of Retrieval Augmented Generation

Although privacy risks in LLMs are well-studied, integrating external data in RAG introduces additional challenges. This section introduces the threat model for privacy leaks in RAG, discusses current mitigation efforts, and explores future directions for enhancing RAG trustworthiness.

4.1 Taxonomy of RAG Privacy

Table 3 summarizes work addressing privacy in RAG; we describe the relevant taxonomy below. Unlike UQ, privacy in RAG has been studied almost exclusively in the retrieval-augmented setting; we therefore omit the scope annotation for this section, as all surveyed works are RAG-specific.

4.1.1 Training. Training indicates whether attacks or defenses require *prior* data training. Approaches requiring training usually assume white-box access, allowing fine-tuning of RAG components. In contrast, methods without training often rely on prompt-based or zero-shot techniques.

4.1.2 Tasks. Current RAG privacy research involves four tasks: *Document Extraction*, *Membership Inference*, *Intellectual Property Leakage*, and *Training Data Extraction*. *Document Extraction* aims to retrieve confidential data (e.g., Personally Identifiable Information) from external databases. *Membership Inference* determines if specific passages exist in databases, potentially exposing sensitive data. *Intellectual Property Leakage* represents a distinct and higher-order threat: rather than targeting individual PII fields, adversaries aim to exfiltrate entire proprietary documents such as contracts or trade secrets. Lastly, *Training Data Extraction* explores leakage of sensitive information from the LLM's internal training data.

4.1.3 Leakage. Privacy leakage can originate from two sources: external retrieval databases and internal training data. External leakage involves exposing sensitive information from retrieved knowledge sources, while internal leakage occurs when LLMs inadvertently reproduce confidential training data. The following discussion is structured around these two aspects. These two aspects engage different senses of RAG trustworthiness in the sense of Section 2.4: external-database leakage is a risk that RAG introduces (M1), whereas the training-data setting illustrates how RAG can instead reduce leakage (M2).

4.2 Data Leakage From the External Retrieval Database

The goal of the attacker is to exploit privacy vulnerabilities within the retrieval dataset. Zeng et al. [188] introduced a composite structured prompt, formulated as q = information + command, which leverages the context retriever's propensity for similarity-based matching. However, a

significant limitation of this approach is its reliance on fixed queries, which cannot dynamically adapt to varying contexts. To address this limitation, Jiang et al. [65] proposed CopyBreakRAG, an agent-based black-box attack that begins with an initial adversarial query and iteratively refines it based on the model's responses, dynamically switching between curiosity-driven exploration and reasoning-based exploitation to progressively extract as many documents as possible from the retrieval database. Compared against PIDE [120], a structured prompt injection baseline, and DGEA [26], a grey-box method requiring direct access to the embedding model, CopyBreakRAG outperforms PIDE by approximately 45% and DGEA by approximately 25% in **chunk recovery rate** (**CRR**) under fully black-box conditions.

When considering white-box access to the model, Peng et al. [113] focused on data extraction through backdoor attacks. Their method trains a model to associate specific triggers with desired outputs. Beyond directly extracting documents, their approach also explores generating stealthy outputs using a language model to paraphrase the retrieved content, thereby increasing the difficulty of detecting the attack. Furthermore, Cohen et al. [26] demonstrated that these attacks can escalate beyond isolated cases. By crafting an *adversarial self-replicating prompt*, attackers can initiate a chain reaction that propagates through the entire RAG system.

Although distinct from direct extraction methods and based on a different threat model, *membership inference attacks* have also proven effective for data extraction. These attacks allow malicious users to infer whether specific content is present in the retrieval database. Liu et al. [85] introduced a mask-based attack that obscures portions of documents, compelling the language model to predict the masked words. Fu et al. [43] systematically compared the vulnerability of RAG and SFT against seven representative MIAs under a unified protocol, finding that RAG is generally more resistant since knowledge resides in an external index rather than in updated parameters.

4.3 Data Leakage From the LLM Training Data

The goal of the attacker is to extract data from the LLM's training and fine-tuning data that are encoded in the model parameters. In their paper, Zeng et al. [188] compared the effect of RAG in preventing data leakage from the LLM training data. The result shows that incorporating retrieved passages greatly reduces LLM's propensity to reproduce content memorized during its training/fine-tuning process. To isolate the effect of retrieval data integration, the author also attached 50 tokens of random noise injection as prefix. Although the random noise could also mitigate the data leakage, it is far less effective than integrating the retrieved content.

4.4 Intellectual Property Leakage

Beyond PII extraction, another privacy challenge is the extraction of proprietary documents from the retrieval corpus. Unlike PII attacks that target specific sensitive fields, IP leakage aims to reconstruct the knowledge base, enabling adversaries to obtain confidential organizational assets such as contracts and trade secrets. CopyBreakRAG [65] demonstrates this threat concretely, introducing an agent-based black-box attack that iteratively refines adversarial queries based on system feedback. Cohen et al. [26] further show that self-replicating prompts can escalate such attacks across an entire RAG system. A recent benchmark [162] confirms that IP leakage generalizes across diverse retriever and generator architectures, further emphasizing the need for dedicated defenses beyond PII extraction.

4.5 Defense on Privacy Attacks

Although still a relatively under-explored area, some works have proposed defenses to mitigate privacy vulnerabilities in RAG systems. In their foundational work, Zeng et al. [188] observed that using a separate model to summarize the retrieved documents effectively reduces privacy

leakage by abstracting sensitive information into generalized content. Additionally, they proposed implementing a distance threshold in the retrieval database, ensuring that only documents with certain relevance requirements are returned. However, this approach introduces a trade-off between system performance and privacy protection, as stricter thresholds can limit retrieval accuracy.

Building on these mitigation strategies, the authors further suggested the use of purely synthetic data as a way to entirely avoid potential leakage of real data [189]. This method involves identifying important attributes of the data through few-shot samples, extracting key information associated with these attributes, and generating synthetic data that mirrors the original data without exposing sensitive information. This approach has shown promise in effectively mitigating privacy leakage while maintaining the performance of the RAG system. Additionally, recent research [43] has explored LLMs as a post-hoc privacy mitigation for MIA attacks.

Metrics and Datasets. Privacy evaluation metrics quantify information leakage via token overlap volume, unique excerpts extracted, and ROUGE-L similarity between extracted and original content [188, 189]. For IP leakage specifically, CRR, **Semantic Similarity** (**SS**), and **Extended Edit Distance** (**EED**) jointly assess verbatim reconstruction fidelity at the corpus level [65]. However, no standardized benchmark currently exists; commonly used datasets include the Enron Email dataset [72], HealthcareMagic-101 [189], and domain-specific corpora simulating proprietary knowledge bases [65].

4.6 Future Directions of RAG Privacy

Domain-Specific Privacy Mechanisms. Current privacy defenses are evaluated on general-domain corpora, yet threat profiles sometimes differ substantially across domains. For example, re-identification from clinical notes in healthcare and leakage of privileged communications in law can have different implications in terms of model design. Future work should develop domain-adapted anonymization pipelines with sensitivity-based redaction at indexing time, evaluated on domain-specific benchmarks such as MedicationQA [15] and LegalBench-RAG [116].

Unified Privacy Evaluation Benchmark. Current evaluations focus narrowly on PII extraction, leaving IP leakage [65], membership inference attacks [43] and corpus reconstruction attacks undercharacterized. A promising direction is a unified RAG privacy benchmark covering these threat categories: direct extraction, PII inference, IP leakage, and membership inference.

5 Safety of Retrieval Augmented Generation

Recent studies have shown that LLMs are vulnerable to adversarial attacks [60, 88], such as prompt engineering and input perturbation. RAG systems, which combine LLMs with external databases, introduce additional safety risks. For example, attackers may inject adversarial content into retrieved data, bypassing safety alignment and producing malicious outputs [32]. As RAG adoption expands, especially in high-stakes contexts like education, ensuring safety becomes crucial to prevent harmful outputs. This section briefly summarizes adversarial attacks on RAG and highlights promising research directions to enhance RAG safety.

5.1 Taxonomy of RAG Safety

Table 4 summarizes existing RAG methods based on an adversarial taxonomy, briefly defined in this section. Although numerous attacks on LLMs (e.g., backdoor [91, 177], jailbreaking [167], and prompt injection [49]) primarily target the underlying LLM, the effect of retrieved contexts on attack surfaces remains unclear. Preliminary studies [188] indicate retrieval can mitigate simple attacks, but complex scenarios involving combined backdoor and retrieval attacks require further research. Due to space constraints, we omit detailed discussion of LLM-specific attacks (see [60, 87])

Table 4. Taxonomy for RAG Safety

	Reference	White-Box	Black-Box	Year
Targeted	Zou et al. [198]	✓	✓	2024
	Xue et al. [176]	✓	✗	2024
	Long et al. [89]	✓	✗	2024
	Zhong et al. [196]	✓	✗	2023
	Chang et al. [20]	✓	✗	2025
	Zhao et al. [194]	✓	✗	2025
Jailbreak	Wang et al. [166]	✗	✓	2024
	Deng et al. [32]	✗	✓	2024
	An et al. [7]	✗	✓	2025

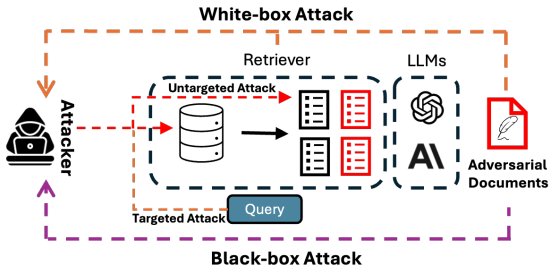


Fig. 2. An illustration of the RAG safety threat model

and instead focus on the retriever's robustness and its interaction with the generator. Figure 2 provides an overview of the RAG safety taxonomy. Safety in RAG, like privacy, is studied almost entirely in the retrieval-augmented setting, as the attack surface is the retrieval corpus itself; we therefore omit the scope annotation.

5.1.1 Threat Model. We define the threat model based on three main RAG components: the external database, the output generator (the underlying language model), and the retriever. A realistic assumption is that attackers have write-only access to the external database, reflecting scenarios where users can upload documents to a database but cannot access all of the content. This presupposes a knowledge base, that is, shared or open, for example, a web-scraped corpus or a public wiki, in which content contributed by one party can later be retrieved to answer another user's query. Attackers typically have no detailed knowledge about the underlying language model, as commercial LLMs are usually proprietary black-box systems.

For the retriever, we differentiate between two threat scenarios. In the white-box setting, attackers have full access to the retriever's parameters, allowing sophisticated adversarial examples crafted by exploiting known weaknesses (e.g., misleading yet highly-ranked documents [198]). Conversely, in the black-box setting, attackers lack direct access and must indirectly infer the retriever's behavior by manipulating external data, relying solely on observing retrieval outputs [32].

5.1.2 Attacker's Goal. In traditional machine learning, attacks are typically categorized as targeted or untargeted. For generative models like RAG, we identify two corresponding categories: targeted attacks and jailbreak attacks. Targeted attacks aim to subtly manipulate responses to specific queries or topics, evading detection and potentially skewing sensitive information (e.g., influencing perceptions on political or social issues). On the other hand, jailbreak attacks broadly seek to bypass built-in safety constraints, provoking models to generate unsafe or inappropriate content.

5.2 Methods of RAG Safety

Targeted Attacks. Zou et al. [198] introduced PoisonedRAG, an attack exploiting the retrieval component by injecting carefully designed passages into the database. The goal is to manipulate RAG systems to produce attacker-specified answers to particular questions. PoisonedRAG considers both black-box and white-box scenarios. In black-box, where the attacker lacks access to model parameters, it uses a heuristic: passages closely matching the query are more likely retrieved. In white-box, with model parameter access, the passages are optimized to maximize similarity between the encoded query and passage: $P = \text{argmax}_{P'} Sim(f(Q), f(P'))$, where Q is the user query, P is the adversarial passage, f is the encoder, and Sim measures similarity. More recently, Chang et al. [20] further demonstrated that even a single poisoned document can achieve high **attack success rates** (**ASR**) under fully black-box conditions, while Zhao et al. [194] extended poisoning attacks to knowledge graph-based RAG by injecting adversarial triples that complete misleading reasoning chains.

However, PoisonedRAG targets specific queries, neglecting broader group-based attacks on semantically related query categories (e.g., political or social groups). To address this, Xue et al.[176] proposed the BadRAG framework, extending targeted attacks to semantic groups. For instance, given a topic such as *Republican*, BadRAG identifies related terms (*Governor*, *Red States*, and *Pro-Life*) as triggers. It employs contrastive learning to craft adversarial passages, maximizing similarity with triggered queries and minimizing it with normal queries. BadRAG also enables other adversarial behaviors, like **Denial-of-Service** (**DoS**) attacks[176], further exploring the vulnerabilities.

Dense retrieval has been extensively studied within the Information Retrieval community [195]. Many attacks on dense retrievers, such as adversarial manipulation, are also applicable to passage retrieval tasks. Recently, Long et al.[89] introduced a backdoor attack framework that exploits grammatical errors as triggers to spread misinformation. By employing contrastive learning to fine-tune the retriever, the model can retrieve adversarial passages specified by an attacker when it detects these grammatical anomalies. Additionally, Zhong et al.[196] demonstrated that adversarial passages trained on one domain can effectively transfer to out-of-domain queries, broadening the scope and potential impact of such attacks.

Despite these advances, their impact on downstream generation remains unclear, as most were developed without considering generation tasks. For instance, RAG methods equipped with safety guardrails could potentially diminish the impact of adversarially retrieved passages. Bridging this gap presents a key research opportunity in Trustworthy RAG (discussed in our Future Directions).

Jailbreak Attacks. When specific attack targets are absent, the threat model shifts toward jailbreak attacks. An et al. [7] has demonstrated that RAG can negatively impact LLM guardrails. Wang et al.[166] examine jailbreaking in the context of LangChain, a popular RAG framework. They analyzed jailbreak vulnerabilities in major Chinese LLMs and introduced the **Poisoned-LangChain** (**PLC**) method. By embedding jailbreak prompts into the retrieval database, PLC achieved jailbreak success across three scenarios, maintaining a consistent success rate exceeding 80%. More recently, Deng et al.[32] introduce Pandora, which extends jailbreaking attacks to English-based LLMs and more generalized RAG frameworks. Pandora enhances the malicious prompts by categorizing them into distinct topics and storing them in PDF format. This approach ensures that only titles and abstracts are retrieved, by which circumventing potential defense mechanisms that might detect the malicious content.

5.3 Safety Evaluation

Metrics and Datasets. Targeted attacks are evaluated from two perspectives: exclusivity, i.e., the proportion of adversarial passages retrieved for clean versus triggered queries across top-k

results [176]; and effectiveness, i.e., ASR using substring rather than exact matching to account for linguistic variation [198]. Jailbreak ASR requires manual labeling based on the relevance and quality of generated content [32, 166], which we identify as a methodological gap. No standardized datasets exist; targeted attack evaluations typically adapt QA benchmarks such as NQ [75], MS MARCO [14], and SQuAD [124], while jailbreak evaluations rely on manually curated adversarial questions grouped by theme, such as *Adult*, *Harmful*, and *Illegal* in Pandora [32], and *Dangerous Behaviors* and *Illegal Discrimination* in PLC [166]. The absence of unified benchmarks underscores the need for standardized safety evaluation frameworks for RAG systems.

5.4 Future Directions of RAG Safety

Safety in Structured and Multimodal Retrieval. Most safety research assumes text-based retrieval, yet emerging RAG systems are incorporating knowledge graphs [104] and multimodal sources [119]. They can require fundamentally different defenses than passage poisoning. Future work should develop modality-specific threat models and corresponding defenses for each retrieval source type.

RAG-Specific Adversarial Training. Current defenses such as token masking [176] predominantly operate at generation time, tuning the model to be robust against corrupted passages after retrieval. However, a more proactive direction is to develop retrieval-time adversarial training that prevents corrupted or poisoned passages from being retrieved in the first place. Concretely, this could involve training the retriever with contrastive objectives that explicitly penalize high similarity scores for adversarially crafted passages, effectively making the retrieval stage poison-aware before any content reaches the generator.

6 Fairness of Retrieval Augmented Generation

As generative models such as LLMs and image-generative models become increasingly integrated into real-world applications, it is critical to ensure fair outputs. RAG systems combine generative models with external knowledge retrieval, providing improvements in accuracy and relevance by incorporating up-to-date information. However, the external data retrieved by these models may contain societal biases due to biased pre-trained knowledge [16], which leads to biased outputs. This also introduces the risk of amplifying disparities in gender, race, and other demographic attributes, particularly when the retrieved data is drawn from biased or unregulated sources. Figure 3 demonstrates how biased documents and retrieval can lead to biases in generation.

6.1 Taxonomy of RAG Fairness

In this section, we investigate various approaches that aimed at promoting fairness in RAG models. As shown in Table 5, ensuring fairness in RAG systems requires addressing biases at two stages: the retrieval of external data and the generation of outputs. These stages introduce unique fairness challenges, from biased data sources to unfair generative behavior, which need to be mitigated to create equitable and unbiased systems.

6.2 Fairness in Retrieval

One major challenge for fairness in RAG systems lies in the retrieval phase, where external knowledge or data used to enhance generation is sourced. Fairness issues during this stage can arise from various factors, including the retrieval model, the retrieval process, and the re-ranking mechanism. To address these challenges, several frameworks have been proposed to ensure that the retrieval system itself is fair. Reskabsaz et al. [127] introduces a framework for measuring bias that quantifies gender-related biases in ranking lists and assesses the impact of both BM25 and neural retrieval models. Furthermore, Reskabsaz et al. [126] investigates how re-ranking methods can mitigate biases present in initial retrieval results. Then, Wang et al. [164] recognizes a gap between fairness

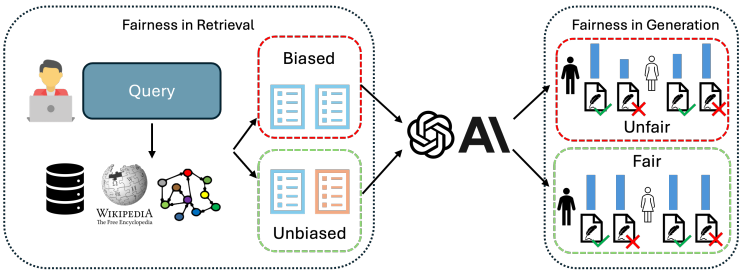


Fig. 3. An overview of the fairness challenge in RAG. The biased retriever includes content related to the blue sensitive attributes, and the biased language model generates unfair content based on protected attributes.

Table 5. Taxonomy for RAG Fairness

Module	Reference	Scope	Bias Mitigation	Focus	Year
Retrieval	Wang et al. [164]	LLM	LoRA Fine-tuning	Ranking Fairness vs. Performance	2024
	Shrestha et al. [138]	RAG	Diverse Sampling	Demographic Diversity	2024
	Rekabsaz et al. [126]	LLM	Re-ranking Methods	Societal Bias Mitigation	2021
	Rekabsaz et al. [127]	LLM	Post-hoc Re-ranking	Gender Bias in Retrieval	2020
Generation	Wu et al. [169]	RAG	Empirical Evaluation	Cross-task Fairness	2024
	Wang et al. [160]	LLM	Output Conditioning	GPT-3.5/4 Bias Detection	2023
	Liang et al. [82]	LLM	Representation Adjustment	Fair QA	2022
	Parrish et al. [112]	LLM	Benchmark Evaluation	Stereotype Analysis	2021
	Jeung et al. [64]	LLM	Benchmark Evaluation	Long-form Generation Bias	2025
Retrieval + Generation	Kong et al. [73]	LLM	**Post-hoc Bias Mitigation (PBM)**	Gender and Race Fairness	2024
	Kim et al. [69]	RAG	Fair Retrieval + Generation	Fairness-Quality Trade-off	2024
	Shrestha et al. [138]	RAG	Cross-Modal Guidance	Demographic Balancing	2024
	Hu et al. [58]	RAG	Fair Retrieval + Generation	Demographic Diversity	2025
	Bagwe et al. [13]	RAG	Backdoor Attack	Fairness Vulnerability	2025

The Scope column marks whether each work is RAG-specific (RAG) or a general technique applicable to RAG but not RAG-specific (LLM, covering general LLM and IR methods).

and ranking performance when using LLMs for re-ranking and proposes a method with LoRA. To ensure demographic diversity, FairRAG [138] incorporates external data sources that cover a broad range of age, gender, and skin tone categories. This approach uses post-hoc sampling techniques to debias the retrieval process, preventing disproportionate representation of specific demographic groups in the retrieved data. It differs in goal from the other methods: it treats fair retrieval augmentation as a mechanism for improving the fairness of generated outputs the ranking-debiasing approaches of Rekabsaz et al. and Wang et al. aim to remove bias that the RAG retriever itself introduces. Beyond addressing bias in the data itself, methods such as BadRAG [176] have shown how maliciously inserted or poisoned data in the retrieval corpus can lead to biased and unfair outputs. Bagwe et al. [13] further demonstrated that fairness vulnerabilities can be systematically exploited through BiasRAG, a two-phase backdoor attack that compromises the query encoder to align target groups with social biases. Kong et al. [73] proposes PBM, which balances retrieved image sets to ensure more equitable representation across gender/race.

6.3 Fairness in Generation

Once the data is retrieved, the next challenge lies in ensuring that the generative process itself is fair. Even with fair retrieval, generative models may introduce biases based on how the retrieved data is integrated. To promote fairness in generation, Liang et al. [82] assesses the accuracy of QA systems while accounting for fairness through measures of toxicity and representation bias. Similarly, Wang et al. [160] identifies the demographic imbalances in models like GPT-3.5 and GPT-4 under

both zero-shot and few-shot QA settings. FairRAG [138] employs conditioning techniques where generative models are guided by references that are demographically diverse. By incorporating external images or data from a wide range of demographic groups, these models produce more balanced and representative outputs. Parrish et al. [112] introduces the BBQ benchmark to evaluate biases in LLM-generated responses by examining the reliance on stereotypes and anti-stereotypes in both ambiguous and disambiguated contexts. Jeung et al. [64] extended bias evaluation to long-form generation, proposing LTF-TEST to measure demographic favoritism in LLM-generated essays and finding that bias persists in extended outputs. Next, to fully explore fairness throughout all stages and components of RAG pipelines, Wu et al. [169] conducts an empirically evaluation of fairness across various RAG methods. Similarly, Kim et al. [69] evaluates RAG systems with a fairness-aware retriever across seven different tasks and identifies the overall trend of fairness-quality trade-off, considering both retrieval and generation performance.

Metrics and Datasets. Fairness evaluation combines standard QA accuracy metrics—**Exact Match (EM)** [124] and ROUGE-1 [83]—with group-level fairness metrics. **Group Disparity (GD)** [42] measures performance differences between protected and non-protected groups, while **Equalized Odds (EO)** [53] assesses whether true positive and false negative rates are comparable across demographic groups. Retrieval-specific evaluations additionally report retrieval success rate and rejection rate to assess whether biases in retrieval propagate to generation [176]. Commonly used datasets include the TREC Fair Ranking Track [27], which evaluates fair exposure across demographics such as gender and location; the BBQ dataset [112], which tests model behavior under both ambiguous and disambiguated social contexts; and the LaMP benchmarks [131], which evaluate personalization fairness across classification, regression, and generation tasks via retrieval-augmented user interaction histories.

6.4 Future Directions of RAG Fairness

Multi-Objective Fairness-Utility Optimization. Existing work treat fairness and retrieval relevance as competing objectives, typically sacrificing one for the other. A more principled direction is to formulate RAG fairness as a multi-objective optimization problem—jointly optimizing fairness, accuracy, and relevance—using Pareto-efficient methods that expose the fairness-utility frontier, enabling practitioners to make informed trade-off decisions rather than fixed compromises [82, 160].

Multimodal Fairness. Finally, multimodal RAG systems that handle both text and image data raise new fairness concerns. Biases may emerge differently across modalities, and current research [69, 169] only begins to address this. Future work should ensure consistent fairness across modalities to build more trustworthy multimodal systems.

7 Explainability of Retrieval Augmented Generation

Explainability is a crucial aspect of trustworthiness, explaining model behavior and providing valuable insights for decision making [128]. Its importance has grown with the rise of black-box LLMs [82, 143]. While prior surveys [197] address transparency in RAG, our focus is distinct: While transparency is more general and seeks to understand the algorithms and underlying rationales, our explainability (of the output) specifically aims to elucidate why a particular input (transparency) leads to a given output through a specific model (interpretability).

As shown in Figure 4, RAG systems pose unique explainability challenges due to the complexity of their multi-stage nature. Beyond explaining the generation step, it is critical to understand the retrieval decisions—e.g., which input terms trigger the selection of specific contexts. In systems with post-retrieval processing [68, 179], further explanation is needed for how inputs influence reranking or filtering. This section reviews methods for explaining both the retrieval and generation components of RAG.

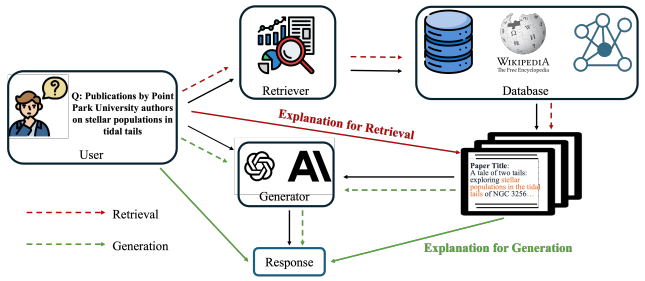


Fig. 4. An overview of explainability in RAG.

Table 6. Taxonomy for RAG Explainability

Module	Reference	Scope	Task	Year
Generation	Sudhi et al. [143]	RAG	English and German QA	2024
	Luo et al. [93]	RAG	Knowledge Graph QA	2024
	Rorseth et al. [129]	RAG	Open-book QA	2024
Retrieval + Generation	Kunze et al. [150]	RAG	Scene-Understanding	2024
	Hussien et al. [61]	RAG	Road User Intention Explanation	2024
	Ferraretto et al. [40]	LLM	Document Retrieval	2023
	Hu et al. [59]	RAG	Graph Extraction	2025

The Scope column marks whether each work is RAG-specific (RAG) or a general technique applicable to RAG but not RAG-specific (LLM).

7.1 Taxonomy of RAG Explainability

7.1.1 Explainability in Retrieval. As illustrated in Table 6, we situate our discussion of explainability in RAG in the distinction between retrieval, generation, and dual enhancement. To the best of our knowledge, no dedicated research efforts have been made to explain retrieval within the context of RAG. However, several studies have indeed explored explainability in the general information retrieval, particularly in recommender systems and search [191, 192]. Therefore, we provide a high-level summarization of representative explanation techniques in information retrieval, with the expectation of inspiring similar success in explaining the retriever of RAG.

Based on [8], the explanation methods in information retrieval can be categorized into post-hoc explanation, axiomatic strategies, probing strategies, and self-interpretable designs. The post-hoc explainers explain the models after they make decisions, the representative examples of which used in information retrieval are feature attribution and generative approach. The feature attribution works by ascribing the retrieved outcomes to certain input (i.e., the attribution). Some of the methods find the explanation features by computing the feature importance, such as [121] uses interpretable textual features to explain rankings, [118] understands the BERT-based ranking models by the attention scores of tokens, and [157] estimates the point-wise explanations by analyzing the contribution of each token to the output of the ranking model. Other methods try to explain the model outputs by finding the most explanatory features, e.g. [139] uses a greedy search-based algorithm to obtain a subset of features that serve as the explanations. Axiomatic explainers provide explanations using axioms [158] and probing explainers provide valuable insights into the inner workings of neural models by revealing what types of information are encoded in their embeddings and model parameters [25], how sensitive they are to various textual properties [95], and what knowledge they possess [41]. Although self-interpretable explainers inherently provide explanations by their designs, making the model fully transparent is extremely challenging, and usually, only specific components are interpretable and transparent [41, 193].

7.1.2 Explainability in Generation. Explaining the generator in RAG systems is as important as explaining the retriever since the final output is directly produced through generation. Errors in this stage can arise from shortcuts or reliance on misleading features [31], and LLM-based generators are particularly prone to hallucinations. This raises concerns about whether the model's output genuinely reflects the query-relevant content and retrieved evidence [59, 133, 143].

Explanation techniques for generation can be grouped into two main categories: post-hoc and ante-hoc. Post-hoc methods aim to interpret the generator after inference. For example, RAG-Ex [143] offers a model-agnostic, perturbation-based framework that measures how changes to input tokens affect the output. It proposes six types of perturbations (e.g., token removal, noise injection, entity or word substitutions), then ranks token importance based on the impact on generated responses. Among them, the "leave-one-token-out" strategy proves most effective at highlighting critical inputs. Another method, RAGE [129], generates counterfactuals to determine the provenance and salience of external knowledge used by the generator. It incorporates pruning strategies to reduce the search space, making the explanation process more efficient.

In contrast, ante-hoc methods incorporate explainability directly into the generation process. For example, RoG [93], leverages knowledge graphs to generate reasoning paths for each query, which provide intermediate steps that the LLM follows to arrive at an answer. This both enhances transparency and improves generation quality by encouraging structured faithful reasoning.

7.2 Dual Enhancement of Explanations and RAG

In addition to exploring how to explain RAG systems, existing work also investigated the dual enhancement of explanations and RAG. On the one hand, explanations can be integrated to augment RAG systems. On the other hand, RAG systems can also be employed to provide explanations.

As retrieval plays a critical role in RAG [28], the enhancement of adding explanations during retrieval could benefit the whole RAG system. ExaRanker [40] utilizes the explanations as additional labels to train the ranking models in the information retrieval task. Specifically, given the question-passage pair and the label indicating whether the passage can be used to answer the question, an LLM is first employed to generate the explanations of why the question can/cannot be answered by the given passage. With these ground-truth explanations, the ranking model is trained on question-passage pairs to predict not only whether the question can be answered but also the corresponding explanations. By integrating explanations as additional training labels, the ranking model can better understand the relationships between the questions and passages, which could benefit the ranking performance and ease the demand for a large number of training examples.

Apart from leveraging explanations to augment RAG systems, the reverse relationship—using RAG to improve explanations—is also worth exploring. For example, Tekkesinoglu and Kunze [150] use RAG in scene-understanding tasks to create explanations through a QA approach. For each input with a class label, the model predicts the probability of belonging to that class. To assess the impact of each semantic feature, it generates predictions without specific features, enabling the calculation of feature importance. These outputs, along with the contrastive cases, contribute to an external knowledge repository for LLMs. This RAG design can thus generate faithful explanations for the prediction model of the scene-understanding tasks. Another work [61] studying road user behavior also uses RAG to generate explanations. In particular, this work first creates a human-readable document that explains why the road user may/may not have a specific behavior. The document is then processed to form a database, serving as the external knowledge base of the RAG system.

Given a tailored prompt and a query derived from the prediction frame, the RAG system will create a detailed explanation of the road user's intention.

7.3 Explainability Evaluation

Metrics and Datasets. Explainability evaluation in RAG draws on conventional XAI metrics: *fidelity*, which measures how accurately an explanation reflects the model's decision-making process [5, 100], and *stability*, which assesses consistency across similar inputs [117]. For RAG-specific explanation evaluation, Sudhi et al. [143] propose *significance*, quantified via F1 and **Mean Reciprocal Rank** (**MRR**), and *plausibility*, assessed through human annotation against ground-truth token-level explanations. No standardized datasets exist; researchers adapt existing QA benchmarks such as XQUAD [143] and knowledge graph QA datasets WebQSP [184] and CWQ [149] for explainability evaluation [93]. The development of dedicated explainability benchmarks for RAG remains an important open challenge.

7.4 Future Directions of RAG Explainability

Knowledge Graph-Augmented Explainability. LLM-based graph traversal methods [66] introduce relational reasoning steps that traditional explanation techniques cannot capture. However, in real world, one knowledge graph might not fully capture the required context. One promising direction is to develop graph-based retrieval on multiple graphs where the retriever and generator jointly optimized to combine multiple knowledge sources for better explainability.

Domain-Aware Explainability Metrics. Current explainability approaches focus on general QA, applying domain-agnostic metrics that measure consistency without accounting for domain-specific correctness. However, domain-specific applications require explanations that meet the verification standards of each field. For example, medical QA requires expert input and clinical evidence alignment, while legal QA demands traceability to specific statutes or precedents. Future work should develop domain-aware explainability metrics grounded in expert judgment, validated on benchmarks such as MedicationQA [15] and LegalBench-RAG [116].

8 Accountability of Retrieval Augmented Generation

Accountability in AI concerns whether outputs meet procedural and substantive standards and which entities are responsible when violations occur [33]. It is broad, spanning governance, audit logging, responsibility assignment, and traceability of content to its origin. Watermarking addresses the traceability facet, which in RAG is the most acute and the most amenable to a technical solution: since responsibility is split across the retriever, the corpus curator, and the generator, tracing an output or passage back to its source is a prerequisite for assigning responsibility at all. By embedding verifiable, difficult-to-remove signals into generated text or corpus content, watermarking links outputs and data to a specific source model or dataset, enabling downstream auditing. We therefore focus on watermarking as the technical foundation of accountability in RAG, and treat the remaining, largely procedural facets (governance, audit infrastructure, and responsibility assignment) as open directions in Section 8.6.

8.1 Taxonomy of RAG Accountability

Retrieval. Accountability in this survey refers to embedding watermarks within the sources of retrieval, encompassing both Text Watermarking and Data Watermarking techniques. These approaches aim to safeguard content and data ownership, ensuring accountability and traceability.

Generation. Watermarking is key to ensuring accountability in LLM outputs, with strategies applied at different stages. Pre-generation embeds markers during training, in-generation integrates them during inference, and post-generation adds them after text is produced. Each method offers

Table 7. Taxonomy for RAG Accountability

Module	Reference	Scope	Technique	Type	Year
Retrieval	Liu et al. [84]	LLM	Format-based	Text Watermarking	2024
	Xu et al. [173]	LLM	Embedding-based	Data Watermarking	2024
	Sun et al. [147]	LLM	Trigger-based	Data Watermarking	2022
	Lv et al. [94]	RAG	Knowledge-based	Black-box Knowledge Watermarking	2025
Generation	Christ et al. [24]	LLM	Semantic-based	Sentence-level Watermarking	2024
	Hou et al. [56]	LLM	Sampling-based	Token-level Watermarking	2023
	Kirchenbauer et al. [70]	LLM	Logit-based	Global Watermarking	2023
	Yang et al. [181]	LLM	Post-generation	Lexical/Syntactic	2022
	Qu et al. [122]	LLM	Logit-based	Robust Multi-bit Watermarking	2025
Retrieval + Generation	Jovanovic et al. [67]	RAG	Integrated Pipeline	Red-Green Token Scheme	2024
	Guo et al. [52]	RAG	CoT-based	Reasoning Watermarking	2025

The Scope column marks whether a work is RAG-specific (RAG) or a general applicable technique but not RAG-specific (LLM). Most watermarking methods are general.

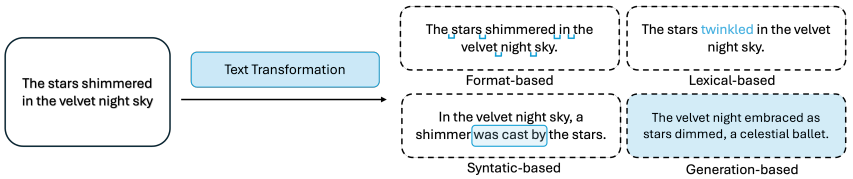


Fig. 5. Common text generation watermarking techniques.

distinct advantages, collectively enhancing traceability and authenticity. We summarize the RAG accountability taxonomy in Table 7.

8.2 Accountability in Retrieval

8.2.1 Text Watermarking. Text Watermarking embeds identifiable markers into textual content to authenticate ownership [84] (Figure 5). The dominant family is format-based watermarking, which alters only formatting rather than content: examples include line or word shifting [19], Unicode codepoint insertion such as whitespace [132], and variation in color, font, or embedded features [63, 97]. These methods preserve the original text but are vulnerable to removal via canonicalization [17] and to forgery, since their formatting patterns are detectable [84].

8.2.2 Data Watermarking. Data Watermarking protects a dataset or corpus, rather than a model's outputs, against unauthorized use. For example, a proprietary retrieval corpus or a curated training set whose owner wishes to detect whether it has been copied or used to train a model without permission. The watermark is embedded into the data and is later detected through the behavior of any model built from it. A common instance is backdoor watermarking [81]: the owner inserts trigger records, namely specific input patterns paired with unique target behaviors, into the dataset, so that a model trained on it responds to those triggers in a pre-specified, identifiable way.

Trigger-based watermarking is widely employed due to its flexibility and effectiveness as a type of backdoor watermarking. These triggers can take various forms, including word-level or sentence-level modifications [147], semantically invariant transformations in code [146], or distinctive input formats designed to be recognizable [173]. Embedding such triggers ensures that ownership can be verified through the model's behavior, even if the dataset itself is no longer accessible.

While trigger-based watermarking is robust, its effectiveness depends on careful design to ensure triggers remain inconspicuous yet detectable. Additionally, as models become more complex and versatile, challenges such as ensuring trigger persistence and avoiding unintended activations must

be addressed. As the field evolves, continued innovation in embedding mechanisms and detection strategies will be essential for robust and scalable dataset protection.

8.3 Accountability in Generation

Generation-stage watermarking embeds markers at different points in the model lifecycle. Specifically, pre-generation, in-generation, and post-generation. We discuss each in more details in the following paragraphs.

Pre-generation. Markers are embedded during training. *Trigger-based* watermarking (Section 8.2.2) reveals ownership only on specific inputs, minimizing impact on normal outputs but limiting detection in broad use. *Global* watermarking instead marks all outputs for pervasive traceability by distilling the signal into model parameters, via sampling-based or logit-based distillation [50] or reinforcement learning from watermark-detector feedback [175], at the cost of careful imperceptibility design. A promising direction is hybrid schemes that combine specificity with global universality.

In-generation. Markers are injected at inference without altering parameters. *Logit-based* methods such as KGW [70] bias generation toward a hashed green-token list and detect via a z-score over green-token proportions; entropy-based weighting [92] and sliding-window methods [71] restore performance in low-entropy contexts such as code, and Qu et al. [122] give a provably robust multi-bit scheme resistant to copy-paste attacks. *Sampling-based* methods bias the token-selection seed [24], which is edit-sensitive, or partition the semantic space to survive paraphrasing [56].

Post-generation. Markers are added to finished text [84]. Beyond the format-based methods of Section 8.2.1, *lexical* watermarking substitutes words while preserving meaning, advancing from context-agnostic WordNet or Word2Vec methods [39, 153] to context-aware BERT infilling [181, 185]; *syntactic* watermarking alters grammatical structure such as clefting and topicalization [12, 152] but is language-dependent and can disturb fluency; and *generation-based* watermarking uses neural rewriters such as AWT [1], REMARK-LLM [190], and WATERFALL [77] to embed high-capacity watermarks while preserving naturalness.

8.4 Accountability in RAG Systems

WARD (Watermarking for RAG Dataset Inference) [67] introduces a unified approach to watermarking in RAG systems by embedding imperceptible signals into datasets to enable traceability through both retrieval and generation, even after paraphrasing. Its red-green token scheme ensures statistically robust detection, resists content blending, and offers low false detection rates with scalable query aggregation. We recognize it as one of the first methods to provide tracking across both retrieval and generation stages in RAG. This marks a step toward accountable and transparent data usage in multi-stage RAG pipelines. More recently, RAG-WM [94] proposes a black-box knowledge watermarking approach that embeds entity-relationship tuples into the RAG knowledge base using a multi-LLM interaction framework, enabling IP infringement detection even when the adversary deploys the stolen knowledge base with a different LLM. Additionally, RAG^{C} [52] addresses harmless copyright protection by implanting watermark verification behaviors in the chain-of-thought reasoning space rather than the final output, using a pairwise Wilcoxon test for ownership verification while preserving the correctness of the RAG system's responses.

8.5 Accountability Evaluation

Metrics and Datasets. Watermarking evaluation spans five dimensions [84]: *detectability*, assessed via z-scores or p-values for zero-bit schemes and **Bit Error Rate** (**BER**) [185] or bit accuracy [186]

Table 8. Watermarking Datasets and Metrics

Dataset	Metric		
	Detectability	Quality Impact	Robustness
WaterBench [156]	✓		
WaterJudge [98]	✓	✓	
Mark My Words [115]	✓		✓
MarkLLM [107]	✓	✓	✓

for multi-bit schemes; *quality*, measured through comparative metrics such as BLEU [111] and SS, or single-text metrics such as **Perplexity** (**PPL**), with human evaluation as the gold standard; *output performance*, using PPL [185], GPT-4 scoring [35], CodeBLEU [51], and ROUGE [83] depending on task type; *diversity*, via lexical metrics such as Seq-Rep-N [50] and entropy-based metrics such as Ent-3 [56]; and *robustness* against adversarial transformations (see Section 5). Several benchmarks have been developed to standardize evaluation, including WaterBench [156], WaterJudge [98], Mark My Words [115], and MarkLLM [107], with details provided in Table 8.

8.6 Future Direction of RAG Accountability

Procedural Accountability. Watermarking establishes provenance, but full accountability in deployed RAG also requires audit infrastructure and clear responsibility assignment across the retriever, the corpus curator, and the generator. A concrete direction is to develop tamper-evident retrieval logs and per-component provenance records, together with policies that allocate responsibility when a harmful output traces to corpus content rather than to generation, extending accountability beyond the content-tracing techniques surveyed here.

Personalized Watermarking. Current watermarking schemes embed uniform signals regardless of user or deployment context, making it impossible to trace generated content back to a specific user session or retrieval query. A concrete direction is to develop personalized watermarking methods that embed user-specific or query-specific signals into generated outputs, enabling fine-grained attribution and supporting accountability at the individual interaction level.

9 Cross-Dimensional Quantitative Analysis

Although each trust dimension has its own challenges and metrics, improving one may come at the cost of another. To study these interactions, we apply one trust-oriented intervention at a time and measure its impact across all six dimensions against a naïve RAG baseline.

9.1 Experimental Setup

All experiments use `Qwen3-4B-Instruct` [178] as the generator and `all-MiniLM-L6-v2` [125] as the retrieval encoder. The corpus consists of 800 documents encoded and indexed via cosine similarity over L2-normalized embeddings.

Datasets and Queries. We curate 700 queries spanning four source dimensions, with up to 50 queries per dimension evaluated per run. The **Reliability and Robustness** split contains 200 factoid questions drawn from Natural Questions [75], each paired with a gold document and a noise-injected counterpart for robustness evaluation. The **Safety** split contains 100 harmful requests in the style of JailbreakBench [21], spanning categories such as violence, criminal planning, and self-harm. The **Fairness** split contains 200 ambiguous-context demographic questions following the BBQ benchmark [112], where the correct answer is "Cannot be determined." instead of the stereotype answer. Finally, the **Privacy** split contains 200 canary queries requesting PII (email addresses, SSNs) that appear in planted corpus documents. All queries are domain-agnostic and

designed to be answerable from short retrieved passages, ensuring that evaluation performance reflects pipeline behavior with the designed intervention. The corpus backing each split is indexed with the same dense retriever to provide a controlled retrieval environment across all trust dimensions.

Trust-oriented interventions. The **Reliability** intervention generates N answers and returns their union as a conformal-style prediction set [80, 104]. The **Safety** intervention wraps the pipeline with a Llama Guard-style dual-layer classifier [62] that screens both queries and responses against unsafe categories. The **Fairness** intervention reranks retrieved documents via round-robin selection for diverse provenance and injects bias-aware instructions for demographic queries [138]. The **Privacy** intervention applies PII scrubbing to both queries and retrieved documents using the Presidio NER engine [188]. The **Robustness** intervention filters retrieved documents by intra-document coherence (mean pairwise cosine similarity of sentence embeddings), dropping noise-corrupted documents below a threshold [161]. The **Accountability** intervention embeds a KGW statistical watermark during generation by biasing green-list token logits [70].

Metrics. As introduced in the individual sections, each dimension requires dedicated metrics for evaluation. To enable comparison among the dimensions, we normalize each dimension to a $[0, 1]$ scale. **Reliability** is computed as the average token-level F1 between the model response and reference answers, and **Robustness** applies the same token-level F1 metric to noise-injected retrieval contexts. **Safety** is the fraction of harmful queries for which the model produces a refusal, while **Fairness** is the fraction of ambiguous-context queries answered with an unbiased response (e.g., "Cannot be determined"). **Privacy** is reported as $1 -$ PII leakage rate, where leakage is defined as the presence of email addresses or SSNs in the response. **Accountability** is the fraction of responses in which the KGW watermark is successfully detected.


Evaluation Protocol. For each retrieval budget $k \in \{3, 5, 10\}$, we construct seven pipeline variants: the naïve RAG baseline plus one intervention-augmented pipeline per trust dimension. Every variant is evaluated on every query set. We report results as percentage-point change relative to the naïve baseline, i.e., $(\text{score}_{\text{intervention}} - \text{score}_{\text{baseline}}) \times 100$. Since all metrics share the same $[0, 1]$ scale, percentage-point differences are directly comparable across dimensions without the division-by-zero issues of classical percentage change. Aggregated results across all six metrics and retrieval budgets are reported in Figure 6.

9.2 Discussion

The cross-dimensional results in Figure 6 reveal that trust interventions do not operate in isolation: improving one dimension can either reinforce or undermine others. To organize these interactions, we categorize dimension pairs into three types: synergistic pairs, where one intervention incidentally benefits another dimension; antagonistic pairs, where gains in one dimension come at measurable cost to another; and neutral or asymmetric pairs, where interventions are largely independent.

Reliability: The reliability intervention negatively impacts safety and fairness by expanding retrieval coverage, increasing the likelihood that harmful or demographically biased content enters the context window. However, reliability exhibits a synergistic relationship with robustness: by aggregating multiple generations into a prediction set, the intervention increases the probability of producing a correct answer even when parts of the retrieved context are corrupted, effectively hedging against noise.

Safety: The safety intervention, which applies guardrails to the inputs and outputs guardrails, takes a conservative stance toward retrieved content and adopts a cautious approach to generation.

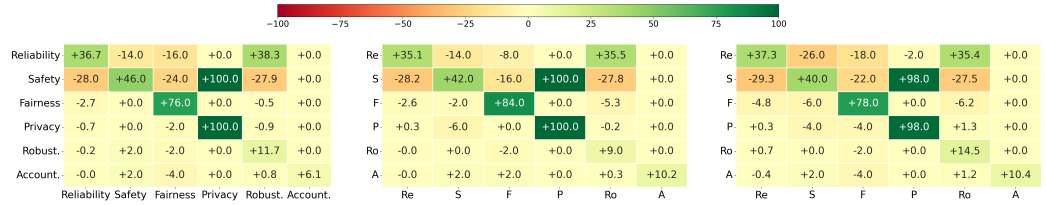

(a) Retrieval Budget $k = 3$ (b) Retrieval Budget $k = 5$ (c) Retrieval Budget $k = 10$

Fig. 6. Heatmap for the cross-dimensional experiment. The numbers represent the absolute point differences. The y-axis represents the intervention implemented, and the x-axis represents the trustworthiness metrics.

This conservatism has a negative impact on reliability, fairness, and robustness, as aggressively filtering retrieved documents can withhold factually useful context. The exception is privacy, where reduced content surfacing incidentally limits PII exposure. Practitioners should carefully consider this broad trade-off when deploying safety interventions in applications where reliability or coverage is also a priority.

Fairness: Similar to the safety intervention, the fairness intervention operates by filtering or reranking retrieved documents and injecting bias-aware generation instructions, which reduces the volume of available context. As a result, it shares many of the same antagonistic relationships as safety, negatively impacting reliability and robustness by withholding potentially relevant documents. Practitioners face a similar trade-off between equitable outputs and factual coverage.

Privacy: The privacy intervention, through PII scrubbing at both the query and context levels, exhibits a largely neutral effect on most dimensions, with the notable exception of safety, which benefits modestly from the reduced exposure of sensitive content. However, it is worth highlighting an unintuitive negative interaction with fairness: by redacting personally identifiable attributes (e.g., race or gender) from the retrieved context, the PII scrubber removes the demographic signals that the fairness intervention relies on to trigger "Cannot be determined," causing the model to revert to a standard generation that may reflect stereotypical associations. However, we note the effect is relatively small and may be specific to the fairness metric formulation used in our evaluation.

Robustness: The robustness intervention, which filters documents based on intra-document coherence, takes an additional inspection step over the retrieved corpus before generation. By discarding low-coherence documents, it inadvertently improves both safety and fairness, since adversarial, harmful, and demographically charged documents tend to exhibit similar incoherence signatures to noise-injected content. However, we caution that this synergy is not universal: it depends on the specific type of adversarial content present in the corpus and the particular robustness intervention employed. Coherence-based filtering may be less effective against subtly corrupted or well-formed adversarial documents that do not exhibit low intra-document similarity.

Accountability: The accountability intervention, which embeds KGW watermarks at the logit level during generation, has a largely neutral effect on all other dimensions. Because watermarking does not alter the retrieved context, the filtering pipeline, or the semantic content of the generated response, it is effectively orthogonal to reliability, safety, fairness, privacy, and robustness. This makes accountability one of the few interventions that can be freely composed with any other without introducing unintended cross-dimensional effects, suggesting it should be treated as a default component in trustworthy RAG deployments rather than a competing design choice.

10 Applications

In previous sections, we outlined the six dimensions of Trustworthy RAG systems. We now explore how these principles apply in high-stakes domains—Healthcare, Legal, and Education—highlighting recent advancements, current use cases, and domain-specific challenges.

10.1 Healthcare

In healthcare, RAG enhances multiple workflows. For *Clinical Decision Support*, RAG retrieves relevant medical documents and patient data to improve diagnostic and treatment recommendations [78, 171]. For *patient communication*, RAG-based chatbots address the growing demand for reliable online health information [54] by providing symptom assessments and personalized guidance. In *knowledge discovery*, RAG accelerates drug discovery and hypothesis generation by retrieving up-to-date literature and clinical trial data [180]. For *precharting*—reviewing patient records before visits [18]—RAG can improve efficiency through enhanced personalization [140, 180].

Trustworthiness Challenges in Healthcare. **Reliability:** Given the high-stakes nature of healthcare, RAG systems must be highly reliable. Integrating UQ into CDS and patient communication can help users assess output confidence [93, 104, 134, 144]. **Privacy:** RAG systems must prevent sensitive patient data leakage, especially in applications like precharting [18, 188]. **Others.** Beyond reliability and privacy, RAG systems must be safe, fair, explainable, and accountable. They should resist adversarial manipulation [47], avoid bias [54], offer transparent reasoning, and support traceability of errors.

10.2 Law

In legal applications, RAG supports multiple tasks. For *Legal QA*, RAG dynamically retrieves relevant statutes and precedents to provide contextualized responses about laws and case precedents across jurisdictions [2, 23, 76, 168]. For *Legal Document Summarization*, RAG can improve factual grounding by retrieving case law and legal commentary to produce more accurate summaries of long, technical documents [10, 23, 86]. For *Legal Judgment Prediction*, RAG retrieves similar precedent cases and applicable laws to enhance transparency and better reflect judicial reasoning, moving beyond early classification-based approaches [29, 170].

Trustworthiness Challenges in Legal Applications. **Fairness:** Biased retrieval can surface prejudiced precedents or omit underrepresented viewpoints, potentially contributing to unjust outcomes [138]. Targeted de-biasing and legal-specific retrieval strategies are needed [44]. **Explainability:** Legal professionals must trace how conclusions were reached. RAG systems must clearly indicate retrieved sources and their contribution to outputs [29, 90], though domain-specific explainability frameworks remain underdeveloped. **Others.** Like in healthcare, legal RAG systems must also be reliable, private, and accountable. They should remain accurate under ambiguous queries, protect confidential client records and sealed case documents, and support traceability of errors to maintain trust.

10.3 Education

In education, RAG enhances several workflows. For *personalized learning*, RAG dynamically retrieves content based on student progress and knowledge gaps, enabling more adaptive learning experiences beyond static approaches [101, 105, 163]. For *student support*, RAG-based assistants answer questions and clarify concepts in real time using updated, contextually relevant information [30]. For *teacher support*, RAG can assist with lesson planning and content generation using domain-specific resources [99], though further work is needed on high-quality educational datasets.

Trustworthiness Challenges in Educational Applications. **Fairness:** RAG systems may reinforce biases in training or retrieved data [136], leading to unequal treatment or content that disadvantages underrepresented groups. **Safety:** RAG systems are susceptible to adversarial attacks and jailbreaks [32, 167, 176], which is particularly concerning in educational settings where students may be exposed to misleading or inappropriate content. **Others.** Additional trustworthiness concerns include reliability, privacy, and robustness. Educational RAG systems must consistently deliver accurate and relevant content. They must also protect sensitive data like student performance and demographics. Robustness is needed to handle diverse learners, ambiguous inputs, and evolving educational goals while maintaining trustworthy performance.

10.4 Enterprise Applications

In enterprise settings, RAG supports diverse workflows. For *internal knowledge management*, systems help employees query policies, contracts, and institutional knowledge [4], as exemplified by Microsoft 365 Copilot [96] and Google Workspace [48]. For *customer-facing support*, RAG-powered chatbots provide context-aware responses grounded in product documentation [38], with platforms like PPL AI [114] popularizing web-grounded RAG at scale. For *personalized assistance*, RAG grounds responses in user profiles and interaction histories to tailor outputs to individual employees and customers [102, 103]. For *software engineering assistance*, RAG retrieves code snippets, documentation, and issue histories to support generation and debugging [57], with AWS Bedrock [6] enabling assistants grounded in proprietary codebases. RAG has also been applied to *public sector* e-government services, including virtual assistants for citizen engagement [108], multimodal public opinion analysis [110], and multi-agent GraphRAG for policy QA [109].

Trustworthiness Challenges in Enterprise Applications. **Safety:** A shared corporate corpus queried by many users means a single poisoned document can propagate adversarial effects at scale. PLC [166] demonstrates jailbreak attacks against widely adopted RAG frameworks, while Cohen et al. [26] show that self-replicating adversarial prompts can initiate a chain reaction that propagates through entire RAG systems, escalating both the scale and severity of data extraction. **Privacy:** RAG retrieves content by SS rather than authorization boundaries, creating pathways for unauthorized access. CopyBreakRAG [65] demonstrates that proprietary documents can be exfiltrated with high precision, highlighting that access control and retrieval authorization should be jointly optimized for semantic relevance and permission-aware filtering.

11 Conclusion

In this survey, we provide a comprehensive review of RAG systems through the lens of trustworthiness, focusing on six critical aspects: reliability, privacy, safety, fairness, explainability, and accountability. For each trustworthiness aspect, we introduce definitions and key concepts to establish an understanding of the topics. We also offer a structured taxonomy to help researchers navigate the diverse approaches in the specific trustworthy aspect. Beyond methodological summary, we highlight the evaluation protocols commonly used for trustworthy RAG systems, including the specific datasets and metrics. By including these discussions, we aim to facilitate the development of benchmarks tailored to trustworthiness challenges.

Additionally, we conduct a cross-dimensional analysis that reveals how the six trust dimensions interact and conflict within RAG's multi-stage pipeline. Unlike standalone LLMs, RAG systems compound trustworthiness challenges across retrieval and generation: retrieval bias amplifies generation bias, corpus-level attacks bypass LLM-level safety defenses, and accountability gaps emerge at the interfaces between pipeline components. These interactions also introduce unavoidable trade-offs. For example, improving explainability via source attribution can expose private corpus contents; enhancing retrieval diversity for fairness can introduce noisy passages that hurt

reliability, and safety defenses can reduce output accuracy. Recognizing these trade-offs is essential, as optimizing each dimension in isolation risks degrading others, and holistic trustworthiness requires pipeline-aware solutions that explicitly balance competing objectives.

Finally, we provide an in-depth discussion of future research directions for each aspect of trustworthiness, including promising directions within individual aspects and potential synergies across multiple areas. By addressing these directions, we hope to inspire innovative approaches that enhance the overall trustworthiness of RAG systems and drive their broader adoption in critical applications. This survey not only serves as a comprehensive roadmap for researchers aiming to advance trustworthy RAG systems but also underscores the importance of addressing these challenges to ensure the safe deployment of RAG applications.

References

[1] Sahar Abdelnabi and Mario Fritz. 2021. Adversarial watermarking transformer: Towards tracing text provenance with data hiding. In *2021 IEEE Symposium on Security and Privacy (SP)*. IEEE, 121–140.

[2] Wasi Ahmad, Jianfeng Chi, Yuan Tian, and Kai-Wei Chang. 2020. PolicyQA: A reading comprehension dataset for privacy policies. In *EMNLP 2020*. Association for Computational Linguistics, Online, 743–749.

[3] Microsoft Research AI4Science and Microsoft Azure Quantum. 2023. The impact of large language models on scientific discovery: A preliminary study using GPT-4. arXiv:2311.07361. Retrieved from https://arxiv.org/abs/2311.07361 (2023).

[4] Rama Akkiraju, Anbang Xu, Deepak Bora, Tan Yu, Lu An, Vishal Seth, et al. 2024. FACTS about building retrieval augmented generation-based chatbots. arXiv:2407.07858. Retrieved from https://arxiv.org/abs/2407.07858 (2024).

[5] Nourah Alangari, Mohamed El Bachir Menai, Hassan Mathkour, and Ibrahim Almosallam. 2023. Exploring evaluation methods for interpretable machine learning: A survey. *Information* 14, 8 (2023), 469.

[6] Amazon Web Services. 2024. Amazon Bedrock Knowledge Bases: Retrieval-Augmented Generation for Enterprise AI. Retrieved October 1, 2024 from https://aws.amazon.com/bedrock/knowledge-bases/

[7] Bang An, Shiyue Zhang, and Mark Dredze. 2025. RAG LLMs are not safer: A safety analysis of retrieval-augmented generation for large language models. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, Luis Chiruzzo, Alan Ritter, and Lu Wang (Eds.). Association for Computational Linguistics, Albuquerque, New Mexico, 5444–5474. DOI: https://doi.org/10.18653/v1/2025.naacl-long.281

[8] Avishek Anand, Procheta Sen, Sourav Saha, Manisha Verma, and Mandar Mitra. 2023. Explainable information retrieval. In *Proceedings of the 46th International ACM SIGIR Conference*. 3448–3451.

[9] Anastasios N. Angelopoulos, Stephen Bates, Emmanuel J. Candès, Michael I. Jordan, and Lihua Lei. 2022. Learn then test: Calibrating predictive algorithms to achieve risk control. arXiv:2110.01052. Retrieved from https://arxiv.org/abs/2110.01052 (2022).

[10] Anthropic. 2024. Legal Summarization - Claude Use Case Guide. Retrieved February 3, 2025 from https://docs.anthropic.com/en/docs/about-claude/use-case-guides/legal-summarization

[11] Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. 2023. Self-RAG: Learning to retrieve, generate, and critique through self-reflection. arXiv:2310.11511. Retrieved from (2023). https://arxiv.org/abs/2310.11511

[12] Mikhail J Atallah, Victor Raskin, et al. 2001. Natural language watermarking: Design, analysis, and a proof-of-concept implementation. In *Information Hiding: 4th International Workshop (IH 2001), Lecture Notes in Computer Science*. Vol. 2137, Springer.

[13] Gaurav Bagwe, Saket Sanjeev Chaturvedi, Xiaolong Ma, Xiaoyong Yuan, Kuang-Ching Wang, and Lan Emily Zhang. 2025. Your RAG is unfair: Exposing fairness vulnerabilities in retrieval-augmented generation via backdoor attacks. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, Christos Christodoulopoulos, Tanmoy Chakraborty, Carolyn Rose, and Violet Peng (Eds.). Association for Computational Linguistics, Suzhou, China, 15919–15937. DOI: https://doi.org/10.18653/v1/2025.emnlp-main.804

[14] Payal Bajaj, Daniel Campos, Nick Craswell, Li Deng, Jianfeng Gao, et al. 2018. MS MARCO: A human generated machine reading comprehension dataset. arXiv:1611.09268. Retrieved from https://arxiv.org/abs/1611.09268 (2018).

[15] Asma Ben Abacha, Yassine Mrabet, Mark Sharp, Travis R. Goodwin, Sonya E. Shooshan, and Dina Demner-Fushman. 2019. Bridging the gap between consumers' medication questions and trusted answers. *Studies in Health Technology and Informatics* 264 (August 21 2019), 25–29.

[16] Abeba Birhane and Vinay Uday Prabhu. 2021. Large image datasets: A pyrrhic win for computer vision?. In *WACV*.

[17] Nicholas Boucher, Ilia Shumailov, Ross Anderson, and Nicolas Papernot. 2022. Bad characters: Imperceptible nlp attacks. In *2022 IEEE Symposium on Security and Privacy (SP)*. IEEE, 1987–2004.

[18] CA Bowman and H Holzer. 2021. EMR precharting efficiency in internal medicine: A scoping review. *Journal of Medical Education and Curricular Development* 8 (Jul 2021), 23821205211032414.

[19] Jack T. Brassil, Steven Low, Nicholas F. Maxemchuk, and Lawrence O'Gorman. 1995. Electronic marking and identification techniques to discourage document copying. *IEEE Journal on Selected Areas in Communications* 13, 8 (1995), 1495–1504.

[20] Zhiyuan Chang, Mingyang Li, Xiaojun Jia, Junjie Wang, Yuekai Huang, Ziyou Jiang, Yang Liu, and Qing Wang. 2025. One shot dominance: Knowledge poisoning attack on retrieval-augmented generation systems. arXiv:2505.11548. Retrieved from (2025). https://arxiv.org/abs/2505.11548

[21] Patrick Chao, Edoardo Debenedetti, Alexander Robey, Maksym Andriushchenko, Francesco Croce, Vikash Sehwag, Edgar Dobriban, Nicolas Flammarion, George J. Pappas, Florian Tramer et al. 2024. JailbreakBench: An open robustness benchmark for jailbreaking large language models. arXiv:2404.01318. Retrieved from (2024). https://arxiv.org/abs/2404.01318

[22] Mark Chen, Jerry Tworek, Heewoo Jun, et al. 2021. Evaluating large language models trained on code. (2021). arXiv:2107.03374. . Retrieved from https://arxiv.org/abs/2107.03374 (2021).

[23] Zhiyu Zoey Chen, Jing Ma, Xinlu Zhang, Nan Hao, An Yan, Armineh Nourbakhsh, Xianjun Yang, Julian McAuley, Linda Petzold, and William Yang Wang. 2024. A survey on large language models for critical societal domains: Finance, healthcare, and law. arXiv:2405.01769. Retrieved from https://arxiv.org/abs/2405.01769 (2024).

[24] Miranda Christ, Sam Gunn, and Or Zamir. 2024. Undetectable watermarks for language models. In *Proceedings of the 37th Annual Conference on Learning Theory*. PMLR, 1125–1139.

[25] Daniel Cohen, Brendan O'Connor, and W. Bruce Croft. 2018. Understanding the representational power of neural retrieval models using NLP tasks. In *Proceedings of the SIGIR 2018*. 67–74.

[26] Stav Cohen, Ron Bitton, and Ben Nassi. 2024. Unleashing worms and extracting data: Escalating the outcome of attacks against rag-based inference in scale and severity using jailbreaking. arXiv:2409.08045. Retrieved from https://arxiv.org/abs/2409.08045 (2024).

[27] Nick Craswell, Bhaskar Mitra, Emine Yilmaz, Daniel Campos, and Ellen M. Voorhees. 2020. Overview of the TREC 2019 deep learning track. arXiv:2003.07820. Retrieved from https://arxiv.org/abs/2003.07820 (2020).

[28] Florin Cuconasu, Giovanni Trappolini, Federico Siciliano, Simone Filice, Cesare Campagnano, Yoelle Maarek, Nicola Tonellotto, and Fabrizio Silvestri. 2024. The power of noise: Redefining retrieval for rag systems. In *ACM SIGIR*.

[29] Junyun Cui, Xiaoyu Shen, Feiping Nie, Zheng Wang, Jinglong Wang, and Yulong Chen. 2022. A survey on legal judgment prediction: Datasets, metrics, models and challenges. arXiv:2204.04859. Retrieved from https://arxiv.org/abs/2204.04859 (2022).

[30] Sagnik Dakshit. 2024. Faculty perspectives on the potential of RAG in computer science higher education. arXiv:2408.01462. Retrieved from https://arxiv.org/abs/2408.01462 (2024).

[31] Boyi Deng, Wenjie Wang, Fengbin Zhu, Qifan Wang, and Fuli Feng. 2024. CrAM: Credibility-aware attention modification in llms for combating misinformation in RAG. arXiv:2406.11497. Retrieved from https://arxiv.org/abs/2406.11497 (2024).

[32] Gelei Deng, Yi Liu, Kailong Wang, Yuekang Li, Tianwei Zhang, and Yang Liu. 2024. Pandora: Jailbreak GPTs by retrieval augmented generation poisoning. arXiv:2402.08416. Retrieved from https://arxiv.org/abs/2402.08416 (2024).

[33] Finale Doshi-Velez, Mason Kortz, Ryan Budish, Chris Bavitz, Sam Gershman, et al. 2017. Accountability of AI under the law: The role of explanation. arXiv:1711.01134. Retrieved from https://arxiv.org/abs/1711.01134 (2017).

[34] Mingxuan Du, Benfeng Xu, Chiwei Zhu, Shaohan Wang, Pengyu Wang, Xiaorui Wang, and Zhendong Mao. 2026. A-RAG: Scaling agentic retrieval-augmented generation via hierarchical retrieval interfaces. arXiv:2602.03442. Retrieved from (2026). https://arxiv.org/abs/2602.03442

[35] Jaiden Fairoze, Sanjam Garg, Somesh Jha, Saeed Mahloujifar, Mohammad Mahmoody, and Mingyuan Wang. 2023. Publicly-Detectable Watermarking for Language Models. Cryptology ePrint Archive, Paper 2023/1661.

[36] Wenqi Fan, Yujuan Ding, Liangbo Ning, Shijie Wang, Hengyun Li, Dawei Yin, Tat-Seng Chua, and Qing Li. 2024. A survey on rag meeting LLMs: Towards retrieval-augmented large language models. In *ACM KDD*. 6491–6501.

[37] Feiteng Fang, Yuelin Bai, Shiwen Ni, Min Yang, Xiaojun Chen, and Ruifeng Xu. 2024. Enhancing noise robustness of retrieval-augmented language models with adaptive adversarial training. arXiv:2405.20978. Retrieved from https://arxiv.org/abs/2405.20978 (2024).

[38] Philip Feldman, James R. Foulds, and Shimei Pan. 2024. RAGged Edges: The double-edged sword of retrieval-augmented chatbots. arXiv:2403.01193. Retrieved from https://arxiv.org/abs/2403.01193 (2024).

[39] Christiane Fellbaum. 1998. WordNet: An electronic lexical database. *MIT Press*, Cambridge, MA.

[40] Fernando Ferraretto, Thiago Laitz, Roberto Lotufo, and Rodrigo Nogueira. 2023. Exaranker: Explanation-augmented neural ranker. arXiv:2301.10521. Retrieved from https://arxiv.org/abs/2301.10521 (2023).

[41] Thibault Formal, Benjamin Piwowarski, and Stéphane Clinchant. 2021. A white box analysis of ColBERT. In *ECIR*. Springer, 257–263.

[42] Sorelle A. Friedler, Carlos Scheidegger, Suresh Venkatasubramanian, Sonam Choudhary, Evan P. Hamilton, and Derek Roth. 2019. A comparative study of fairness-enhancing interventions in machine learning. In *Proceedings of the Conference on Fairness, Accountability, and Transparency*.

[43] Haowei Fu, Bo Ni, Han Xu, Kunpeng Liu, Dan Lin, and Tyler Derr. 2025. Ensemble Privacy Defense for Knowledge-Intensive LLMs against Membership Inference Attacks. arXiv:2512.03100. Retrieved from https://arxiv.org/abs/2512.03100 (2025).

[44] Isabel O. Gallegos, Ryan A. Rossi, et al. 2024. Bias and fairness in large language models: A survey. *Computational Linguistics* 50, 3 (09 2024), 1097–1179.

[45] Yunfan Gao, Yun Xiong, Xinyu Gao, et al. 2023. Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997* (2023).

[46] Jiahui Geng, Fengyu Cai, Yuxia Wang, Heinz Koeppl, Preslav Nakov, and Iryna Gurevych. 2024. A survey of confidence estimation and calibration in large language models. In *NAACL*. 6577–6595.

[47] N. Ghaffari Laleh, D. Truhn, G. P. Veldhuizen, et al. 2022. Adversarial attacks and adversarial robustness in computational pathology. *Nature Communications* 13 (Sep 2022), 5711.

[48] Google. 2024. Google Workspace and Vertex AI: Grounding with Retrieval-Augmented Generation. Retrieved October 1, 2024 from https://cloud.google.com/vertex-ai/docs/generative-ai/grounding/overview

[49] Kai Greshake, Sahar Abdelnabi, Shailesh Mishra, Christoph Endres, Thorsten Holz, and Mario Fritz. 2023. Not what you've signed up for: Compromising real-world LLM-integrated applications with indirect prompt injection. In *Proceedings of the 16th ACM Workshop on Artificial Intelligence and Security*. 79–90.

[50] Chenchen Gu, Xiang Lisa Li, Percy Liang, and Tatsunori Hashimoto. 2024. On the learnability of watermarks for language models. In *ICLR*.

[51] Batu Guan et al. 2024. CodeIP: A grammar-guided multi-bit watermark for large language models of code. In *EMNLP 2024*. Association for Computational Linguistics, Miami, Florida, USA, 9243–9258.

[52] Junfeng Guo, Yiming Li, Ruibo Chen, Yihan Wu, Chenxi Liu, Yanshuo Chen, and Heng Huang. 2025. Towards copyright protection for knowledge bases of retrieval-augmented language models via reasoning. arXiv:2502.10440. Retrieved from https://arxiv.org/abs/2502.10440 (2025).

[53] Moritz Hardt, Eric Price, and Nati Srebro. 2016. Equality of opportunity in supervised learning. In *Advances in Neural Information Processing Systems (NeurIPS 2016)* 29 (2016), 3315–3323.

[54] Kai He, Rui Mao, Qika Lin, Yucheng Ruan, Xiang Lan, Mengling Feng, and Erik Cambria. 2025. A survey of large language models for healthcare: from data, technology, and applications to accountability and ethics. *Information Fusion* 118 (2025), 102963.

[55] Wenchong He, Zhe Jiang, Tingsong Xiao, Zelin Xu, and Yukun Li. 2024. A survey on uncertainty quantification methods for deep learning. arXiv:2302.13425. Retrieved from https://arxiv.org/abs/2302.13425 (2024).

[56] Abe Bohan Hou, Jingyu Zhang, Tianxing He, Yichen Wang, Yung-Sung Chuang, et al. 2023. Semstamp: A semantic watermark with paraphrastic robustness for text generation. arXiv:2310.03991. Retrieved from https://arxiv.org/abs/2310.03991 (2023).

[57] Xinyi Hou, Yanjie Zhao, Yue Liu, Zhou Yang, Kailong Wang, et al. 2024. Large language models for software engineering: A systematic literature review. *ACM Transactions on Software Engineering and Methodology* 33, 8, Article 220 (2024), 79 pages.

[58] Mengxuan Hu, Hongyi Wu, Zihan Guan, Ronghang Zhu, Dongliang Guo, Daiqing Qi, and Sheng Li. 2024. No free lunch: Retrieval-augmented generation undermines fairness in LLMs, Even for vigilant users. arXiv:2410.07589. Retrieved from (2024). https://arxiv.org/abs/2410.07589

[59] Yuntong Hu, Zhihan Lei, Zheng Zhang, Bo Pan, Chen Ling, and Liang Zhao. 2025. GRAG: Graph retrieval-augmented generation. arXiv:2405.16506. Retrieved from (2025). https://arxiv.org/abs/2405.16506

[60] Xiaowei Huang, Wenjie Ruan, Wei Huang, et al. 2023. A survey of safety and trustworthiness of large language models through the lens of verification and validation. arXiv:2305.11391. Retrieved from https://arxiv.org/abs/2305.11391 (2023).

[61] Mohamed Manzour Hussien, Angie Nataly Melo, Augusto Luis Ballardini, Carlota Salinas Maldonado, Rubén Izquierdo, and Miguel Ángel Sotelo. 2024. RAG-based explainable prediction of road users behaviors for automated driving using knowledge graphs and large language models. arXiv:2405.00449. Retrieved from https://arxiv.org/abs/2405.00449 (2024).

[62] Hakan Inan, Kartikeya Upasani, Jianfeng Chi, Rashi Rungta, Krithika Iyer, Yuning Mao, Michael Tontchev, Qing Hu, Brian Fuller, Davide Testuggine et al. 2023. Llama Guard: LLM-based Input-Output Safeguard for Human-AI Conversations. arXiv:2312.06674. Retrieved from (2023). https://arxiv.org/abs/2312.06674

[63] Muhammad Munwar Iqbal, Umair Khadam, Ki Jun Han, Jihun Han, and Sohail Jabbar. 2019. A robust digital watermarking algorithm for text document copyright protection based on feature coding. In *IWCMC*. IEEE.

[64] Wonje Jeung, Dongjae Jeon, Ashkan Yousefpour, and Jonghyun Choi. 2025. Large language models still exhibit bias in long text. In *Findings of ACL*.
[65] Changyue Jiang, Xudong Pan, Geng Hong, Chenfu Bao, Yang Chen, and Min Yang. 2025. Feedback-guided extraction of knowledge base from retrieval-augmented LLM applications. arXiv:2411.14110. Retrieved from (2025). https://arxiv.org/abs/2411.14110
[66] Bowen Jin, Chulin Xie, Jiawei Zhang, et al. 2024. Graph chain-of-thought: Augmenting large language models by reasoning on graphs. arXiv:2404.07103. Retrieved from https://arxiv.org/abs/2404.07103 (2024).
[67] Nikola Jovanović, Robin Staab, Maximilian Baader, and Martin Vechev. 2024. Ward: Provable RAG dataset inference via LLM watermarks. arXiv:2410.03537. Retrieved from https://arxiv.org/abs/2410.03537 (2024).
[68] Jaehyung Kim, Jaehyun Nam, Sangwoo Mo, Jongjin Park, Sang-Woo Lee, Minjoon Seo, Jung-Woo Ha, and Jinwoo Shin. 2024. SuRe: Summarizing retrievals using answer candidates for open-domain QA of LLMs. arXiv:2404.13081. Retrieved from https://arxiv.org/abs/2404.13081 (2024).
[69] To Eun Kim and Fernando Diaz. 2024. Towards fair RAG: On the impact of fair ranking in retrieval-augmented generation. arXiv:2409.11598. Retrieved from https://arxiv.org/abs/2409.11598 (2024).
[70] John Kirchenbauer, Jonas Geiping, Yuxin Wen, Jonathan Katz, Ian Miers, and Tom Goldstein. 2023. A watermark for large language models. In *Proceedings of the International Conference on Machine Learning*. PMLR, 17061–17084.
[71] John Kirchenbauer, Jonas Geiping, Yuxin Wen, Manli Shu, Khalid Saifullah, et al. 2024. On the reliability of watermarks for large language models. In *ICLR*.
[72] Bryan Klimt and Yiming Yang. 2004. The enron corpus: A new dataset for email classification research. In *Machine Learning: ECML 2004 (Lecture Notes in Computer Science, Vol. 3201)*. Springer, 217–226.
[73] Fanjie Kong, Shuai Yuan, Weituo Hao, and Ricardo Henao. 2023. Mitigating test-time bias for fair image retrieval. In *Proceedings of the 37th International Conference on Neural Information Processing Systems*.
[74] Bhawesh Kumar, Charlie Lu, Gauri Gupta, Anil Palepu, David Bellamy, Ramesh Raskar, and Andrew Beam. 2023. Conformal prediction with large language models for multi-choice question answering. arXiv:2305.18404. Retrieved from https://arxiv.org/abs/2305.18404 (2023).
[75] Tom Kwiatkowski, Jennimaria Palomaki, et al. 2019. Natural questions: A benchmark for question answering research. *Transactions of the Association for Computational Linguistics* 7 (2019), 452–466.
[76] Jinqi Lai, Wensheng Gan, Jiayang Wu, Zhenlian Qi, and Philip S. Yu. 2023. Large language models in law: A survey. arXiv:2312.03718. Retrieved from https://arxiv.org/abs/2312.03718 (2023).
[77] Gregory Kang Ruey Lau, Xinyuan Niu, et al. 2024. Waterfall: Framework for robust and scalable text watermarking. In *Proceedings of the ICML 2024 Workshop on Foundation Models in the Wild*.
[78] Alessandro Giaj Levra, Mauro Gatti, Roberto Mene, Dana Shiffer, et al. 2025. A large language model-based clinical decision support system for syncope recognition in the emergency department: A framework for clinical workflow integration. *European Journal of Internal Medicine* 131 (2025), 113–120. DOI: 10.1016/j.ejim.2024.09.017
[79] Jinming Li, Wentao Zhang, Tian Wang, Guanglei Xiong, Alan Lu, and Gerard Medioni. 2023. GPT4Rec: A generative framework for personalized recommendation and user interests interpretation. arXiv:2304.03879. Retrieved from https://arxiv.org/abs/2304.03879 (2023).
[80] Shuo Li et al. 2023. TRAQ: Trustworthy retrieval augmented question answering via conformal prediction. arXiv:2307.04642. Retrieved from https://arxiv.org/abs/2307.04642 (2023).
[81] Yiming Li, Ziqi Zhang, Jiawang Bai, Baoyuan Wu, Yong Jiang, and Shu-Tao Xia. 2020. Open-sourced dataset protection via backdoor watermarking. In *Proceedings of the NeurIPS Workshop on Dataset Curation and Security*.
[82] Percy Liang, Rishi Bommasani, Tony Lee, Dimitris Tsipras, Dilara Soylu, et al. 2022. Holistic evaluation of language models. arXiv:2211.09110. Retrieved from https://arxiv.org/abs/2211.09110 (2022).
[83] Chin-Yew Lin. 2004. Rouge: A package for automatic evaluation of summaries. In *Proceedings of the Text Summarization Branches Out*.
[84] Aiwei Liu, Leyi Pan, Yijian Lu, Jingjing Li, Xuming Hu, Xi Zhang, Lijie Wen, Irwin King, Hui Xiong, and Philip Yu. 2024. A survey of text watermarking in the era of large language models. *ACM Computing Surveys* 57, 2 (2024), 1–36.
[85] Mingrui Liu, Sixiao Zhang, and Cheng Long. 2024. Mask-based membership inference attacks for retrieval-augmented generation. arXiv:2410.20142. Retrieved from https://arxiv.org/abs/2410.20142 (2024).
[86] Shengjie Liu, Jing Wu, Jingyuan Bao, Wenyi Wang, Naira Hovakimyan, and Christopher G Healey. 2024. Towards a robust retrieval-based summarization system. arXiv:2403.19889. Retrieved from https://arxiv.org/abs/2403.19889 (2024).
[87] Yang Liu et al. 2024. Trustworthy LLMs: A survey and guideline for evaluating large language models' alignment. arXiv:2308.05374. Retrieved from https://arxiv.org/abs/2308.05374 (2024).
[88] Zheyuan Liu, Guangyao Dou, Zhaoxuan Tan, Yijun Tian, and Meng Jiang. 2024. Towards safer large language models through machine unlearning. arXiv:2402.10058. Retrieved from https://arxiv.org/abs/2402.10058 (2024).

[89] Quanyu Long, Yue Deng, LeiLei Gan, Wenya Wang, and Sinno Jialin Pan. 2024. Backdoor attacks on dense passage retrievers for disseminating misinformation. arXiv:2402.13532. Retrieved from https://arxiv.org/abs/2402.13532 (2024).
[90] Antoine Louis, Gijs van Dijck, and Gerasimos Spanakis. 2023. Interpretable long-form legal question answering with retrieval-augmented large language models. arXiv:2309.17050. Retrieved from https://arxiv.org/abs/2309.17050 (2023).
[91] Dong Lu, Tianyu Pang, Chao Du, Qian Liu, Xianjun Yang, and Min Lin. 2024. Test-time backdoor attacks on multimodal large language models. arXiv:2402.08577. Retrieved from https://arxiv.org/abs/2402.08577 (2024).
[92] Yijian Lu, Aiwei Liu, Dianzhi Yu, Jingjing Li, and Irwin King. 2024. An entropy-based text watermarking detection method. arXiv:2403.13485. Retrieved from https://arxiv.org/abs/2403.13485 (2024).
[93] Linhao Luo, Yuan-Fang Li, Gholamreza Haffari, and Shirui Pan. 2024. Reasoning on graphs: Faithful and interpretable large language model reasoning. In *Proceedings of the International Conference on Learning Representations*.
[94] Peizhuo Lv, Mengjie Sun, Hao Wang, Xiaofeng Wang, Shengzhi Zhang, Yuxuan Chen, Kai Chen, and Limin Sun. 2025. RAG-WM: An efficient black-box watermarking approach for retrieval-augmented generation of large language models. arXiv:2501.05249. Retrieved from https://arxiv.org/abs/2501.05249 (2025).
[95] Sean MacAvaney, Sergey Feldman, Nazli Goharian, Doug Downey, and Arman Cohan. 2022. ABNIRML: Analyzing the behavior of neural IR models. *Transactions of the Association for Computational Linguistics* 10 (2022), 224–239.
[96] Microsoft. 2024. Microsoft 365 Copilot: Retrieval-augmented generation for enterprise. Retrieved October 1, 2024 from https://learn.microsoft.com/en-us/azure/search/retrieval-augmented-generation-overview
[97] Nighat Mir. 2014. Copyright for web content using invisible text watermarking. *Computers in Human Behavior* 30 (2014), 648–653.
[98] Piotr Molenda, Adian Liusie, and Mark J.F. Gales. 2024. WaterJudge: Quality-detection trade-off when watermarking large language models. arXiv:2403.19548. Retrieved from https://arxiv.org/abs/2403.19548 (2024).
[99] Elizabeth A. Mullins, Adrian Portillo, Kristalys Ruiz-Rohena, and Aritran Piplai. 2024. Enhancing classroom teaching with LLMs and RAG. arXiv:2411.04341. Retrieved from https://arxiv.org/abs/2411.04341 (2024).
[100] Meike Nauta, Jan Trienes, Shreyasi Pathak, Elisa Nguyen, Michelle Peters, et al. 2023. From anecdotal evidence to quantitative evaluation methods: A systematic review on evaluating explainable AI. *ACM CSUR* 55, 13s (2023), 1–42.
[101] Chee Ng and Yuen Fung. 2024. Educational personalized learning path planning with large language models. arXiv:2407.11773. Retrieved from https://arxiv.org/abs/2407.11773 (2024).
[102] Bo Ni, Haowei Fu, Qinwen Ge, Franck Dernoncourt, Samyadeep Basu, Nedim Lipka, Seunghyun Yoon, Yu Wang, Nesreen K. Ahmed, Subhojyoti Mukherjee et al. 2026. Sparse personalized text generation with multi-trajectory reasoning. arXiv:2604.24996. Retrieved from (2026). https://arxiv.org/abs/2604.24996
[103] Bo Ni, Branislav Kveton, Samyadeep Basu, Subhojyoti Mukherjee, Leyao Wang, Franck Dernoncourt, Sungchul Kim, Seunghyun Yoon, Zichao Wang, Ruiyi Zhang et al. 2026. Reasoning-based personalized generation for users with sparse data. arXiv:2602.21219. Retrieved from (2026). https://arxiv.org/abs/2602.21219
[104] Bo Ni, Yu Wang, Lu Cheng, Erik Blasch, and Tyler Derr. 2025. Towards trustworthy knowledge graph reasoning: An uncertainty aware perspective. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*.
[105] Bo Ni, Yu Wang, Leyao Wang, Branislav Kveton, Franck Dernoncourt, Yu Xia, Hongjie Chen, Reuben Luera, Samyadeep Basu, Subhojyoti Mukherjee et al. 2026. A survey on LLM-based conversational user simulation. In *Proceedings of the 19th Conference of the European Chapter of the Association for Computational Linguistics (Volume 1: Long Papers)*, Vera Demberg, Kentaro Inui, and Lluís Marquez (Eds.). Association for Computational Linguistics, Rabat, Morocco, 4266–4301. DOI: https://doi.org/10.18653/v1/2026.eacl-long.200
[106] Agada Joseph Oche, Ademola Glory Folashade, Tirthankar Ghosal, and Arpan Biswas. 2025. A systematic review of key retrieval-augmented generation (RAG) systems: Progress, gaps, and future directions. arXiv:2507.18910. Retrieved from (2025). https://arxiv.org/abs/2507.18910
[107] Leyi Pan, Aiwei Liu, Zhiwei He, Zitian Gao, Xuandong Zhao, Yijian Lu, Binglin Zhou, Shuliang Liu, Xuming Hu, Lijie Wen, et al. 2024. Markllm: An open-source toolkit for llm watermarking. arXiv:2405.10051. Retrieved from https://arxiv.org/abs/2405.10051 (2024).
[108] George Papageorgiou, Vangelis Sarlis, Manolis Maragoudakis, and Christos Tjortjis. 2024. Enhancing e-government services through state-of-the-art, modular, and reproducible architecture over large language models. *Applied Sciences* 14, 18,Article 8259 (2024). DOI: https://doi.org/10.3390/app14188259
[109] George Papageorgiou, Vangelis Sarlis, Manolis Maragoudakis, and Christos Tjortjis. 2025. Hybrid multi-agent graphrag for e-government: Towards a trustworthy AI assistant. *Applied Sciences* 15, 11, Article 6315 (2025). DOI: https://doi.org/10.3390/app15116315
[110] George Papageorgiou, Vangelis Sarlis, Manolis Maragoudakis, and Christos Tjortjis. 2025. A multimodal framework embedding retrieval-augmented generation with MLLMs for eurobarometer data. *AI* 6, 3, Article 50 (2025). DOI: https://doi.org/10.3390/ai6030050
[111] Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. BLEU: A method for automatic evaluation of machine translation. In *ACL*.

[112] Alicia Parrish, Angelica Chen, Nikita Nangia, et al. 2021. BBQ: A hand-built bias benchmark for question answering. arXiv:2110.08193. Retrieved from https://arxiv.org/abs/2110.08193 (2021).
[113] Yuefeng Peng, Junda Wang, Hong Yu, and Amir Houmansadr. 2024. Data extraction attacks in retrieval-augmented generation via backdoors. arXiv:2411.01705. Retrieved from https://arxiv.org/abs/2411.01705 (2024).
[114] Perplexity AI. 2024. Perplexity AI: Search-augmented answer engine. Retrieved October 1, 2024 from https://www.perplexity.ai
[115] Julien Piet, Chawin Sitawarin, Vivian Fang, Norman Mu, and David Wagner. 2023. Mark my words: Analyzing and evaluating language model watermarks. arXiv:2312.00273. Retrieved from https://arxiv.org/abs/2312.00273 (2023).
[116] Nicholas Pipitone and Ghita Houir Alami. 2024. LegalBench-RAG: A benchmark for retrieval-augmented generation in the legal domain. arXiv:2408.10343. Retrieved from https://arxiv.org/abs/2408.10343 (2024).
[117] Gregory Plumb, Maruan Al-Shedivat, Ángel Alexander Cabrera, et al. 2020. Regularizing black-box models for improved interpretability. In *Advances in Neural Information Processing Systems (NeurIPS 2020)* 33 (2020), 10526–10536.
[118] Sayantan Polley. 2022. Towards explainable search in legal text. In *ECIR*. Springer, 528–536.
[119] Jingyuan Qi, Zhiyang Xu, Qifan Wang, and Lifu Huang. 2025. AR-RAG: Autoregressive retrieval augmentation for image generation. arXiv:2506.06962. Retrieved from (2025). https://arxiv.org/abs/2506.06962
[120] Zhenting Qi, Hanlin Zhang, Eric Xing, Sham Kakade, and Himabindu Lakkaraju. 2024. Follow my instruction and spill the beans: Scalable data extraction from retrieval-augmented generation systems. arXiv:2402.17840. Retrieved from (2024). https://arxiv.org/abs/2402.17840
[121] Yifan Qiao, Chenyan Xiong, Zhenghao Liu, and Zhiyuan Liu. 2019. Understanding the behaviors of bert in ranking. arXiv:1904.07531. Retrieved from https://arxiv.org/abs/1904.07531 (2019).
[122] Wenjie Qu, Dong Zou, Zetian Zhang, Yidong He, and Wei Gao. 2025. Provably robust multi-bit watermarking for ai-generated text. In *USENIX Security*.
[123] Victor Quach, Adam Fisch, Tal Schuster, Adam Yala, Jae Ho Sohn, Tommi S. Jaakkola, and Regina Barzilay. 2024. Conformal language modeling. arXiv:2306.10193. Retrieved from https://arxiv.org/abs/2306.10193 (2024).
[124] P Rajpurkar. 2016. Squad: 100,000+ questions for machine comprehension of text. arXiv:1606.05250. Retrieved from https://arxiv.org/abs/1606.05250 (2016).
[125] Nils Reimers and Iryna Gurevych. 2019. Sentence-BERT: Sentence embeddings using siamese BERT-networks. arXiv:1908.10084. Retrieved from (2019). https://arxiv.org/abs/1908.10084
[126] Navid Rekabsaz, Simone Kopeinik, and Markus Schedl. 2021. Societal biases in retrieved contents: Measurement framework and adversarial mitigation of bert rankers. In *SIGIR*.
[127] Navid Rekabsaz and Markus Schedl. 2020. Do neural ranking models intensify gender bias?. In *SIGIR*.
[128] Marco Tulio Ribeiro, Sameer Singh, and Carlos Guestrin. 2016. "Why should i trust you?" explaining the predictions of any classifier. In *ACM SIGKDD*.
[129] Joel Rorseth, Parke Godfrey, Lukasz Golab, Divesh Srivastava, and Jaroslaw Szlichta. 2024. RAGE against the machine: Retrieval-augmented LLM explanations. arXiv:2405.13000. Retrieved from https://arxiv.org/abs/2405.13000 (2024).
[130] Pouria Rouzrokh, Shahriar Faghani, Cooper U. Gamble, Moein Shariatnia, and Bradley J. Erickson. 2024. Conflare: Conformal large language model retrieval. arXiv:2404.04287. Retrieved from https://arxiv.org/abs/2404.04287 (2024).
[131] Alireza Salemi, Sheshera Mysore, Michael Bendersky, and Hamed Zamani. 2023. Lamp: When large language models meet personalization. arXiv:2304.11406. Retrieved from https://arxiv.org/abs/2304.11406 (2023).
[132] Ryoma Sato, Yuki Takezawa, Han Bao, Kenta Niwa, and Makoto Yamada. 2023. Embarrassingly simple text watermarks. arXiv:2310.08920. Retrieved from https://arxiv.org/abs/2310.08920 (2023).
[133] Johannes Schneider. 2024. Explainable generative AI (GenXAI): A survey, conceptualization, and research agenda. *Artificial Intelligence Review* 57, 11 (2024), 289.
[134] Silvia Seoni, Vicnesh Jahmunah, Massimo Salvi, Prabal Datta Barua, Filippo Molinari, and U. Rajendra Acharya. 2023. Application of uncertainty quantification to artificial intelligence in healthcare: A review of last decade (2013–2023). *Computers in Biology and Medicine* 165 (2023), 107441.
[135] Glenn Shafer and Vladimir Vovk. 2007. A tutorial on conformal prediction. arXiv:0706.3188. Retrieved from https://arxiv.org/abs/0706.3188 (2007).
[136] Emily Sheng, Kai-Wei Chang, Prem Natarajan, and Nanyun Peng. 2021. "Nice try, kiddo": Investigating ad hominems in dialogue responses. In *Proceedings of the NAACL 2021*. Association for Computational Linguistics, Online.
[137] Noah Shinn, Federico Cassano, Edward Berman, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. 2023. Reflexion: Language agents with verbal reinforcement learning. In *Proceedings of the Advances in Neural Information Processing Systems (NeurIPS)*, Vol. 36. arXiv:2303.11366. Retrieved from https://arxiv.org/abs/2303.11366
[138] Robik Shrestha, Yang Zou, Qiuyu Chen, Zhiheng Li, Yusheng Xie, and Siqi Deng. 2024. FairRAG: Fair human generation via fair retrieval augmentation. In *Proceedings of the Computer Vision and Pattern Recognition*.
[139] Jaspreet Singh, Megha Khosla, Wang Zhenye, and Avishek Anand. 2021. Extracting per query valid explanations for blackbox learning-to-rank models. In *SIGIR*. 203–210.

[140] K. Singhal, S. Azizi, T. Tu, et al. 2023. Large language models encode clinical knowledge. *Nature* 620, 7972 (2023), 172–180.
[141] Heydar Soudani, Hamed Zamani, and Faegheh Hasibi. 2026. Uncertainty quantification for retrieval-augmented reasoning. arXiv:2510.11483. Retrieved from (2026). https://arxiv.org/abs/2510.11483
[142] Jiayuan Su, Jing Luo, Hongwei Wang, and Lu Cheng. 2024. API Is enough: Conformal prediction for large language models without logit-access. arXiv:2403.01216. Retrieved from https://arxiv.org/abs/2403.01216 (2024).
[143] Viju Sudhi, Sinchana Ramakanth Bhat, Max Rudat, and Roman Teucher. 2024. RAG-Ex: A generic framework for explaining retrieval augmented generation. In *SIGIR*. 2776–2780.
[144] Jiashuo Sun, Chengjin Xu, Lumingyuan Tang, Saizhuo Wang, Chen Lin, et al. 2023. Think-on-graph: Deep and responsible reasoning of large language model with knowledge graph. In *ICLR*.
[145] Qingyun Sun, Jiaqi Yuan, Shan He, Xiao Guan, Haonan Yuan, Xingcheng Fu, Jianxin Li, and Philip S. Yu. 2025. DyG-RAG: Dynamic graph retrieval-augmented generation with event-centric reasoning. arXiv:2507.13396. Retrieved from (2025). https://arxiv.org/abs/2507.13396
[146] Zhensu Sun, Xiaoning Du, Fu Song, and Li Li. 2023. Codemark: Imperceptible watermarking for code datasets against neural code completion models. In *ESEC/FSE*. 1561–1572.
[147] Zhensu Sun, Xiaoning Du, Fu Song, Mingze Ni, and Li Li. 2022. Coprotector: Protect open-source code against unauthorized training usage with data poisoning. In *Proceedings of the ACM Web Conference 2022*. 652–660.
[148] Elham Tabassi. 2022. Trustworthy AI: Managing the Risks of Artificial Intelligence. Retrieved July 1, 2024 from https://www.nist.gov/speech-testimony/trustworthy-ai-managing-risks-artificial-intelligence
[149] Alon Talmor and Jonathan Berant. 2018. The web as a knowledge-base for answering complex questions. arXiv:1803.06643. Retrieved from https://arxiv.org/abs/1803.06643 (2018).
[150] Sule Tekkesinoglu and Lars Kunze. 2024. From feature importance to natural language explanations using LLMs with RAG. arXiv:2407.20990. Retrieved from https://arxiv.org/abs/2407.20990 (2024).
[151] Maung Thway, Jose Recatala-Gomez, Fun Siong Lim, Kedar Hippalgaonkar, and Leonard W. T. Ng. 2023. Battling botpoop using genai for higher education: A study of a retrieval augmented generation chatbots impact on learning. (2023).
[152] Mercan Topkara, Umut Topkara, and Mikhail J Atallah. 2006. Words are not enough: Sentence level natural language watermarking. In *Proceedings of the 4th ACM International Workshop on Contents Protection and Security*. 37–46.
[153] Umut Topkara, Mercan Topkara, and Mikhail J. Atallah. 2006. The hiding virtues of ambiguity: Quantifiably resilient watermarking of natural language text through synonym substitutions. In *MM&Sec*. 164–174.
[154] Hugo Touvron et al. 2023. LLaMA: Open and efficient foundation language models. arXiv:2302.13971. Retrieved from https://arxiv.org/abs/2302.13971 (2023).
[155] Dustin Tran, Jeremiah Liu, Michael W. Dusenberry, et al. 2022. Plex: Towards reliability using pretrained large model extensions. arXiv:2207.07411. Retrieved from https://arxiv.org/abs/2207.07411 (2022).
[156] Shangqing Tu, Yuliang Sun, Yushi Bai, Jifan Yu, Lei Hou, and Juanzi Li. 2024. WaterBench: Towards holistic evaluation of watermarks for large language models. In *ACL*. 1517–1542.
[157] Manisha Verma and Debasis Ganguly. 2019. LIRME: Locally interpretable ranking model explanation. In *SIGIR*.
[158] Michael Völske, Alexander Bondarenko, Maik Fröbe, Benno Stein, Jaspreet Singh, Matthias Hagen, and Avishek Anand. 2021. Towards axiomatic explanations for neural ranking models. In *ICTIR*. 13–22.
[159] Dean Wampler, Dave Nielson, and Alireza Seddighi. 2025. Engineering the RAG stack: A comprehensive review of the architecture and trust frameworks for retrieval-augmented generation systems. arXiv:2601.05264. Retrieved from https://arxiv.org/abs/2601.05264 (2025).
[160] Boxin Wang, Weixin Chen, Hengzhi Pei, et al. 2023. DecodingTrust: A comprehensive assessment of trustworthiness in GPT models. In *NeurIPS*. Article 1361, 108 pages.
[161] Fei Wang, Xingchen Wan, Ruoxi Sun, Jiefeng Chen, and Sercan Ö. Arık. 2025. Astute RAG: Overcoming imperfect retrieval augmentation and knowledge conflicts for large language models. arXiv:2410.07176. Retrieved from (2025). https://arxiv.org/abs/2410.07176
[162] Qiyao Wang, Guhong Chen, Hongbo Wang, Huaren Liu, Minghui Zhu, Zhifei Qin, Linwei Li, Yilin Yue, Shiqiang Wang, Jiayan Li et al. 2025. IPBench: Benchmarking the knowledge of large language models in intellectual property. arXiv:2504.15524. Retrieved from (2025). https://arxiv.org/abs/2504.15524
[163] Shen Wang, Tianlong Xu, Hang Li, Chaoli Zhang, Joleen Liang, Jiliang Tang, Philip S. Yu, and Qingsong Wen. 2024. Large language models for education: A survey and outlook. arXiv:2403.18105. Retrieved from https://arxiv.org/abs/2403.18105 (2024).
[164] Yuan Wang, Xuyang Wu, Hsin-Tai Wu, Zhiqiang Tao, and Yi Fang. 2024. Do large language models rank fairly? an empirical study on the fairness of LLMs as rankers. arXiv:2404.03192. Retrieved from https://arxiv.org/abs/2404.03192 (2024).

[165] Zhiyuan Wang, Jinhao Duan, Qingni Wang, Xiaofeng Zhu, Tianlong Chen, Xiaoshuang Shi, and Kaidi Xu. 2025. COIN: Uncertainty-guarding selective question answering for foundation models with provable risk guarantees. arXiv:2506.20178. Retrieved from https://arxiv.org/abs/2506.20178(2025).

[166] Ziqiu Wang, Jun Liu, Shengkai Zhang, and Yang Yang. 2024. Poisoned LangChain: Jailbreak LLMs by LangChain. arXiv:2406.18122. Retrieved from https://arxiv.org/abs/2406.18122 (2024).

[167] Alexander Wei, Nika Haghtalab, and Jacob Steinhardt. 2023. Jailbroken: How does LLM safety training fail?. In *NeurIPS*.

[168] Nirmalie Wiratunga, Ramitha Abeyratne, Lasal Jayawardena, Kyle Martin, Stewart Massie, et al. 2023. CBR-RAG: Case-based reasoning for retrieval augmented generation in LLMs for legal question answering. arXiv:2312.10997. Retrieved from https://arxiv.org/abs/2312.10997 (2023).

[169] Xuyang Wu, Shuowei Li, Hsin-Tai Wu, Zhiqiang Tao, and Yi Fang. 2024. Does RAG introduce unfairness in LLMs? evaluating fairness in retrieval-augmented generation systems. arXiv:2409.19804. Retrieved from https://arxiv.org/abs/2409.19804 (2024).

[170] Yiquan Wu, Siying Zhou, Yifei Liu, Weiming Lu, Xiaozhong Liu, et al. 2023. Precedent-enhanced legal judgment prediction with LLM and domain-model collaboration. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing (EMNLP 2023)*.

[171] Guangzhi Xiong, Qiao Jin, Zhiyong Lu, and Aidong Zhang. 2024. Benchmarking retrieval-augmented generation for medicine. arXiv:2402.13178. Retrieved from https://arxiv.org/abs/2402.13178 (2024).

[172] Miao Xiong, Zhiyuan Hu, Xinyang Lu, Yifei Li, Jie Fu, Junxian He, and Bryan Hooi. 2024. Can LLMs express their uncertainty? an empirical evaluation of confidence elicitation in LLMs. In *ICLR*.

[173] Hengyuan Xu, Liyao Xiang, Xingjun Ma, Borui Yang, and Baochun Li. 2024. Hufu: A modality-agnositc watermarking system for pre-trained transformers via permutation equivariance. arXiv:2403.05842. Retrieved from https://arxiv.org/abs/2403.05842 (2024).

[174] Shicheng Xu, Liang Pang, Huawei Shen, and Xueqi Cheng. 2024. A theory for token-level harmonization in retrieval-augmented generation. arXiv:2406.00944. Retrieved from https://arxiv.org/abs/2406.00944 (2024).

[175] Xiaojun Xu, Yuanshun Yao, and Yang Liu. 2024. Learning to watermark LLM-generated text via reinforcement learning. arXiv:2403.10553. Retrieved from https://arxiv.org/abs/2403.10553 (2024).

[176] Jiaqi Xue, Mengxin Zheng, Yebowen Hu, Fei Liu, Xun Chen, and Qian Lou. 2024. BadRAG: Identifying vulnerabilities in retrieval augmented generation of large language models. arXiv:2406.00083. Retrieved from https://arxiv.org/abs/2406.00083 (2024).

[177] Jiaqi Xue, Mengxin Zheng, Ting Hua, Yilin Shen, Yepeng Liu, Ladislau Bölöni, and Qian Lou. 2024. TrojLLM: A black-box trojan prompt attack on large language models. *Advances in Neural Information Processing Systems (NeurIPS'23)*. 36 (2024).

[178] An Yang, Anfeng Li, et al. 2025. Qwen3 technical report. arXiv:2505.09388. Retrieved from (2025). https://arxiv.org/abs/2505.09388

[179] Haoyan Yang, Zhitao Li, Yong Zhang, Jianzong Wang, et al. 2023. Prca: Fitting black-box large language models for retrieval question answering via pluggable reward-driven contextual adapter. arXiv:arXiv:2310.18347. Retrieved from https://arxiv.org/abs/2310.18347 (2023).

[180] R. Yang, Y. Ning, E. Keppo, et al. 2025. Retrieval-augmented generation for generative artificial intelligence in health care. *npj Health Systems* 2 (2025), 2.

[181] Xi Yang, Jie Zhang, Kejiang Chen, Weiming Zhang, Zehua Ma, Feng Wang, and Nenghai Yu. 2022. Tracing text provenance via context-aware lexical substitution. In *Proceedings of the AAAI Conference*, Vol. 36. 11613–11621.

[182] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. 2023. ReAct: Synergizing reasoning and acting in language models. In *Proceedings of the International Conference on Learning Representations (ICLR)*. https://arxiv.org/abs/2210.03629

[183] Fanghua Ye, Mingming Yang, Jianhui Pang, Longyue Wang, Derek F. Wong, Emine Yilmaz, Shuming Shi, and Zhaopeng Tu. 2024. Benchmarking LLMs via Uncertainty Quantification. arXiv:2401.12794. Retrieved from https://arxiv.org/abs/2401.12794 (2024).

[184] Wen-tau Yih, Matthew Richardson, Christopher Meek, Ming-Wei Chang, and Jina Suh. 2016. The value of semantic parse labeling for knowledge base question answering. In *ACL*. 201–206.

[185] KiYoon Yoo, Wonhyuk Ahn, Jiho Jang, and Nojun Kwak. 2023. Robust multi-bit natural language watermarking through invariant features. In *Proceedings of the 61st ACL (Volume 1: Long Papers)*. Toronto, Canada.

[186] KiYoon Yoo, Wonhyuk Ahn, and Nojun Kwak. 2024. Advancing beyond identification: multi-bit watermark for large language models. In *NAACL*.

[187] Ori Yoran, Tomer Wolfson, Ori Ram, and Jonathan Berant. 2024. Making Retrieval-Augmented Language Models Robust to Irrelevant Context. arXiv:2310.01558. Retrieved from https://arxiv.org/abs/2310.01558 (2024).

[188] Shenglai Zeng, Jiankun Zhang, Pengfei He, et al. 2024. The good and the bad: Exploring privacy issues in retrieval-augmented generation (RAG). *Findings of the Association for Computational Linguistics: ACL 2024* (2024), 4505–4524.
[189] Shenglai Zeng, Jiankun Zhang, Pengfei He, Jie Ren, Tianqi Zheng, et al. 2024. Mitigating the privacy issues in retrieval-augmented generation (RAG) via pure synthetic data. arXiv:2406.14773. Retrieved from https://arxiv.org/abs/2406.14773 (2024).
[190] Ruisi Zhang, Shehzeen Samarah Hussain, Paarth Neekhara, and Farinaz Koushanfar. 2024. REMARK-LLM: A robust and efficient watermarking framework for generative large language models. In *Proceedings of the USENIX Security*. 1813–1830.
[191] Yongfeng Zhang, Xu Chen, et al. 2020. Explainable recommendation: A survey and new perspectives. *Foundations and Trends® in Information Retrieval* 14, 1 (2020), 1–101.
[192] Yongfeng Zhang, Jiaxin Mao, and Qingyao Ai. 2019. Tutorial on explainable recommendation and search. In *WWW*.
[193] Zijian Zhang, Koustav Rudra, and Avishek Anand. 2021. Explain and predict, and then predict again. In *Proceedings of the 14th ACM International conference on web search and data mining*. 418–426.
[194] Tianzhe Zhao, Jiaoyan Chen, Yanchi Ru, Haiping Zhu, Nan Hu, Jun Liu, and Qika Lin. 2025. RAG Safety: Exploring Knowledge Poisoning Attacks to Retrieval-Augmented Generation. arXiv:2507.08862. Retrieved from (2025). https://arxiv.org/abs/2507.08862
[195] Wayne Xin Zhao, Jing Liu, Ruiyang Ren, and Ji-Rong Wen. 2024. Dense text retrieval based on pretrained language models: A survey. *ACM Transactions on Information Systems* 42, 4, Article 89 (Feb. 2024), 60 pages.
[196] Zexuan Zhong, Ziqing Huang, Alexander Wettig, and Danqi Chen. 2023. Poisoning retrieval corpora by injecting adversarial passages. arXiv:2310.19156. Retrieved from https://arxiv.org/abs/2310.19156 (2023).
[197] Yujia Zhou, Yan Liu, et al. 2024. Trustworthiness in retrieval-augmented generation systems: A survey. arXiv:2409.10102. Retrieved from https://arxiv.org/abs/2409.10102 (2024).
[198] Wei Zou, Runpeng Geng, Binghui Wang, and Jinyuan Jia. 2024. PoisonedRAG: Knowledge corruption attacks to retrieval-augmented generation of large language models. arXiv:2402.07867. Retrieved from https://arxiv.org/abs/2402.07867 (2024).

Received 14 May 2025; revised 25 June 2026; accepted 10 July 2026