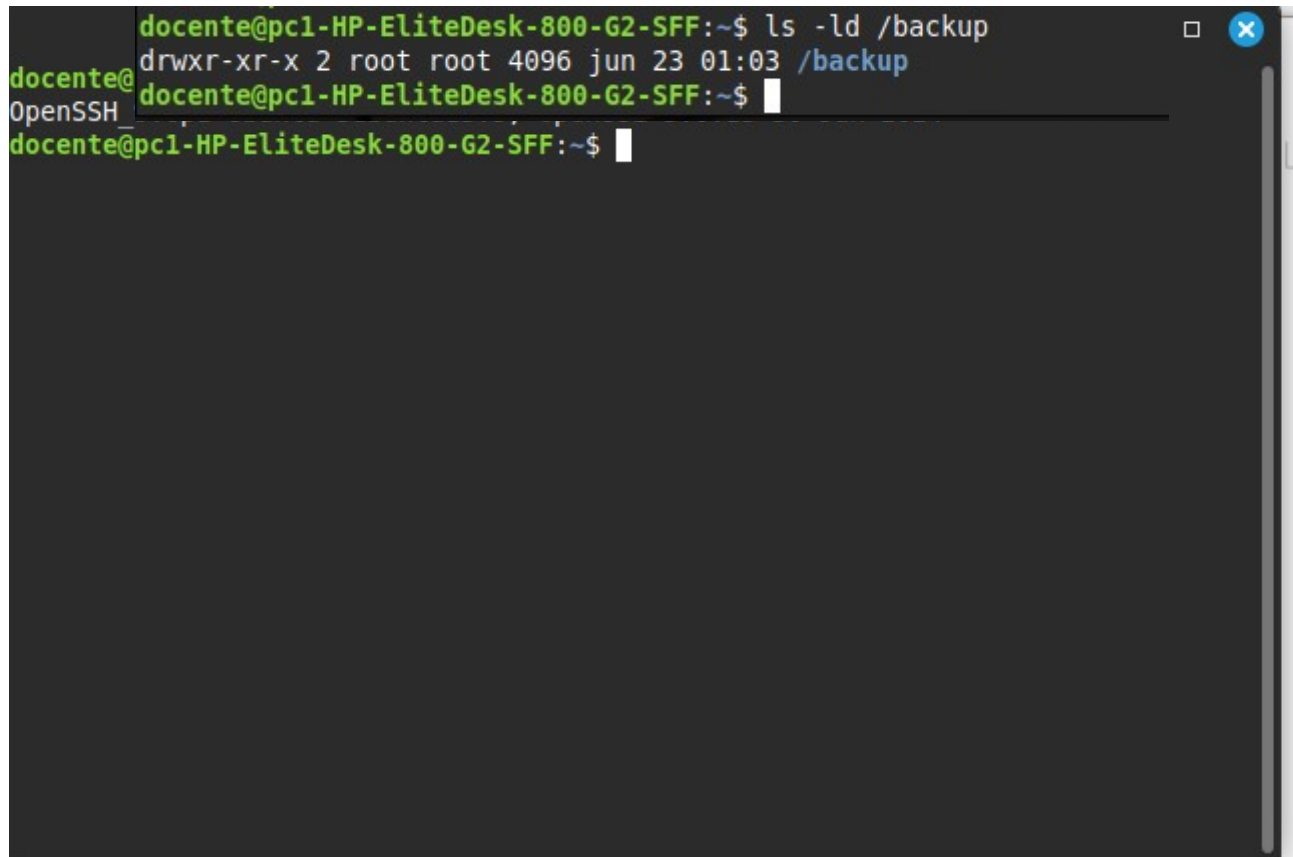


EJERCICIO PRACTICO 1: SERVICIO DE ARCHIVO Y ADMINISTRACIÓN DEL SISTEMA

A:

A terminal window with a dark background. The prompt is 'docente@pc1-HP-EliteDesk-800-G2-SFF:~\$'. The command 'ls -ld /backup' is entered. The output is 'drwxr-xr-x 2 root root 4096 jun 23 01:03 /backup'. The prompt is then shown again with a cursor. There is a small 'OpenSSH' label on the left side of the terminal window.

```
docente@pc1-HP-EliteDesk-800-G2-SFF:~$ ls -ld /backup
drwxr-xr-x 2 root root 4096 jun 23 01:03 /backup
docente@pc1-HP-EliteDesk-800-G2-SFF:~$ 
docente@pc1-HP-EliteDesk-800-G2-SFF:~$
```

B:

```
docente@pc1-HP-EliteDesk-800-G2-SFF: ~  
docente@pc1-HP-EliteDesk-800-G2-SFF:~$ sudo mkdir -p /usuario/administracion  
[sudo] contraseña para docente:  
docente@pc1-HP-EliteDesk-800-G2-SFF:~$ sudo groupadd programadores  
groupadd: el grupo «programadores» ya existe  
docente@pc1-HP-EliteDesk-800-G2-SFF:~$
```

```
docente@pc1-HP-EliteDesk-800-G2-SFF:~$ sudo chown docente:programador /docente/administracion  
docente@pc1-HP-EliteDesk-800-G2-SFF:~$
```

```
docente@pc1-HP-EliteDesk-800-G2-SFF:~$ sudo chmod 754 /docente/administracion  
docente@pc1-HP-EliteDesk-800-G2-SFF:~$
```

```
GNU nano 7.2 /tmp/crontab.E00Fp8/crontab
# Edit this file to introduce tasks to be run by cron.
#
# Each task to run has to be defined through a single line
# indicating with different fields when the task will be run
# and what command to run for the task
#
# To define the time you can provide concrete values for
# minute (m), hour (h), day of month (dom), month (mon),
# and day of week (dow) or use '*' in these fields (for 'any').
#
# Notice that tasks will be started based on the cron's system
# daemon's notion of time and timezones.
#
# Output of the crontab jobs (including errors) is sent through
# email to the user the crontab file belongs to (unless redirected).
#
# For example, you can run a backup of all your user accounts
# at 5 a.m every week with:
# 0 5 * * 1 tar -zcf /var/backups/home.tgz /home/
#
# For more information see the manual pages of crontab(5) and cron(8)
#
# m h dom mon dow   command

[ 23 líneas leídas ]
^G Ayuda      ^O Guardar    ^W Buscar     ^K Cortar     ^T Ejecutar   ^C Ubicación  M-U Deshacer
^X Salir      ^R Leer fich. ^\ Reemplazar ^U Pegar      ^J Justificar ^/ Ir a línea  M-E Rehacer
```

```
GNU nano 7.2 /tmp/crontab.E00Fp8/crontab
# Edit this file to introduce tasks to be run by cron.
#
# Each task to run has to be defined through a single line
# indicating with different fields when the task will be run
# and what command to run for the task
#
# To define the time you can provide concrete values for
# minute (m), hour (h), day of month (dom), month (mon),
# and day of week (dow) or use '*' in these fields (for 'any').
#
# Notice that tasks will be started based on the cron's system
# daemon's notion of time and timezones.
#
# Output of the crontab jobs (including errors) is sent through
# email to the user the crontab file belongs to (unless redirected).
#
# For example, you can run a backup of all your user accounts
# at 5 a.m every week with:
# 0 5 * * 1 tar -zcf /var/backups/home.tgz /home/
#
# For more information see the manual pages of crontab(5) and cron(8)
#
# m h dom mon dow   command
0 23 * * * cp -r /docente/administracion /backup/administracion_$(date +%Y%m%d)
```

```
[ 24 líneas escritas ]
^G Ayuda      ^O Guardar    ^W Buscar     ^K Cortar     ^T Ejecutar   ^C Ubicación  M-U Deshacer
^X Salir      ^R Leer fich. ^\ Reemplazar ^U Pegar      ^J Justificar ^/ Ir a línea  M-E Rehacer
```

```
docente@pc1-HP-EliteDesk-800-G2-SFF:~$ sudo crontab -l
# Edit this file to introduce tasks to be run by cron.
#
# Each task to run has to be defined through a single line
# indicating with different fields when the task will be run
# and what command to run for the task
#
# To define the time you can provide concrete values for
# minute (m), hour (h), day of month (dom), month (mon),
# and day of week (dow) or use '*' in these fields (for 'any').
#
# Notice that tasks will be started based on the cron's system
# daemon's notion of time and timezones.
#
# Output of the crontab jobs (including errors) is sent through
# email to the user the crontab file belongs to (unless redirected).
#
# For example, you can run a backup of all your user accounts
# at 5 a.m every week with:
# 0 5 * * 1 tar -zcf /var/backups/home.tgz /home/
#
# For more information see the manual pages of crontab(5) and cron(8)
#
# m h dom mon dow  command
0 23 * * * cp -r /docente/administracion /backup/administracion_$(date +%Y%m%d)
docente@pc1-HP-EliteDesk-800-G2-SFF:~$
```

```
docente@pc1-HP-EliteDesk-800-G2-SFF:~$ ls -ld /backup
drwxr-xr-x 2 root root 4096 jun 23 01:03 /backup
docente@pc1-HP-EliteDesk-800-G2-SFF:~$
```

```
docente@pc1-HP-EliteDesk-800-G2-SFF:~$ sudo apt-get install anacron
Leyendo lista de paquetes... Hecho
Creando árbol de dependencias... Hecho
Leyendo la información de estado... Hecho
anacron ya está en su versión más reciente (2.3-39ubuntu2).
Tal vez quiera ejecutar «apt --fix-broken install» para corregirlo.
Los siguientes paquetes tienen dependencias incumplidas:
 libc6-dbg : Depende: libc6 (= 2.39-0ubuntu8.7) pero 2.39-0ubuntu8.3 va a ser instalado
 libc6-dev : Depende: libc6 (= 2.39-0ubuntu8.7) pero 2.39-0ubuntu8.3 va a ser instalado
E: Dependencias incumplidas. Intente «apt --fix-broken install» sin paquetes (o especifique una solución).
docente@pc1-HP-EliteDesk-800-G2-SFF:~$ date -d "23:00 today"
mar 23 jun 2026 23:00:00 -03
docente@pc1-HP-EliteDesk-800-G2-SFF:~$
```