```
mysql> CREATE DATABASE company;
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> USE company;
Database changed
mysql> CREATE TABLE employees1 (
    ->     employee_id INT PRIMARY KEY,
    ->     first_name VARCHAR(50),
    ->     salary DECIMAL(10,2)
    -> );
Query OK, 0 rows affected (0.01 sec)

mysql> INSERT INTO employees1 VALUES
    -> (1, 'Arun', 50000),
    -> (2, 'Bala', 75000),
    -> (3, 'Charan', 150000),
    -> (4, 'David', 160000),
    -> (5, 'Elango', 180000),
    -> (6, 'Farhan', 120000),
    -> (7, 'Gokul', 155000),
    -> (8, 'Hari', 90000),
    -> (9, 'Kumar', 200000),
    -> (10, 'Ravi', 145000);
Query OK, 10 rows affected (0.01 sec)
Records: 10  Duplicates: 0  Warnings: 0

mysql> SELECT * FROM employees1;
+-------------+------------+-----------+
| employee_id | first_name | salary    |
+-------------+------------+-----------+
```

```
 employee_id | first_name | salary    |
-------------+------------+-----------+
           1 | Arun       |  50000.00 |
           2 | Bala       |  75000.00 |
           3 | Charan     | 150000.00 |
           4 | David      | 160000.00 |
           5 | Elango     | 180000.00 |
           6 | Farhan     | 120000.00 |
           7 | Gokul      | 155000.00 |
           8 | Hari       |  90000.00 |
           9 | Kumar      | 200000.00 |
          10 | Ravi       | 145000.00 |
-------------+------------+-----------+
10 rows in set (0.00 sec)

mysql> CREATE VIEW v1 AS
    -> SELECT employee_id, salary
    -> FROM employees1;
Query OK, 0 rows affected (0.00 sec)

mysql> SELECT * FROM v1;
-------------+-----------+
 employee_id | salary    |
-------------+-----------+
           1 |  50000.00 |
           2 |  75000.00 |
           3 | 150000.00 |
           4 | 160000.00 |
           5 | 180000.00 |
           6 | 120000.00 |
           7 | 155000.00 |
           8 |  90000.00 |
```

```
|           7 | 155000.00 |
|           8 |  90000.00 |
|           9 | 200000.00 |
|          10 | 145000.00 |
+-------------+-----------+
10 rows in set (0.00 sec)

mysql> INSERT INTO v1 VALUES (11, 210000);
Query OK, 1 row affected (0.00 sec)

mysql> DELETE FROM v1
    -> WHERE employee_id = 11;
Query OK, 1 row affected (0.01 sec)

mysql> DELETE FROM v1
    -> WHERE employee_id = 11;
Query OK, 0 rows affected (0.00 sec)

mysql> SELECT * FROM v1;
+-------------+-----------+
| employee_id | salary    |
+-------------+-----------+
|           1 |  50000.00 |
|           2 |  75000.00 |
|           3 | 150000.00 |
|           4 | 160000.00 |
|           5 | 180000.00 |
|           6 | 120000.00 |
|           7 | 155000.00 |
|           8 |  90000.00 |
|           9 | 200000.00 |
|          10 | 145000.00 |
```

```
10 rows in set (0.00 sec)

mysql> CREATE INDEX index1
    -> ON employees1(salary);
Query OK, 0 rows affected (0.02 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> SELECT first_name
    -> FROM employees1
    -> WHERE salary > 145000;
+------------+
| first_name |
+------------+
| Charan     |
| Gokul      |
| David      |
| Elango     |
| Kumar      |
+------------+
5 rows in set (0.00 sec)

mysql> DROP INDEX index1
    -> ON employees1;
Query OK, 0 rows affected (0.01 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> CREATE INDEX index1
    -> ON employees1(employee_id);
Query OK, 0 rows affected (0.02 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> SELECT first_name
```


```
mysql> SELECT first_name
    -> FROM employees1
    -> WHERE employee_id = 10;
+------------+
| first_name |
+------------+
| Ravi       |
+------------+
1 row in set (0.00 sec)

mysql> DROP INDEX index1
    -> ON employees1;
Query OK, 0 rows affected (0.00 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> SELECT * FROM employees1;
+-------------+------------+-----------+
| employee_id | first_name | salary    |
+-------------+------------+-----------+
|           1 | Arun       |  50000.00 |
|           2 | Bala       |  75000.00 |
|           3 | Charan     | 150000.00 |
|           4 | David      | 160000.00 |
|           5 | Elango     | 180000.00 |
|           6 | Farhan     | 120000.00 |
|           7 | Gokul      | 155000.00 |
|           8 | Hari       |  90000.00 |
|           9 | Kumar      | 200000.00 |
|          10 | Ravi       | 145000.00 |
+-------------+------------+-----------+
10 rows in set (0.00 sec)
```

```
mysql>
mysql> SELECT * FROM v1;
+-------------+-----------+
| employee_id | salary    |
+-------------+-----------+
|           1 |  50000.00 |
|           2 |  75000.00 |
|           3 | 150000.00 |
|           4 | 160000.00 |
|           5 | 180000.00 |
|           6 | 120000.00 |
|           7 | 155000.00 |
|           8 |  90000.00 |
|           9 | 200000.00 |
|          10 | 145000.00 |
+-------------+-----------+
10 rows in set (0.00 sec)

mysql>
mysql> SHOW INDEX FROM employees1;
+------------+------------+----------+--------------+-------------+-----------+-------------+----------+--------+------+------------+-----
----+---------------+---------+------------+
| Table      | Non_unique | Key_name | Seq_in_index | Column_name | Collation | Cardinality | Sub_part | Packed | Null | Index_type | Comm
ent | Index_comment | Visible | Expression |
+------------+------------+----------+--------------+-------------+-----------+-------------+----------+--------+------+------------+-----
----+---------------+---------+------------+
| employees1 |          0 | PRIMARY  |            1 | employee_id | A         |          10 |     NULL |   NULL |      | BTREE      |
    |               | YES     | NULL       |
+------------+------------+----------+--------------+-------------+-----------+-------------+----------+--------+------+------------+-----
----+---------------+---------+------------+
1 row in set (0.01 sec)
```

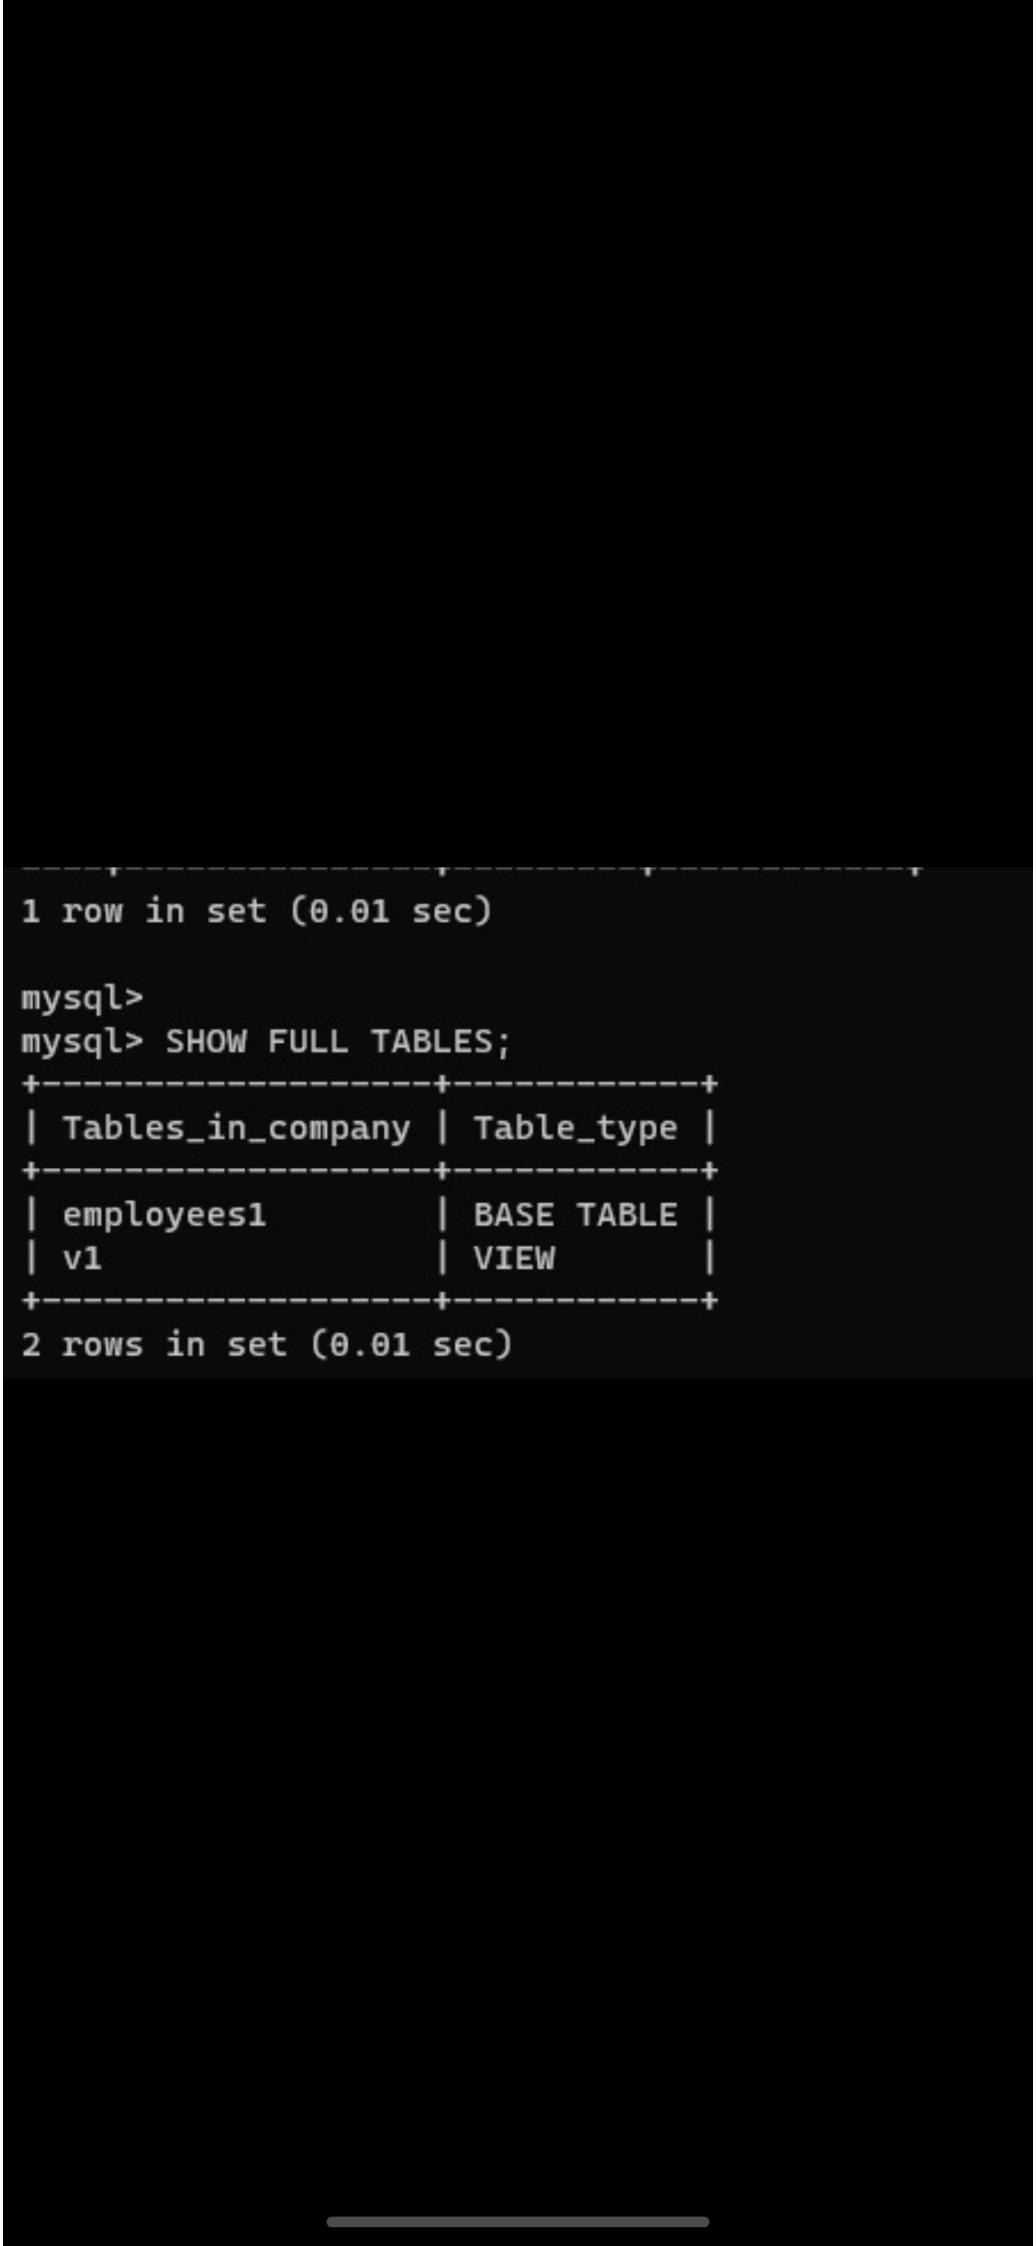

```
----+---------------+---------+------------+
1 row in set (0.01 sec)

mysql>
mysql> SHOW FULL TABLES;
+------------------+------------+
| Tables_in_company | Table_type |
+------------------+------------+
| employees1        | BASE TABLE |
| v1                | VIEW       |
+------------------+------------+
2 rows in set (0.01 sec)
```