Runtime and source size

Eight implementations | geometric means across eight shared problems
Both x2c columns use ordinary threads in six workloads; thresholds are program-specific.

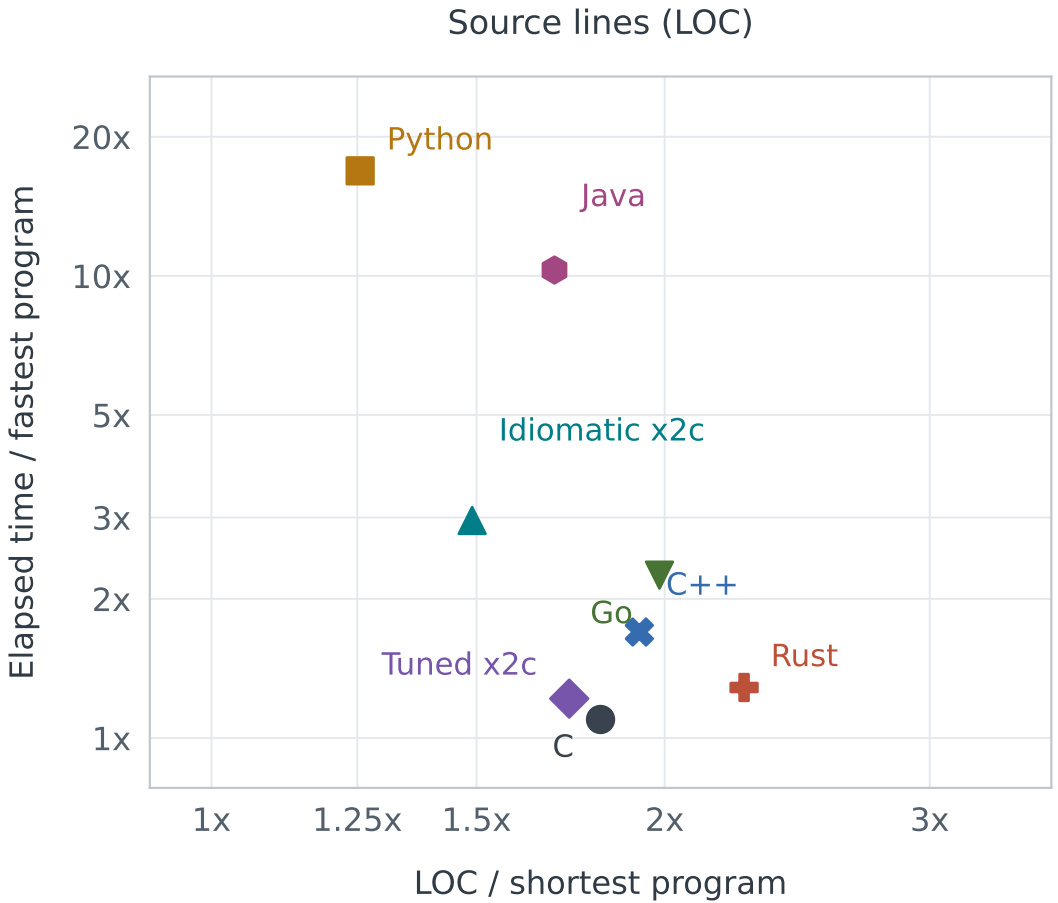

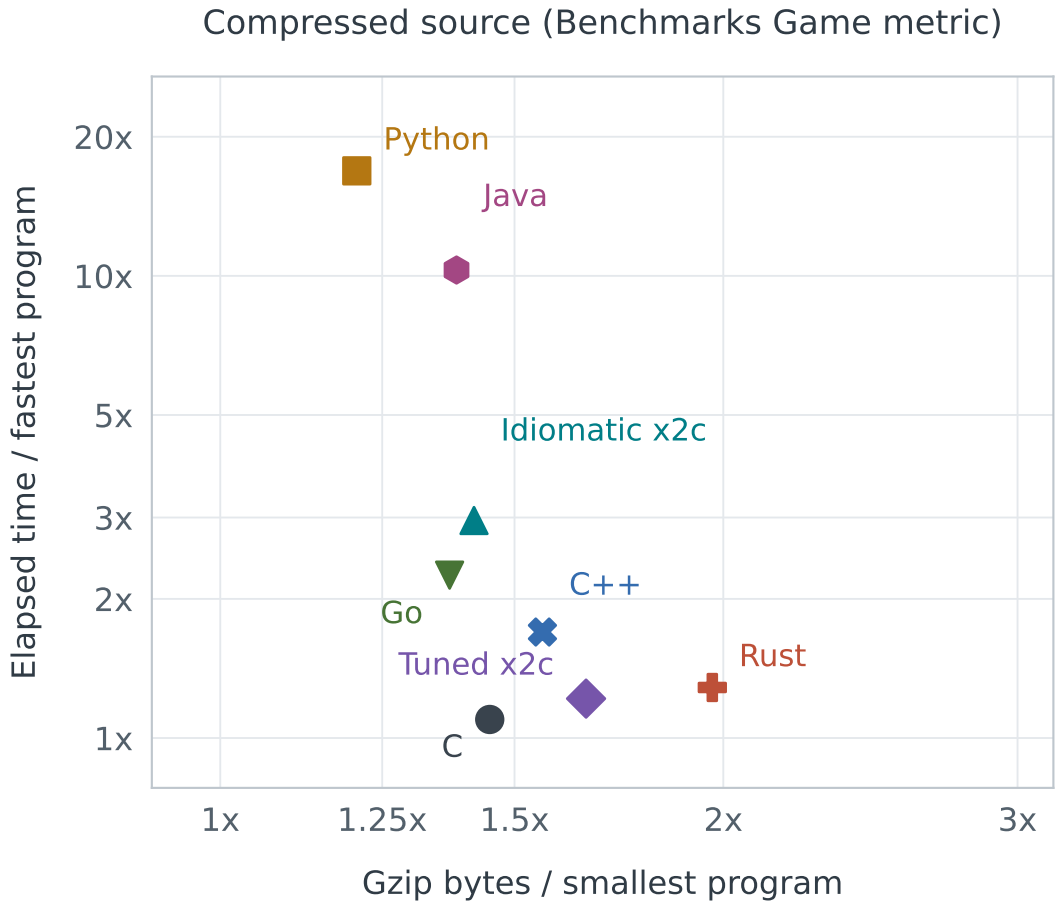

Apple M4 Max | local inputs | 12-sample fresh x2c medians; foreign references pinned | run 20261101T204543Z
Normalize each problem against the best of these eight; Java includes JVM startup and JIT compilation; these are local measurements.