Runtime and source size (linear scales)

8 implementations | geometric means across 8 shared problems

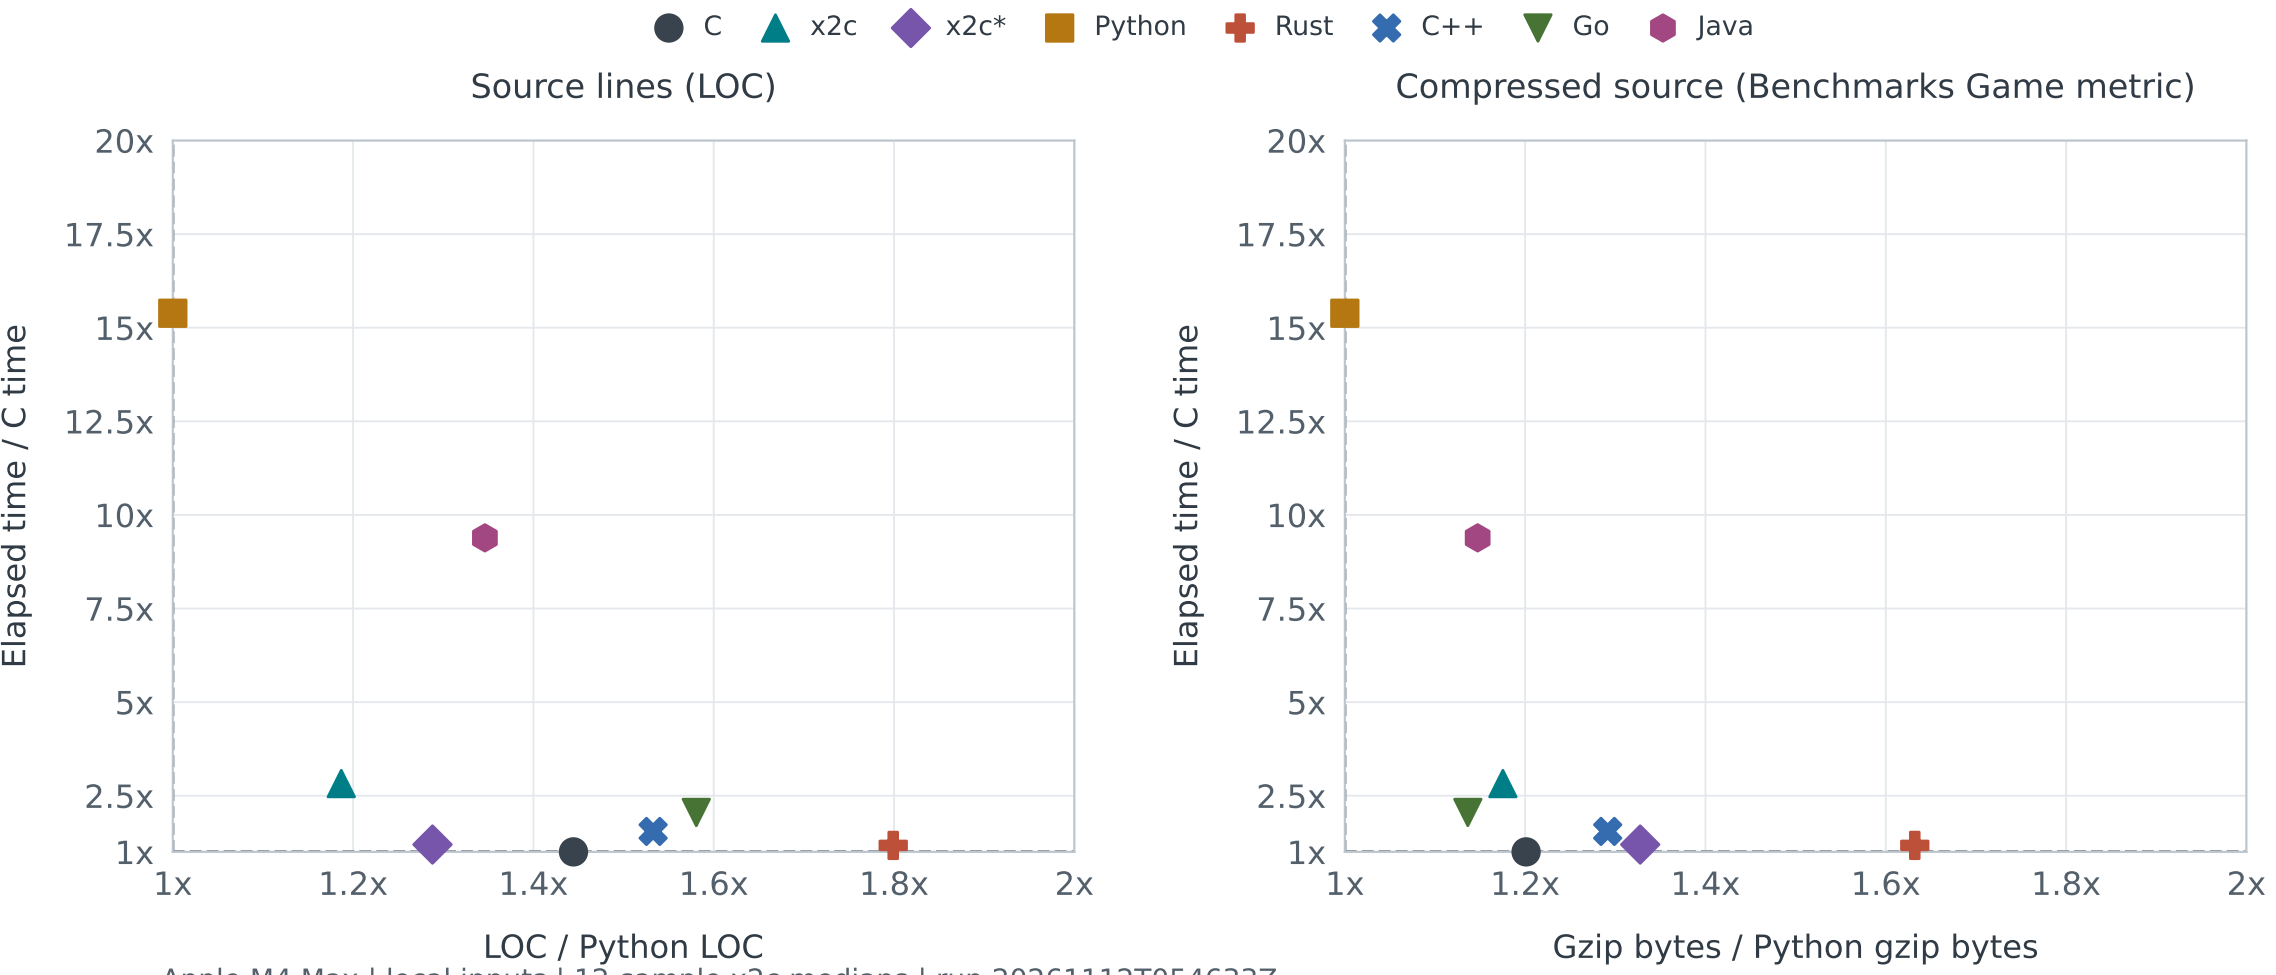

Apple M4 Max | local inputs | 12-sample x2c medians | run 20261112T054633Z
Dashed lines: C time = 1x; Python source size = 1x. Java includes JVM startup and JIT compilation; these are local measurements.
x2c* = tuned x2c; x2c = idiomatic x2c.