Official reference audit and idiomatic k-nucleotide probe

Local profile | quiet eight-round rotating confirmation | eight elapsed-time samples per program

Each candidate is divided by its own language/problem before baseline. Below 1x is faster.

C · Idiomatic x2c · Python · Rust · C++ · Go · Java

n-body

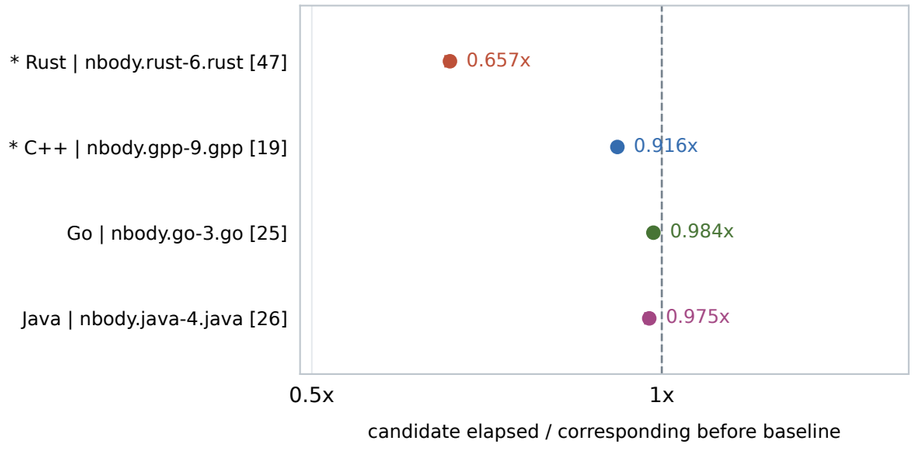

spectral-norm

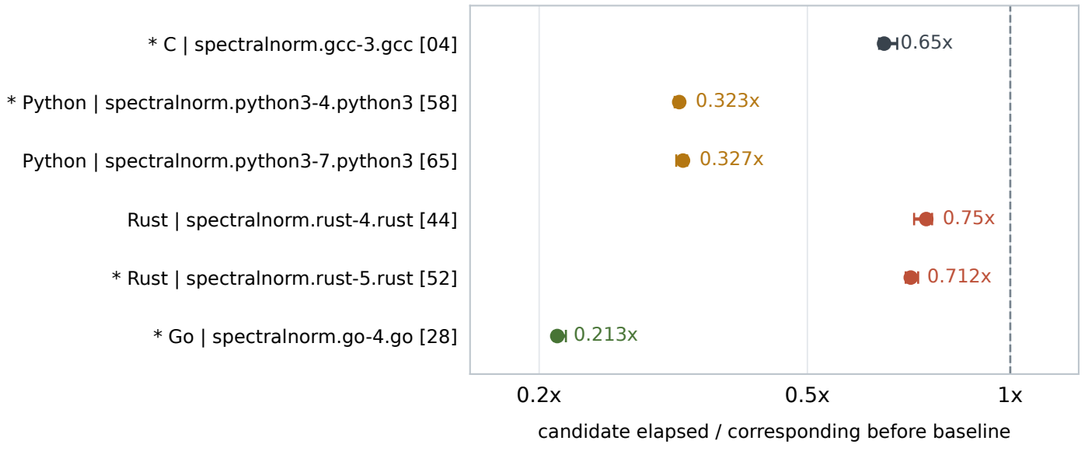

fannkuch-redux

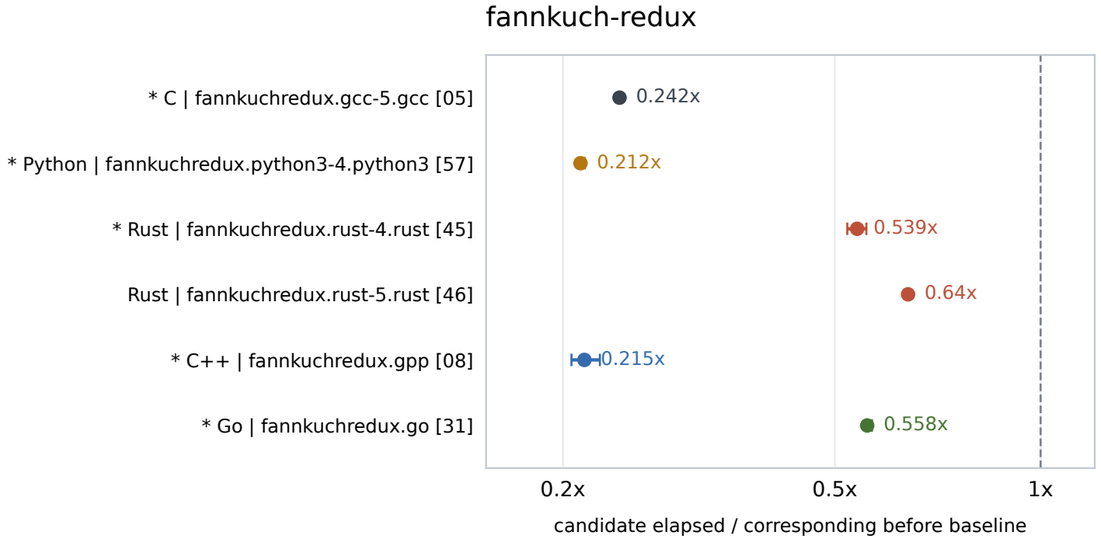

mandelbrot

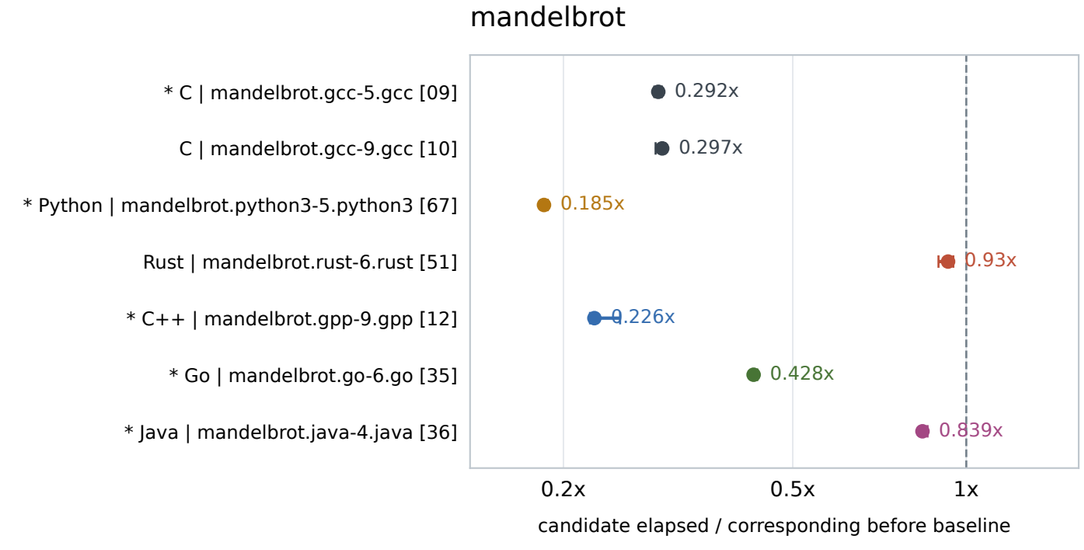

fasta

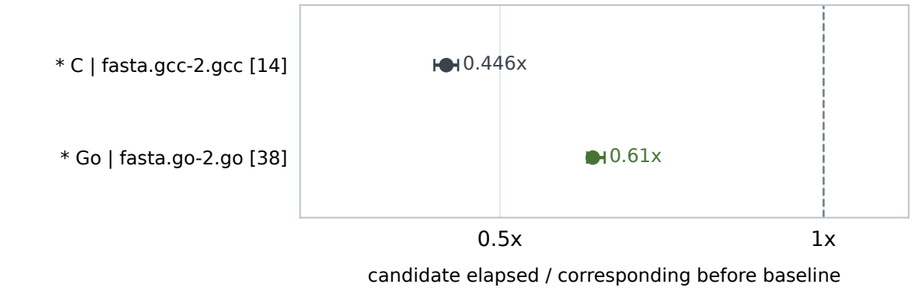

reverse-complement

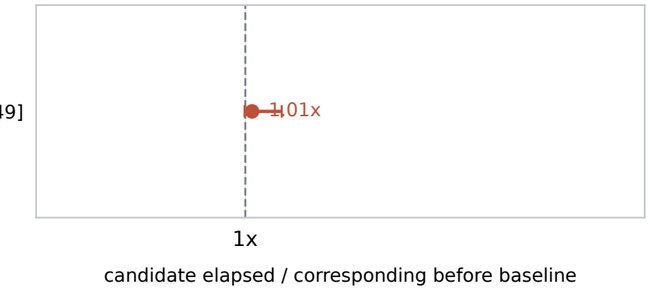

binary-trees

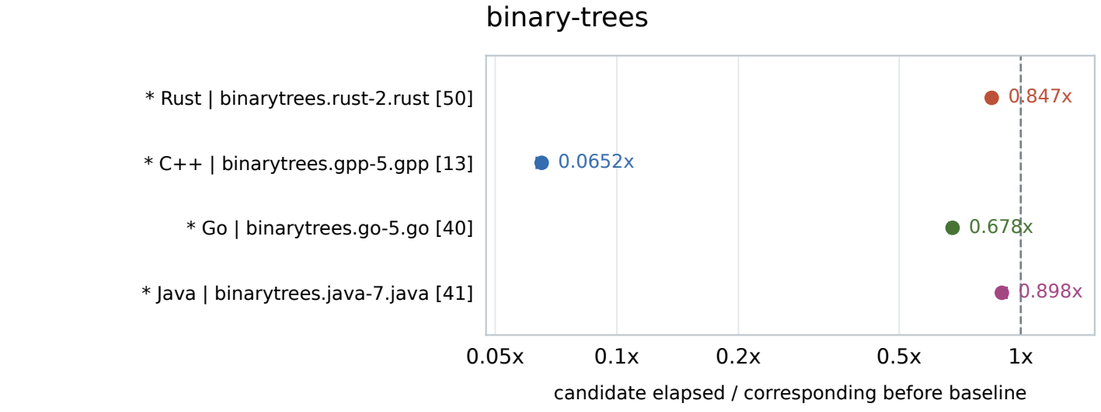

regex-redux

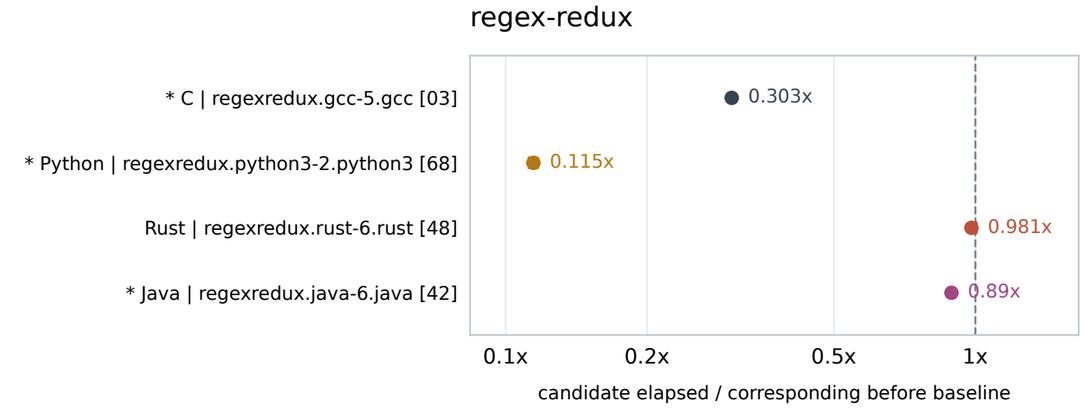

pidigits

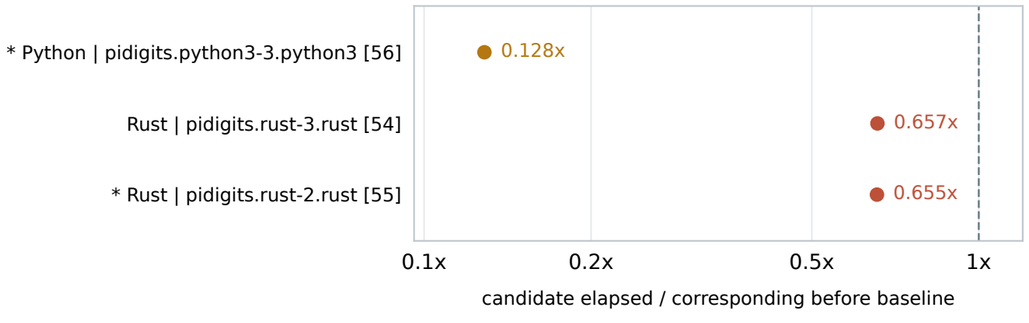

k-nucleotide

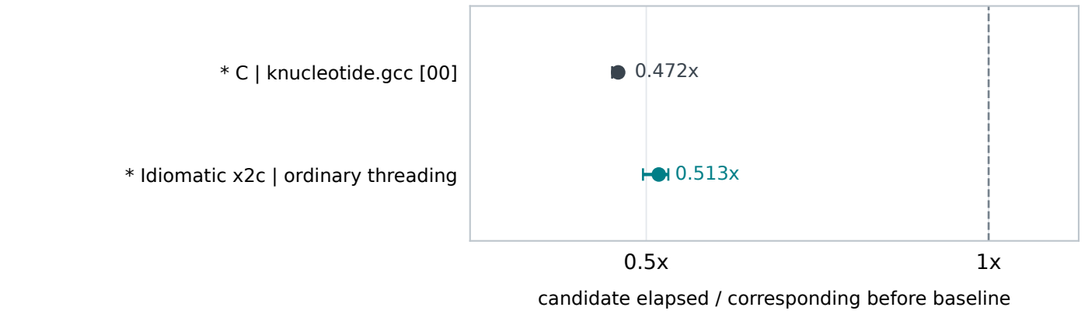

* adopted. Dots: median; whiskers: candidate interquartile range divided by baseline median. Absolute medians are in the CSV.

Focused probes are separate from full-suite calibration. Java includes fresh-JVM startup/JIT. Canonical-size timing remains unrun.