


전체 구성

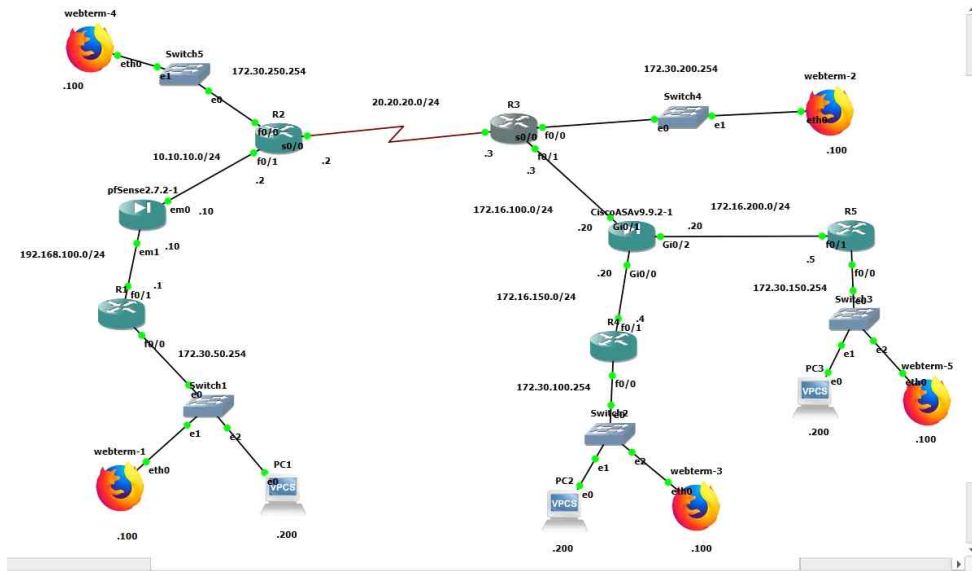


R5 -> dmz : ssh 접속 가능

```

R5#ssh -l admin 172.16.200.20


Password:
User admin logged in to ciscoasa
Logins over the last 1 days: 2. Last login: 06:30:37 UTC May 8 2026 from 172.16.200.5
Failed logins since the last login: 0.
Type help or '?' for a list of available commands.
ciscoasa>
    
```

webterm 2 -> outside : https접속 가능

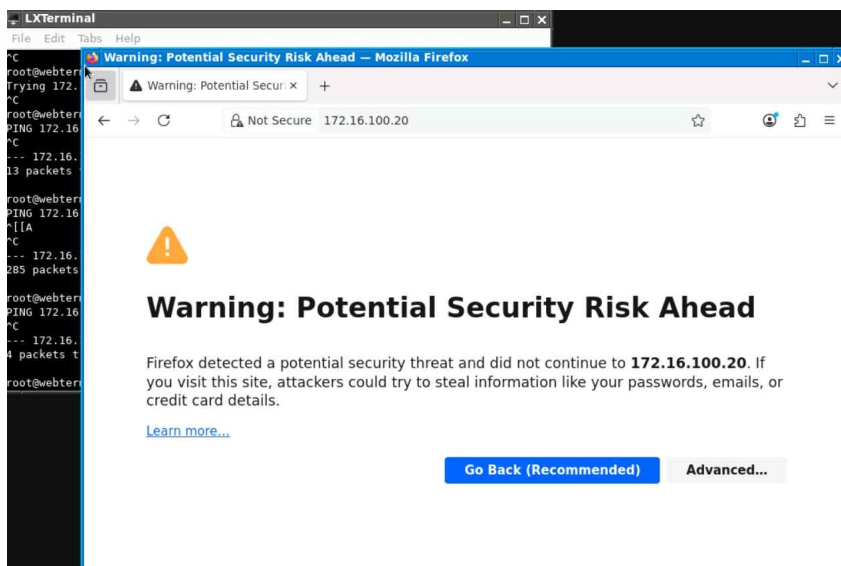


R3 -> R5 http 접속 가능

```
R3#telnet 172.16.200.5 80
Trying 172.16.200.5, 80 ... Open
```

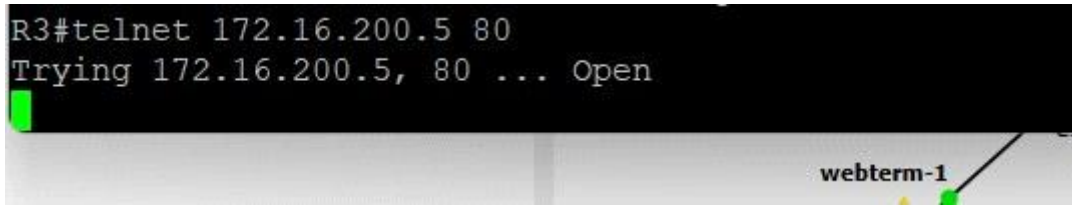


firefox -> PC2 : Ping 가능

```
root@webterm-5:~# ping 172.30.100.200
PING 172.30.100.200 (172.30.100.200) 56(84) bytes of data.
64 bytes from 172.30.100.200: icmp_seq=2 ttl=62 time=42.3 ms
64 bytes from 172.30.100.200: icmp_seq=3 ttl=62 time=26.3 ms
64 bytes from 172.30.100.200: icmp_seq=4 ttl=62 time=35.2 ms
64 bytes from 172.30.100.200: icmp_seq=5 ttl=62 time=29.9 ms
^C
--- 172.30.100.200 ping statistics ---
```

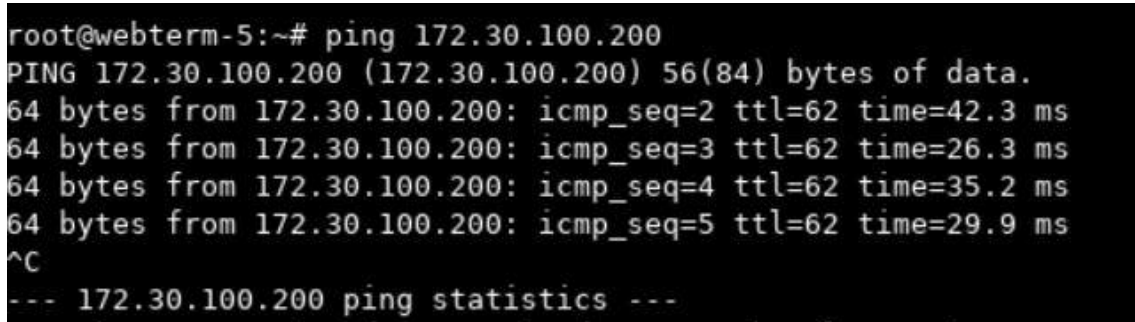

VPN 접속

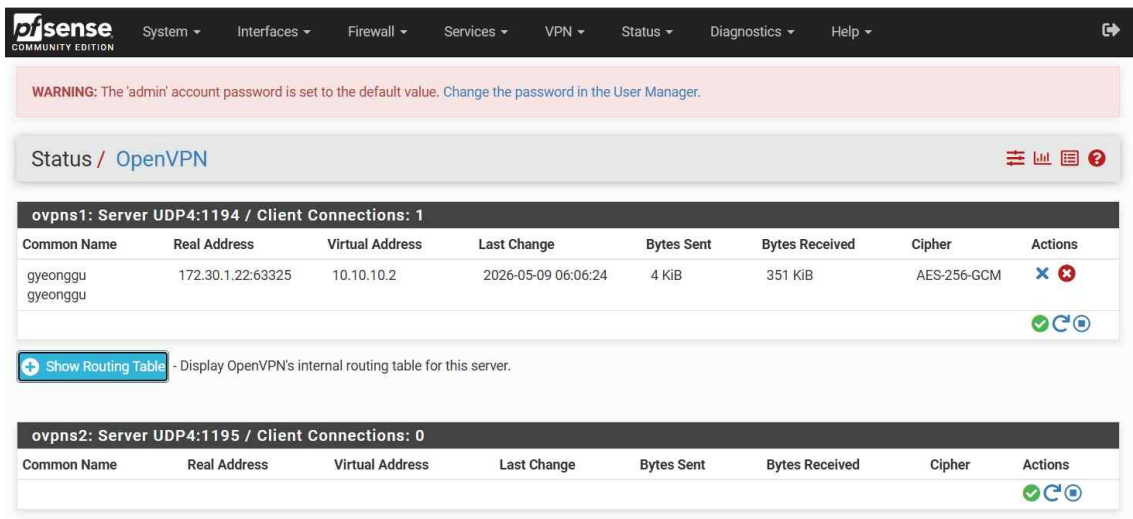

WARNING: The 'admin' account password is set to the default value. [Change the password in the User Manager.](#)

Status / [OpenVPN](#)

ovpns1: Server UDP4:1194 / Client Connections: 1

Common Name	Real Address	Virtual Address	Last Change	Bytes Sent	Bytes Received	Cipher	Actions
gyeonggu	172.30.1.22:63325	10.10.10.2	2026-05-09 06:06:24	4 KiB	351 KiB	AES-256-GCM	X +

[Show Routing Table](#) - Display OpenVPN's internal routing table for this server.

ovpns2: Server UDP4:1195 / Client Connections: 0

Common Name	Real Address	Virtual Address	Last Change	Bytes Sent	Bytes Received	Cipher	Actions
-------------	--------------	-----------------	-------------	------------	----------------	--------	---------

R2 -> R1 : http 허용

webterm-4 → PC1 : ICMP 허용

Floating WAN LAN

R2#telnet 192.168.100.1 80
Trying 192.168.100.1, 80 ...
% Connection timed out; remote host not responding

R2#telnet 192.168.100.1 80
Trying 192.168.100.1, 80 ... Open

Rules (Drag to Change Order)

☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☐	✓ 1/256 B	IPv4 TCP	10.10.10.0/24	*	192.168.100.0/24	80 (HTTP)	*	none			
☐	✓ 0/0 B	IPv4 ICMP echorep	172.30.250.100	*	172.30.50.200	*	*	none			
☐	✓ 0/0 B	IPv4 TCP	*	*	192.168.100.1	80 (HTTP)	*	none		NAT	

↑ Add

↓ Add

Delete

Toggle

Copy

Save

Separator

```
PC1> ping 172.30.250.100
*172.30.50.254 icmp_seq=1 ttl=255 time=9.225 ms (ICMP type:3, code:1, Destination host unreachable)
*172.30.50.254 icmp_seq=2 ttl=255 time=5.023 ms (ICMP type:3, code:1, Destination host unreachable)
*172.30.50.254 icmp_seq=3 ttl=255 time=7.635 ms (ICMP type:3, code:1, Destination host unreachable)
PC1>
```