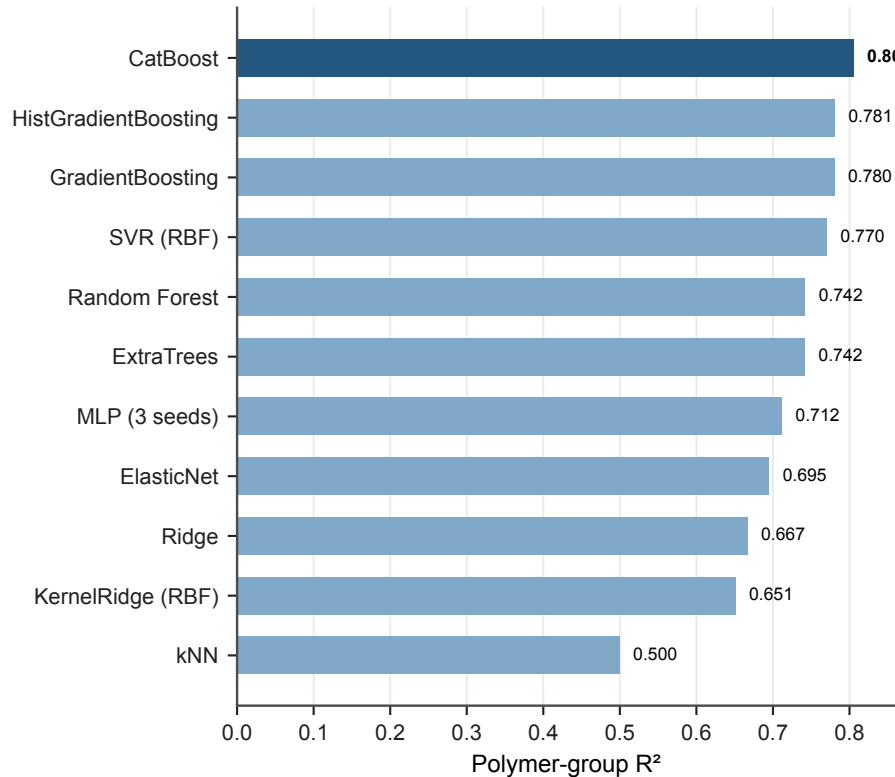
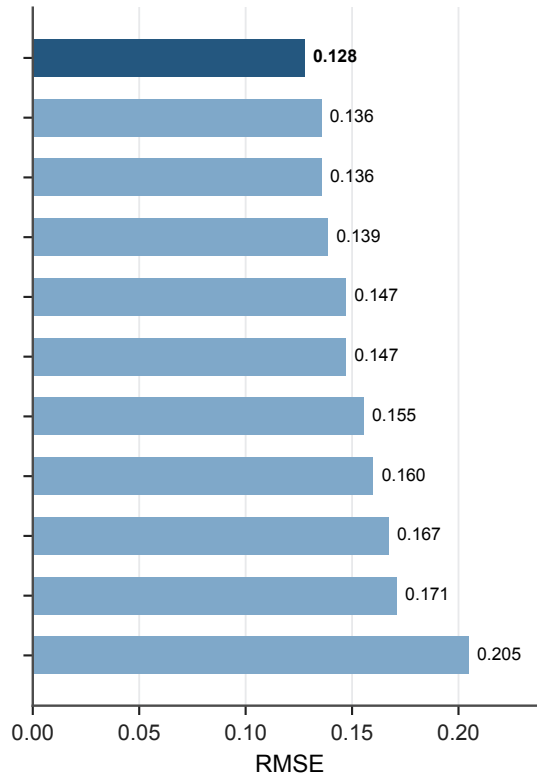
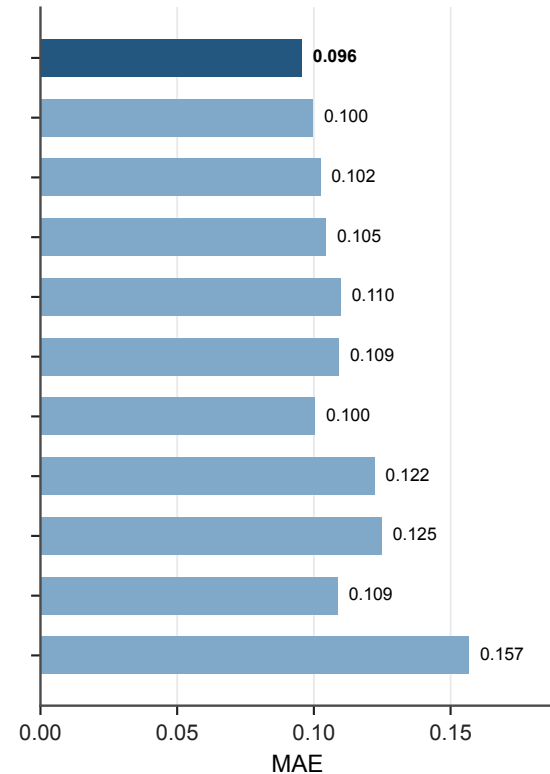


A Model benchmark (R^2)**B** Model benchmark (RMSE)**C** Model benchmark (MAE)

All fixed model-family checks use the same polymer folds and training-fold-only preprocessing/feature selection; model-specific scaling, MLP target scaling, and small baseline hyperparameter grids are fitted within training folds when required.