


Does sample-level RNA improve group-percentage prediction?

1,898 RNA records | 28 group labels | 14 donor-aware source-held-out blocks

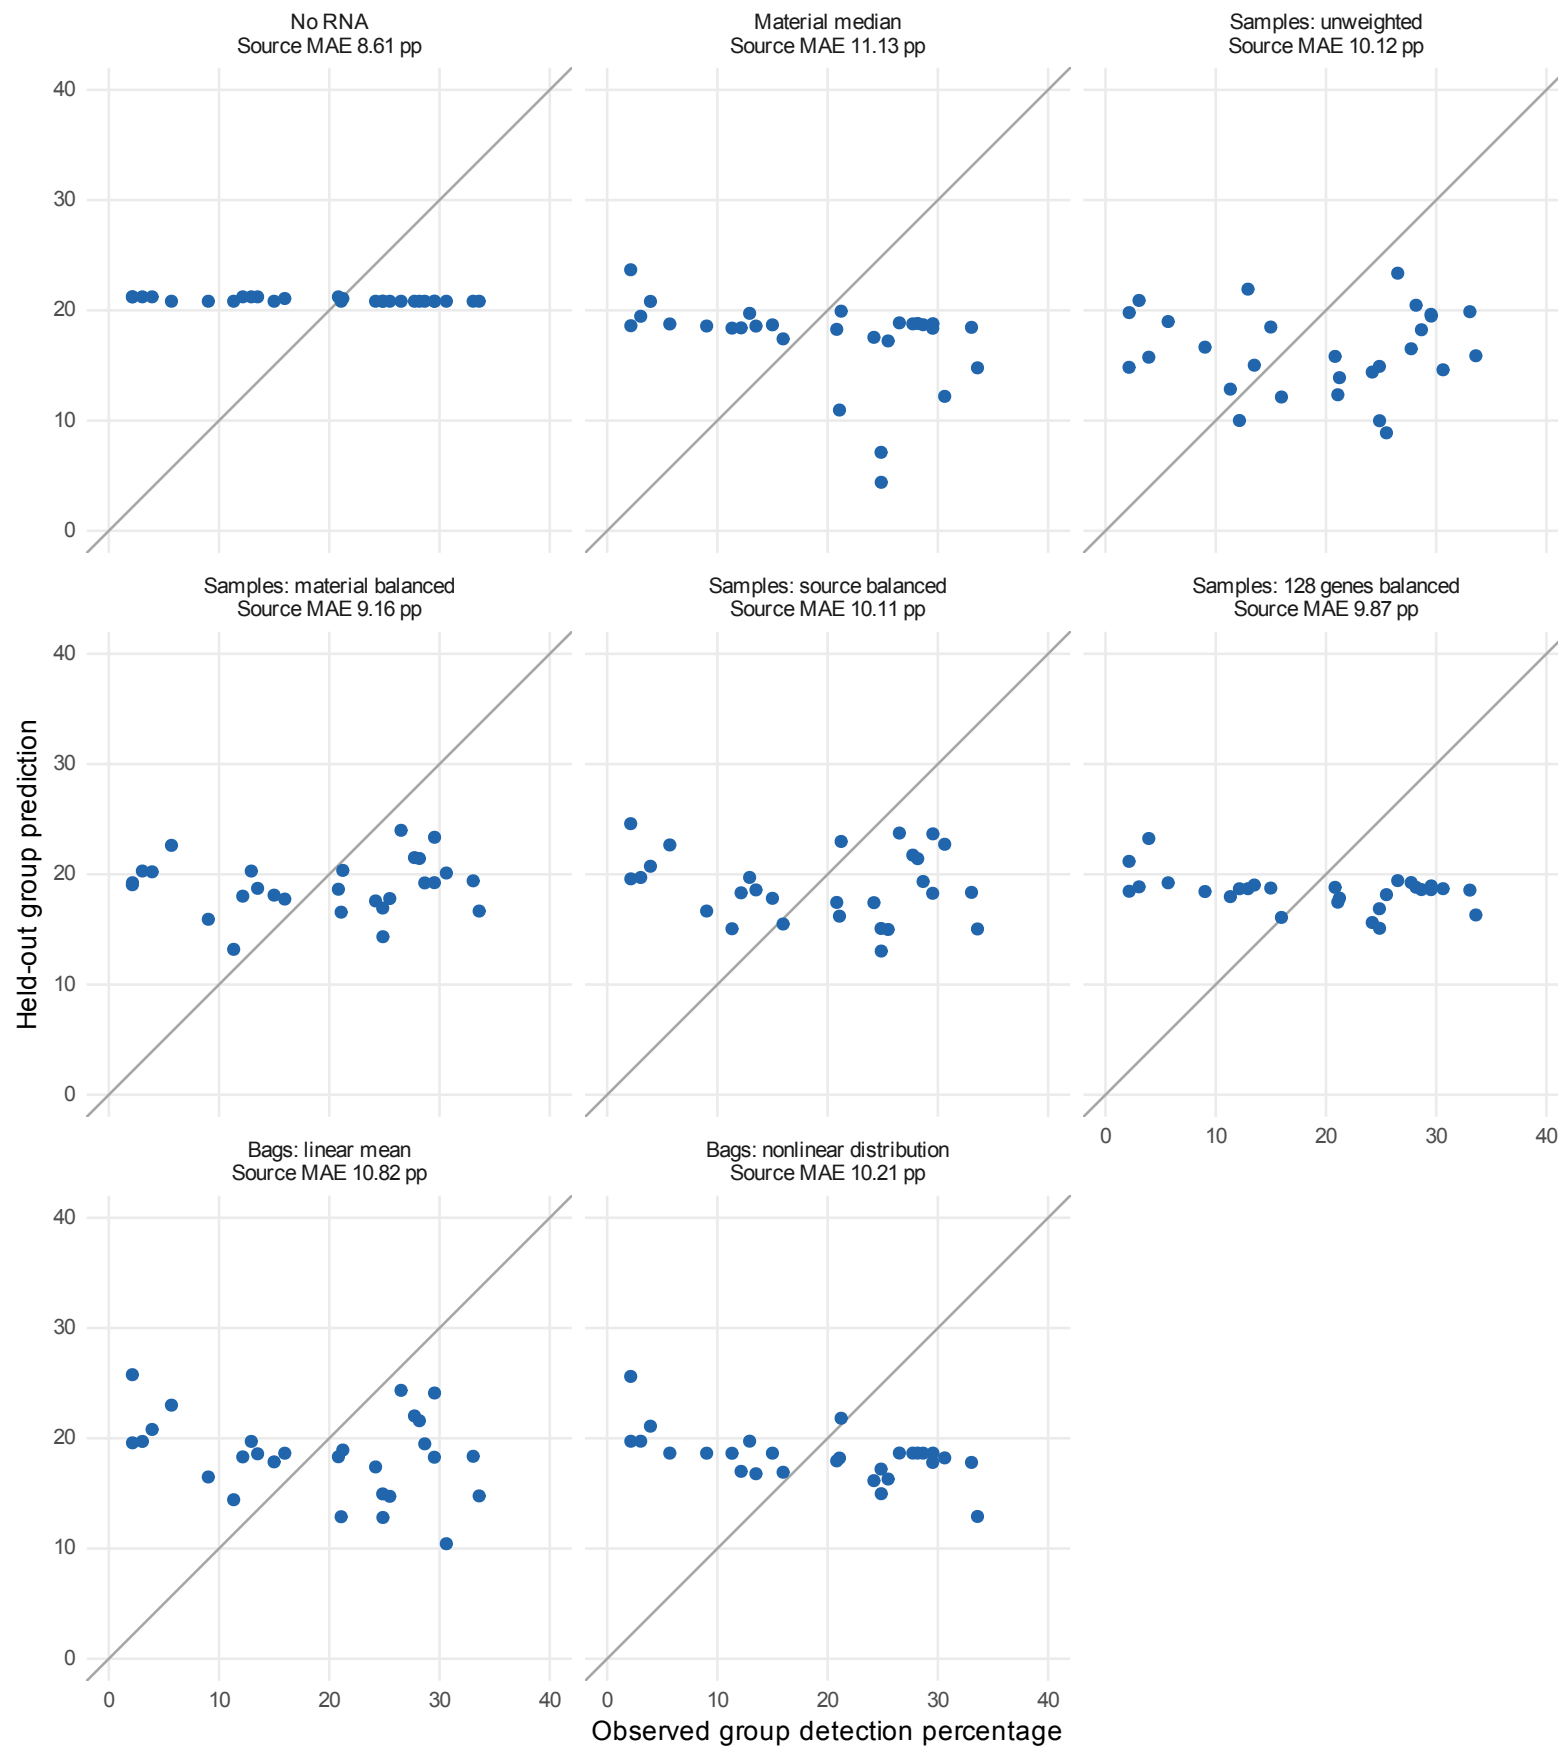

All models use the same source splits and target labels. Sample scores are averaged within material before evaluation.
No individual RNA sample has a matched protein percentage; bag regression uses sample distributions.