

guard.

2. **Round 1 (implement).** The model emits the implement batch, including `insert_cell`, `edit_cell_by_index`, `delete_by_index`, and `run_cell`. Redundant query tools are stripped. The host reorders bulk positional operations, then dispatches the batch in fire-and-forget mode.

This protocol is *not* a full ReAct loop (Yao et al., 2023): the host does not feed per-cell execution results back into a third model turn within the same user message. Future work may add such a loop using scrape-based observers (Section 6.4). Figure 3.9 summarises the Agentic mode workflow.

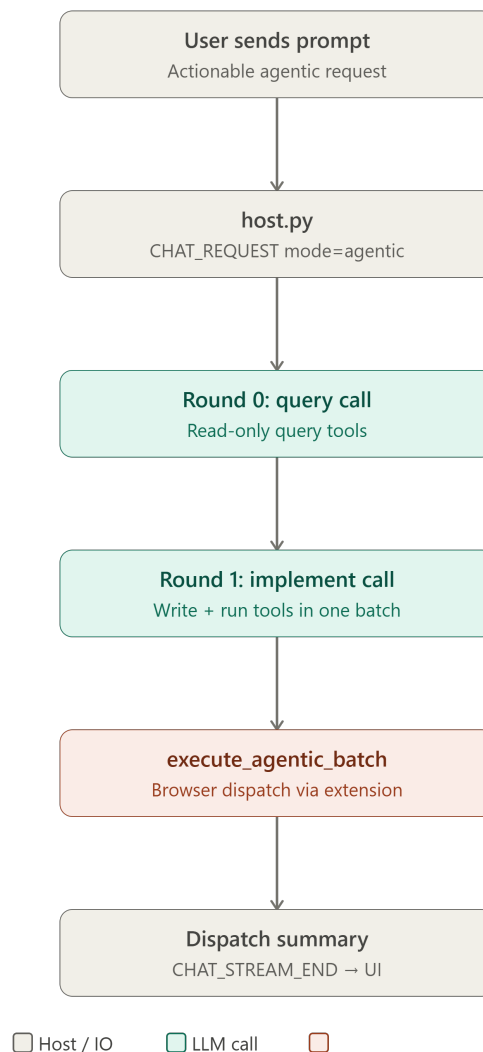


Figure 3.9: Agentic mode workflow (two-phase query and implement with tool dispatch).