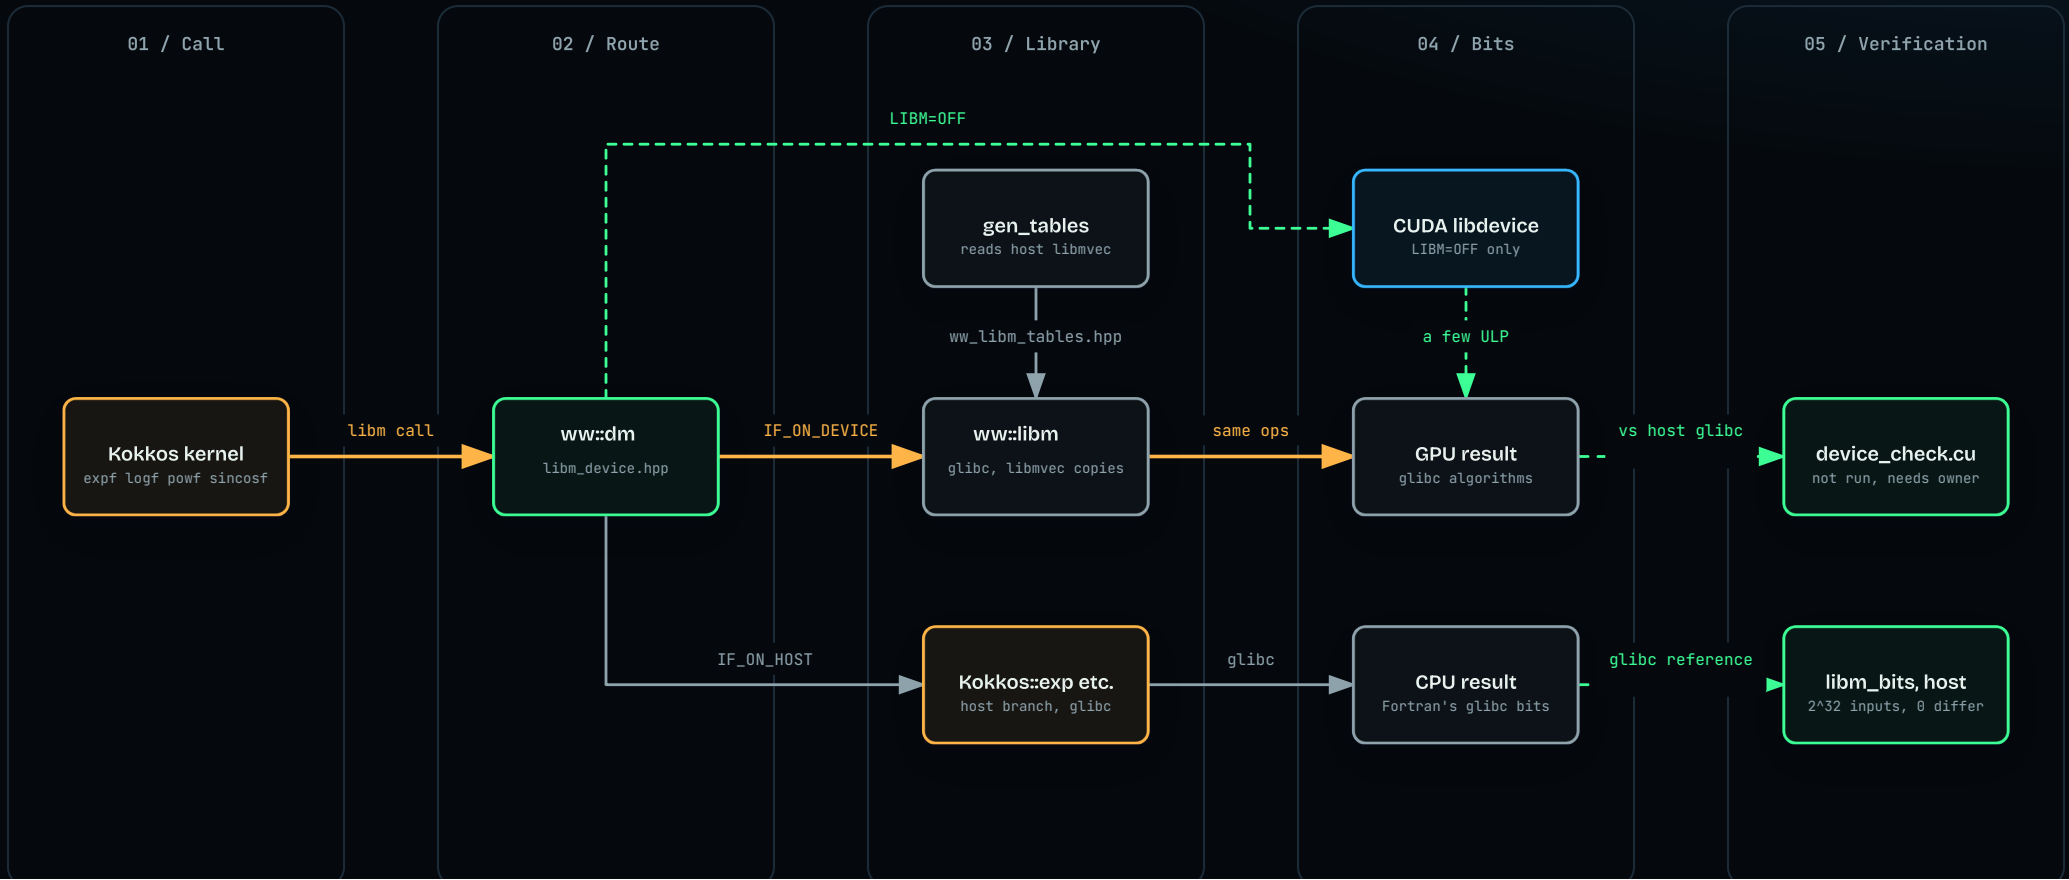
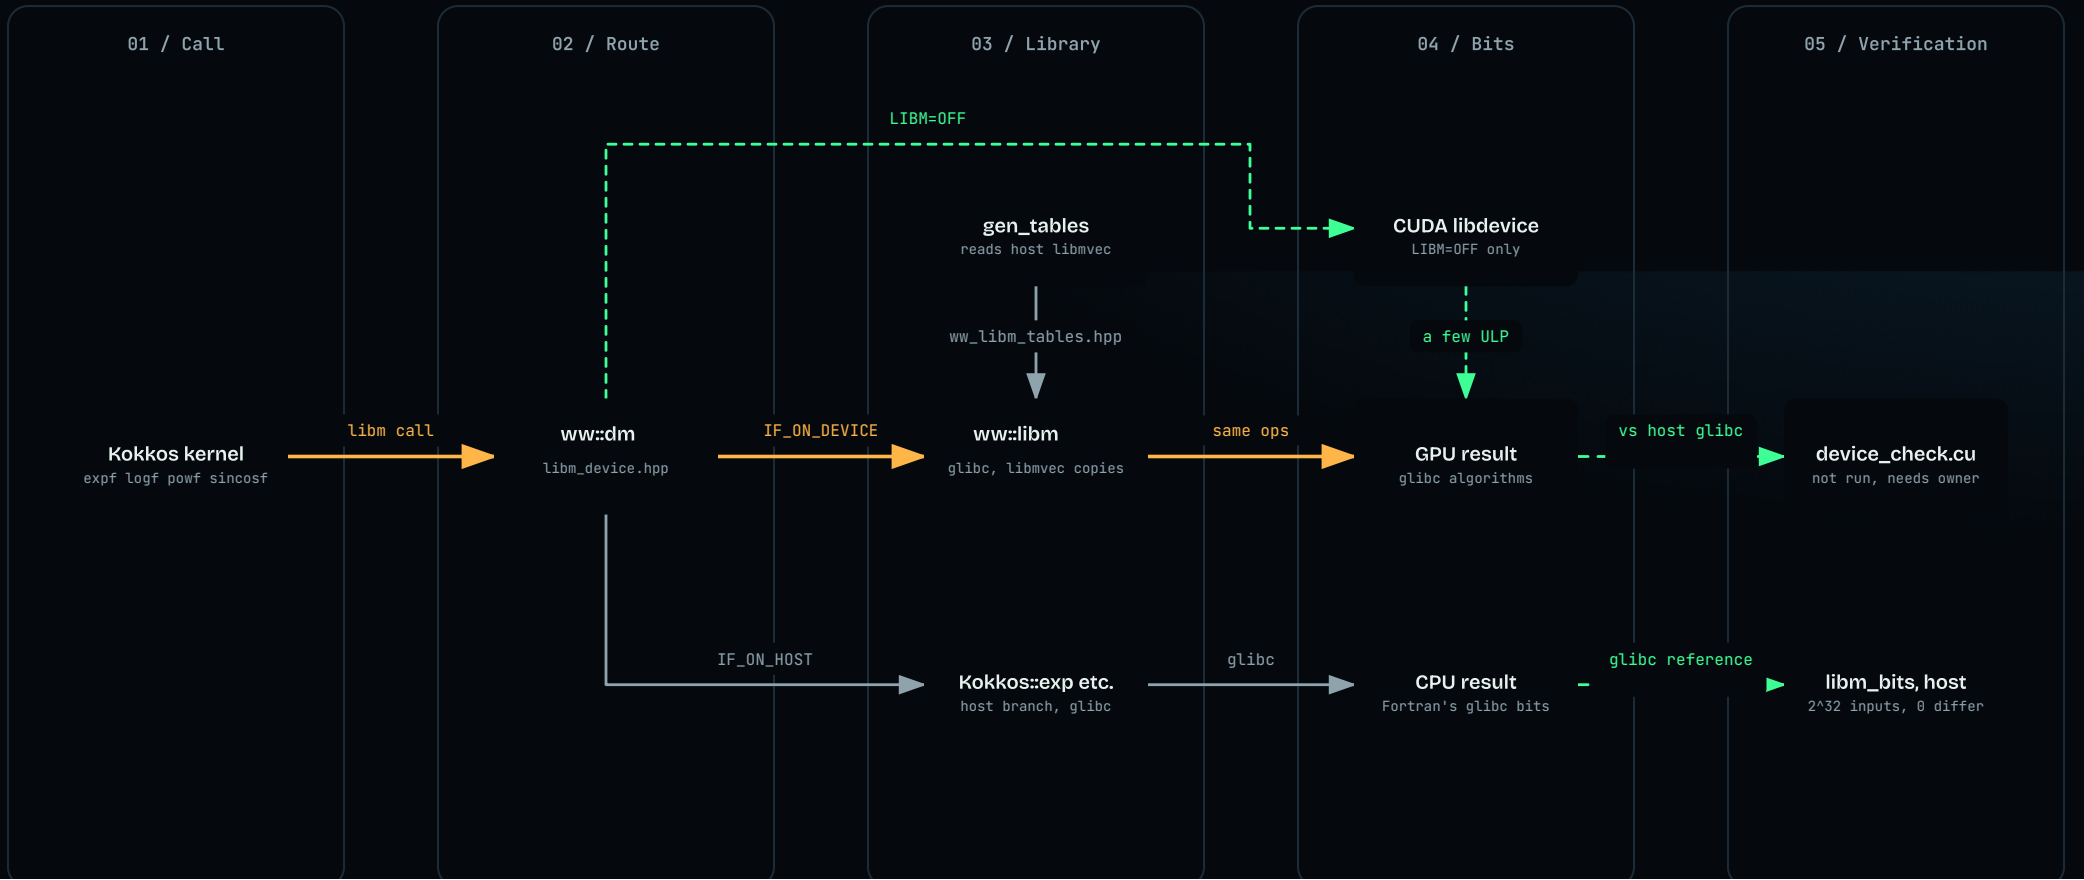

01 / Call
02 / Route
03 / Library
04 / Bits
05 / Verification
LIBM=OFF
gen_tables
reads host libmvec
CUDA libdevice
LIBM=OFF only
ww_libm_tables.hpp
a few ULP
Kokkos kernel
expf logf powf sincosf
libm call
ww::dm
libm_device.hpp
IF_ON_DEVICE
ww::libm
glibc, libmvec copies
same ops
GPU result
glibc algorithms
vs host glibc
device_check.cu
not run, needs owner
IF_ON_HOST
Kokkos::exp etc.
host branch, glibc
glibc
CPU result
Fortran's glibc bits
glibc reference
libm_bits, host
2^32 inputs, 0 differ


01 / Call
02 / Route
03 / Library
04 / Bits
05 / Verification
LIBM=OFF
gen_tables
reads host libmvec
CUDA libdevice
LIBM=OFF only
ww_libm_tables.hpp
a few ULP
Kokkos kernel
expf logf powf sincosf
libm call
ww::dm
libm_device.hpp
IF_ON_DEVICE
ww::libm
glibc, libmvec copies
same ops
GPU result
glibc algorithms
vs host glibc
device_check.cu
not run, needs owner
IF_ON_HOST
Kokkos::exp etc.
host branch, glibc
glibc
CPU result
Fortran's glibc bits
glibc reference
libm_bits, host
2^32 inputs, 0 differ