


## Eisdiagramm

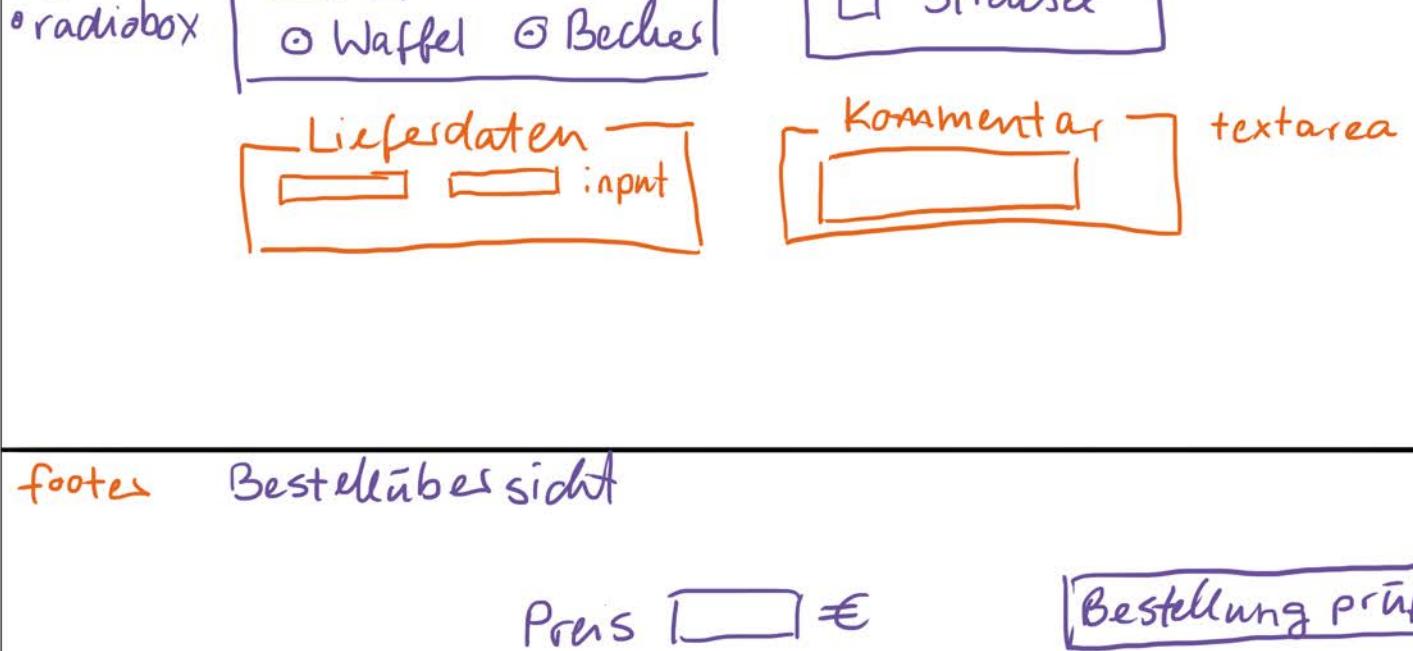


Footer: Bestellübersicht

Preis [ ] €

Bestellung prüfen

## Anwendungsfalldiagramm

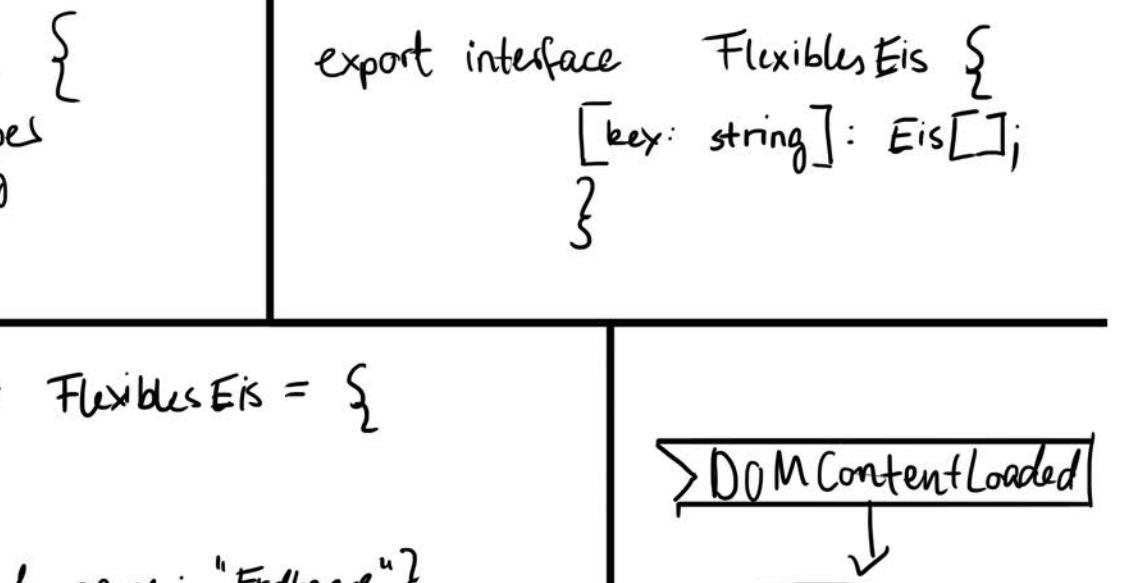

interface Eis {

  preis: number  
  name: string

export interface FlexiblesEis {

[key: string]: Eis[];

Eissorten: FlexiblesEis = {

sorten": [

{ preis: 1, name: "Erdbeere" },

{ preis: 1.5, name: "Melone" }

],

toppings": [

{ preis: 0.8, name: "Schokostreusel" },

{ preis: 1, name: "Gummibärchen" }

],

...

&gt; DOMContentLoaded

init +



init — event: Event

display FlexiblesEis (eissorten)

+

(empty circle)

display FlexiblesEis

— eissortenkategorie: FlexiblesEis

for [key in — eissortenkategorie]

(empty circle)

zwischen speicher: Eis[]

= eissortenkategorie[key]

let: i: number = 0

i++

writeHTML Eisgenerieren

(Array durchlaufen)

+

(empty circle)

i++

writeHTML Eisgenerieren

(Array durchlaufen)

(empty circle)&lt;/