

Lab_13

Hadia Beshir

Section 1. Differential Expression Analysis

Load our data files

```
library(DESeq2)
```

```
Loading required package: S4Vectors
```

```
Loading required package: stats4
```

```
Loading required package: BiocGenerics
```

```
Loading required package: generics
```

```
Attaching package: 'generics'
```

```
The following objects are masked from 'package:base':
```

```
as.difftime, as.factor, as.ordered, intersect, is.element, setdiff,  
setequal, union
```

```
Attaching package: 'BiocGenerics'
```

```
The following objects are masked from 'package:stats':
```

```
IQR, mad, sd, var, xtabs
```

The following objects are masked from 'package:base':

```
anyDuplicated, aperm, append, as.data.frame, basename, cbind,  
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,  
get, grep, grepl, is.unsorted, lapply, Map, mapply, match, mget,  
order, paste, pmax, pmax.int, pmin, pmin.int, Position, rank,  
rbind, Reduce, rownames, sapply, saveRDS, table, tapply, unique,  
unsplit, which.max, which.min
```

Attaching package: 'S4Vectors'

The following object is masked from 'package:utils':

```
findMatches
```

The following objects are masked from 'package:base':

```
expand.grid, I, unname
```

Loading required package: IRanges

Loading required package: GenomicRanges

Loading required package: Seqinfo

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

```
colAlls, colAnyNAs, colAnys, colAvgsPerRowSet, colCollapse,
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
colWeightedMeans, colWeightedMedians, colWeightedSds,
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgsPerColSet,
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
rowWeightedSds, rowWeightedVars
```

Loading required package: Biobase

Welcome to Bioconductor

```
Vignettes contain introductory material; view with
'browseVignettes()'. To cite Bioconductor, see
'citation("Biobase")', and for packages 'citation("pkgname")'.
```

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

```
rowMedians
```

The following objects are masked from 'package:matrixStats':

```
anyMissing, rowMedians
```

```
metaFile <- "GSE37704_metadata.csv"
countFile <- "GSE37704_featurecounts.csv"

colData = read.csv(metaFile, row.names=1)
head(colData)
```

```

condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369 hoxa1_kd
SRR493370 hoxa1_kd
SRR493371 hoxa1_kd

```

```

# Import countdata
countData = read.csv(countFile, row.names=1)
head(countData)

```

```

length SRR493366 SRR493367 SRR493368 SRR493369 SRR493370
ENSG00000186092 918 0 0 0 0 0
ENSG00000279928 718 0 0 0 0 0
ENSG00000279457 1982 23 28 29 29 28
ENSG00000278566 939 0 0 0 0 0
ENSG00000273547 939 0 0 0 0 0
ENSG00000187634 3214 124 123 205 207 212
SRR493371
ENSG00000186092 0
ENSG00000279928 0
ENSG00000279457 46
ENSG00000278566 0
ENSG00000273547 0
ENSG00000187634 258

```

Q. Complete the code below to remove the troublesome first column from countData

```

countData <- as.matrix(countData[,-1])
head(countData)

```

```

SRR493366 SRR493367 SRR493368 SRR493369 SRR493370 SRR493371
ENSG00000186092 0 0 0 0 0 0
ENSG00000279928 0 0 0 0 0 0
ENSG00000279457 23 28 29 29 28 46
ENSG00000278566 0 0 0 0 0 0
ENSG00000273547 0 0 0 0 0 0
ENSG00000187634 124 123 205 207 212 258

```

Q. Complete the code below to filter countData to exclude genes (i.e. rows) where we have 0 read count across all samples (i.e. columns).?

```
countData = countData[rowSums(countData) > 1, ]
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000279457	23	28	29	29	28	46
ENSG00000187634	124	123	205	207	212	258
ENSG00000188976	1637	1831	2383	1226	1326	1504
ENSG00000187961	120	153	180	236	255	357
ENSG00000187583	24	48	65	44	48	64
ENSG00000187642	4	9	16	14	16	16

Running DESeq2 Nice now lets setup the DESeqDataSet object required for the DESeq() function and then run the DESeq pipeline. This is again similar to our last day's hands-on session.

```
dds = DESeqDataSetFromMatrix(countData=countData,
                              colData=colData,
                              design=~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

```
dds = DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
dds
```

```
class: DESeqDataSet
dim: 15280 6
metadata(1): version
assays(4): counts mu H cooks
rownames(15280): ENSG00000279457 ENSG00000187634 ... ENSG00000276345
               ENSG00000271254
rowData names(22): baseMean baseVar ... deviance maxCooks
colnames(6): SRR493366 SRR493367 ... SRR493370 SRR493371
colData names(2): condition sizeFactor
```

Next, get results for the HoxA1 knockdown versus control siRNA (remember that these were labeled as “hoxa1_kd” and “control_siRNA” in our original colData metaFile input to DESeq, you can check this above and by running resultsNames(dds) command).

```
res = results(dds)
```

Q. Call the summary() function on your results to get a sense of how many genes are up or down-regulated at the default 0.1 p-value cutoff.

```
summary(res)
```


```
out of 15280 with nonzero total read count
adjusted p-value < 0.1
LFC > 0 (up)      : 4351, 28%
LFC < 0 (down)    : 4399, 29%
outliers [1]      : 0, 0%
low counts [2]    : 590, 3.9%
(mean count < 1)
[1] see 'cooksCutoff' argument of ?results
[2] see 'independentFiltering' argument of ?results
```

Volcano Plot

```
library(ggplot2)

ggplot(as.data.frame(res)) +
  aes(log2FoldChange,
      -log10(padj)) +
  geom_point()
```

Warning: Removed 590 rows containing missing values or values outside the scale range (``geom_point()``).

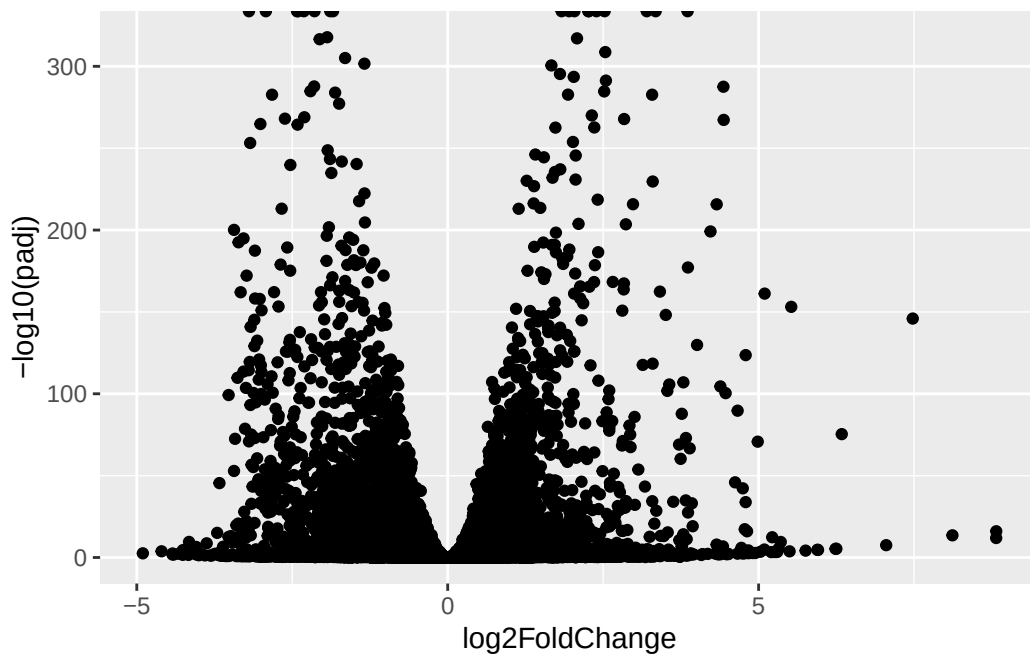

Q. Improve this plot by completing the below code, which adds color, axis labels and cutoff lines:


```
mycols <- rep("gray", nrow(res))

mycols[ abs(res$log2FoldChange) > 2 ] <- "blue"

mycols[ res$padj > 0.01 ] <- "gray"

ggplot(as.data.frame(res)) +
  aes(log2FoldChange,
      -log10(padj)) +
  geom_point(col=mycols) +
  xlab("Log2(FoldChange)") +
  ylab("-Log(P-value)") +
  geom_vline(xintercept = c(-2,2)) +
  geom_hline(yintercept = -log10(0.01))
```

Warning: Removed 590 rows containing missing values or values outside the scale range (``geom_point()``).

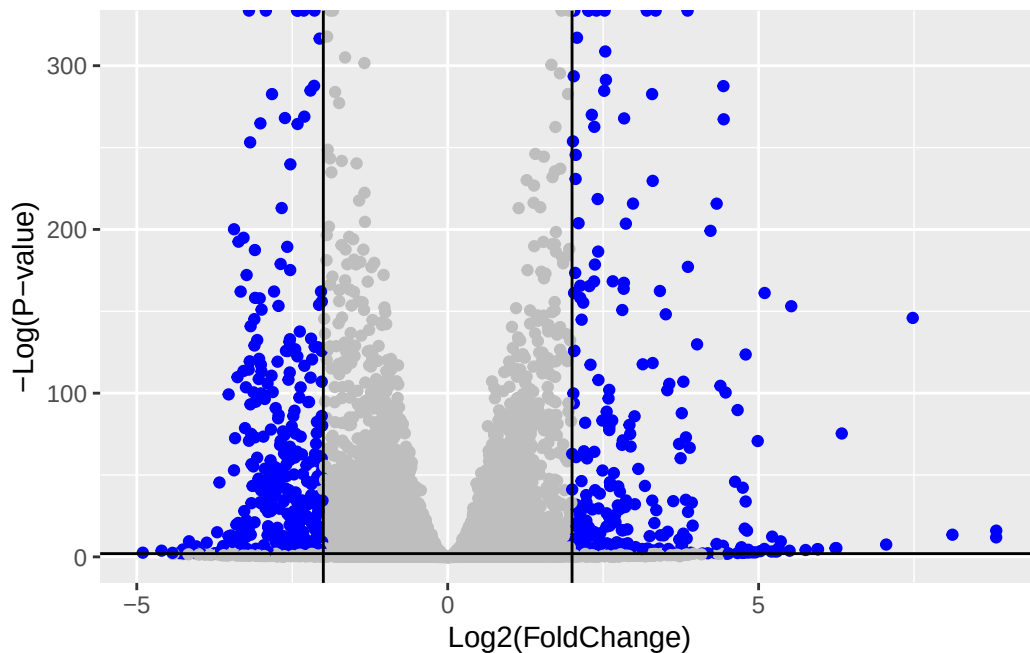

Adding gene annotation

Q. Use the `mapIDs()` function multiple times to add **SYMBOL**, **ENTREZID** and **GENENAME** annotation to our results by completing the code below.

```
library("AnnotationDbi")
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

```
[1] "ACCNUM"      "ALIAS"       "ENSEMBL"     "ENSEMBLPROT" "ENSEMBLTRANS"
[6] "ENTREZID"    "ENZYME"      "EVIDENCE"    "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"    "GO"          "GOALL"       "IPI"          "MAP"
[16] "OMIM"        "ONTOLOGY"    "ONTOLOGYALL" "PATH"         "PFAM"
[21] "PMID"        "PROSITE"     "REFSEQ"      "SYMBOL"       "UCSCKG"
[26] "UNIPROT"
```



```
res$symbol = mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
                    column="SYMBOL",
                    multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
                    column="ENTREZID",
                    multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$name = mapIds(org.Hs.eg.db,
                  keys=row.names(res),
                  keytype="ENSEMBL",
                  column="GENENAME",
                  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res, 10)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 10 rows and 9 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.9798	0.5428105	0.5215598	1.040744	2.97994e-01
ENSG00000188290	108.9221	2.0570638	0.1969053	10.446970	1.51282e-25
ENSG00000187608	350.7169	0.2573837	0.1027266	2.505522	1.22271e-02

ENSG00000188157	9128.4394	0.3899088	0.0467163	8.346304	7.04321e-17
ENSG00000131591	156.4791	0.1965923	0.1456109	1.350121	1.76977e-01
	padj	symbol	entrez		name
	<numeric>	<character>	<character>		<character>
ENSG00000279457	6.85033e-01	NA	NA		NA
ENSG00000187634	5.14039e-03	SAMD11	148398	sterile alpha motif ..	
ENSG00000188976	1.75974e-35	NOC2L	26155	NOC2 like nucleolar ..	
ENSG00000187961	1.13044e-07	KLHL17	339451	kelch like family me..	
ENSG00000187583	9.19159e-01	PLEKHN1	84069	pleckstrin homology ..	
ENSG00000187642	4.02066e-01	PERM1	84808	PPARGC1 and ESRR ind..	
ENSG00000188290	1.30113e-24	HES4	57801	hes family bHLH tran..	
ENSG00000187608	2.36679e-02	ISG15	9636	ISG15 ubiquitin like..	
ENSG00000188157	4.20589e-16	AGRN	375790		agrin
ENSG00000131591	2.60893e-01	C1orf159	54991	chromosome 1 open re..	

Q. Finally for this section let's reorder these results by adjusted p-value and save them to a CSV file in your current project directory.

```
res = res[order(res$pvalue),]
write.csv(res, file="deseq_results.csv")
```

Section 2. Pathway Analysis

```
library(pathview)
```

```
#####
Pathview is an open source software package distributed under GNU General
Public License version 3 (GPLv3). Details of GPLv3 is available at
http://www.gnu.org/licenses/gpl-3.0.html. Particullary, users are required to
formally cite the original Pathview paper (not just mention it) in publications
or products. For details, do citation("pathview") within R.
```

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

```
#####
```

```
library(gage)
```

```
library(gageData)

data(kegg.sets.hs)
data(sigmet.idx.hs)

# Focus on signaling and metabolic pathways only
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

# Examine the first 3 pathways
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
```

```
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
```

```
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
```

```
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"
[17] "114" "115" "122481" "122622" "124583" "132" "158" "159"
[25] "1633" "171568" "1716" "196883" "203" "204" "205" "221823"
[33] "2272" "22978" "23649" "246721" "25885" "2618" "26289" "270"
[41] "271" "27115" "272" "2766" "2977" "2982" "2983" "2984"
[49] "2986" "2987" "29922" "3000" "30833" "30834" "318" "3251"
[57] "353" "3614" "3615" "3704" "377841" "471" "4830" "4831"
[65] "4832" "4833" "4860" "4881" "4882" "4907" "50484" "50940"
[73] "51082" "51251" "51292" "5136" "5137" "5138" "5139" "5140"
[81] "5141" "5142" "5143" "5144" "5145" "5146" "5147" "5148"
[89] "5149" "5150" "5151" "5152" "5153" "5158" "5167" "5169"
[97] "51728" "5198" "5236" "5313" "5315" "53343" "54107" "5422"
[105] "5424" "5425" "5426" "5427" "5430" "5431" "5432" "5433"
[113] "5434" "5435" "5436" "5437" "5438" "5439" "5440" "5441"
[121] "5471" "548644" "55276" "5557" "5558" "55703" "55811" "55821"
[129] "5631" "5634" "56655" "56953" "56985" "57804" "58497" "6240"
[137] "6241" "64425" "646625" "654364" "661" "7498" "8382" "84172"
```

```
[145] "84265" "84284" "84618" "8622" "8654" "87178" "8833" "9060"
[153] "9061" "93034" "953" "9533" "954" "955" "956" "957"
[161] "9583" "9615"
```

```
foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)
```

```
      1266      54855      1465      2034      2150      6659
-2.422719  3.201955 -2.313738 -1.888019  3.344508  2.392288
```

Let's run the gage pathway analysis

```
keggres = gage(foldchanges, gsets=kegg.sets.hs)
```

Lets look at the object returned from gage()

```
attributes(keggres)
```

```
$names
[1] "greater" "less" "stats"
```

Lets look at the first few down (less) pathway results:

```
head(keggres$less)
```

	p.geomean	stat.mean	p.val
hsa04110 Cell cycle	1.003993e-05	-4.353454	1.003993e-05
hsa03030 DNA replication	8.909558e-05	-3.968611	8.909558e-05
hsa03013 RNA transport	1.470985e-03	-3.007794	1.470985e-03
hsa04114 Oocyte meiosis	1.946905e-03	-2.921710	1.946905e-03
hsa03440 Homologous recombination	2.941989e-03	-2.868141	2.941989e-03
hsa00010 Glycolysis / Gluconeogenesis	6.059196e-03	-2.558327	6.059196e-03

	q.val	set.size	exp1
hsa04110 Cell cycle	0.001606390	120	1.003993e-05
hsa03030 DNA replication	0.007127646	36	8.909558e-05
hsa03013 RNA transport	0.077876201	143	1.470985e-03
hsa04114 Oocyte meiosis	0.077876201	99	1.946905e-03
hsa03440 Homologous recombination	0.094143663	28	2.941989e-03
hsa00010 Glycolysis / Gluconeogenesis	0.161578551	48	6.059196e-03

Now, let's try out the `pathview()` function from the `pathview` package to make a pathway plot with our RNA-Seq expression results shown in color

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13
```

```
Info: Writing image file hsa04110.pathview.png
```

A different PDF based output of the same data

```
pathview(gene.data=foldchanges, pathway.id="hsa04110", kegg.native=FALSE)
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Warning: reconcile groups sharing member nodes!
```

```
      [,1] [,2]  
[1,] "9"  "300"  
[2,] "9"  "306"
```

```
Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13
```

```
Info: Writing image file hsa04110.pathview.pdf
```

```
Warning in text.default(xloc, yloc, label = labs[sub2grp[sub.idx, 1]], cex = cex): length(la  
'labels' truncated to length 36
```

Let's process our results a bit more to automagically pull out the top 5 upregulated pathways, then further process that just to get the pathway IDs needed by the `pathview()` function

```
## Focus on top 5 upregulated pathways here for demo purposes only  
keggrespathways <- rownames(keggres$greater)[1:5]  
  
# Extract the 8 character long IDs part of each string  
keggresids = substr(keggrespathways, start=1, stop=8)  
keggresids
```

```
[1] "hsa04640" "hsa04630" "hsa04142" "hsa00140" "hsa04740"
```

Lets pass these IDs in keggresids to the pathview() function to draw plots for all the top 5 pathways

```
pathview(gene.data=foldchanges, pathway.id=keggresids, species="hsa")
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13
```

```
Info: Writing image file hsa04640.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13
```

```
Info: Writing image file hsa04630.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13
```

```
Info: Writing image file hsa04142.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13
```

```
Info: Writing image file hsa00140.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13
```

```
Info: Writing image file hsa04740.pathview.png
```

Q. Can you do the same procedure as above to plot the pathview figures for the top 5 down-regulated pathways?

```
keggrespathways_down <- rownames(keggres$less)[1:5]
keggresids_down = substr(keggrespathways_down, start=1, stop=8)
pathview(gene.data=foldchanges, pathway.id=keggresids_down, species="hsa")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13

Info: Writing image file hsa04110.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13

Info: Writing image file hsa03030.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13

Info: Writing image file hsa03013.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13

Info: Writing image file hsa04114.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/habeshir/Desktop/04:08/Lab13

Info: Writing image file hsa03440.pathview.png

Section 3. Gene Ontology (GO)

```

data(go.sets.hs)
data(go.subs.hs)
gobpsets = go.sets.hs[go.subs.hs$BP]
gobpres = gage(foldchanges, gsets=gobpsets)
lapply(gobpres, head)

```

\$greater

	p.geomean	stat.mean	p.val
G0:0007156 homophilic cell adhesion	4.892477e-05	3.971899	4.892477e-05
G0:0060429 epithelium development	6.727546e-05	3.834595	6.727546e-05
G0:0007610 behavior	1.735208e-04	3.594057	1.735208e-04
G0:0048729 tissue morphogenesis	2.470962e-04	3.498983	2.470962e-04
G0:0002009 morphogenesis of an epithelium	3.227439e-04	3.429317	3.227439e-04
G0:0016337 cell-cell adhesion	8.195506e-04	3.163057	8.195506e-04

	q.val	set.size	exp1
G0:0007156 homophilic cell adhesion	0.1337100	107	4.892477e-05
G0:0060429 epithelium development	0.1337100	478	6.727546e-05
G0:0007610 behavior	0.2299150	402	1.735208e-04
G0:0048729 tissue morphogenesis	0.2455518	403	2.470962e-04
G0:0002009 morphogenesis of an epithelium	0.2565814	326	3.227439e-04
G0:0016337 cell-cell adhesion	0.3656453	318	8.195506e-04

\$less

	p.geomean	stat.mean	p.val
G0:0000279 M phase	1.475361e-16	-8.323749	1.475361e-16
G0:0048285 organelle fission	7.498413e-16	-8.160305	7.498413e-16
G0:0000280 nuclear division	2.135098e-15	-8.034814	2.135098e-15
G0:0007067 mitosis	2.135098e-15	-8.034814	2.135098e-15
G0:0000087 M phase of mitotic cell cycle	5.927567e-15	-7.891758	5.927567e-15
G0:0007059 chromosome segregation	1.055918e-11	-6.988373	1.055918e-11

	q.val	set.size	exp1
G0:0000279 M phase	5.864560e-13	492	1.475361e-16
G0:0048285 organelle fission	1.490309e-12	373	7.498413e-16
G0:0000280 nuclear division	2.121754e-12	349	2.135098e-15
G0:0007067 mitosis	2.121754e-12	349	2.135098e-15
G0:0000087 M phase of mitotic cell cycle	4.712416e-12	359	5.927567e-15
G0:0007059 chromosome segregation	6.995458e-09	141	1.055918e-11

\$stats

	stat.mean	exp1
G0:0007156 homophilic cell adhesion	3.971899	3.971899
G0:0060429 epithelium development	3.834595	3.834595

G0:0007610	behavior	3.594057	3.594057
G0:0048729	tissue morphogenesis	3.498983	3.498983
G0:0002009	morphogenesis of an epithelium	3.429317	3.429317
G0:0016337	cell-cell adhesion	3.163057	3.163057

Section 4. Reactome Analysis

```
sig_genes <- res[res$padj <= 0.05 & !is.na(res$padj), "symbol"]
print(paste("Total number of significant genes:", length(sig_genes)))
```

```
[1] "Total number of significant genes: 8149"
```

```
write.table(sig_genes, file="significant_genes.txt", row.names=FALSE, col.names=FALSE, quote=
```

Q: What pathway has the most significant “Entities p-value”? Do the most significant pathways listed match your previous KEGG results? What factors could cause differences between the two methods?

The pathway that has the most significant entities p-value was cell cycle, m phase and mitosis, or DNA replication, or chromosome segregation. The most significant pathways listed match the previous KEGG results (when looking at the data, they appeared to be toward the top of the downregulated list). Some factors that could cause differences between the two methods includes data use data (the computer received all our info while the website used data it had), KEGG is more big and broad while reactome is smaller scaled data graphing.