HTML SESSION 02

HTML tags are the building blocks of an HTML document. They define the structure and content of a webpage. Tags are enclosed in angle brackets (< >) and usually come in pairs: an opening tag <tag> and a closing tag </tag>. Some tags, called self-closing tags, don't need a closing tag.

Common HTML tags and their uses:

Document Structure Tags

- **<!DOCTYPE html>**: Declares the document type as HTML5. It tells the browser to use HTML5 standards to render the page.
- **<html>**: The root element that contains all HTML elements of the page. All HTML code must be inside the <html> tag.
- **<head>**: Contains metadata about the document, such as the title, character encoding, external file links (CSS, JS), etc. It does not contain visible content.
- **<body>**: Contains all the visible content on the webpage, such as text, images, links, and other media. This is where the main content goes.

2. Text Formatting Tags

- **<h1> to <h6>:** Define headings of different levels. <h1> is the largest and most important, while <h6> is the smallest.

  Example: <h1>This is a Heading</h1>

index.html

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Session 2</title>
</head>
<body>
    <h1>Hello Student</h1>
    <h2>Hello Student</h2>
    <h3>Hello Student</h3>
    <h4>Hello Student</h4>
    <h5>Hello Student</h5>
    <h6>Hello Student</h6>
</body>
</html>
```

Hello Student

Hello Student

Hello Student

Hello Student

Hello Student

Hello Student

https://www.linkedin.com/in/afsah09/
afsahfarooqui119@gmail.com

HTML SESSION 02

- ** :** Defines a paragraph.

  Example: This is a paragraph of text.

```
<body>
    <p>This is a paragraph of text.</p>
</body>
```

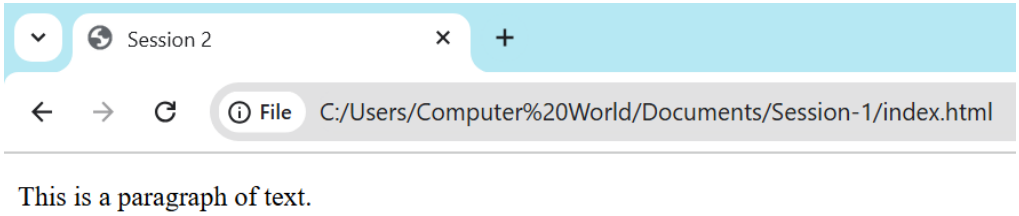

- **:** Makes text bold and indicates that the content has strong importance.

  Example: This text is bold and important.

```
<body>
  <p>
    This is Afsah Farooqui! <strong>Web and Mobile App Developer.</strong>Feel
    free to explore my work and connect for exciting collaboration
    opportunities!
  </p>
</body>
```

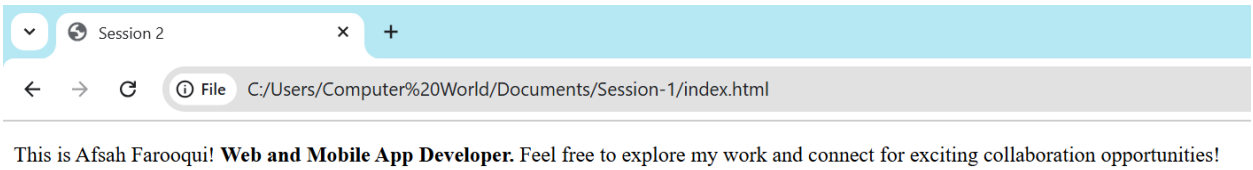

https://www.linkedin.com/in/afsah09/
afsahfarooqui119@gmail.com

HTML SESSION 02

- **:** Makes text italic and indicates emphasis.

  Example: This text is emphasized.

```
<body>
  <p>
    This is Afsah Farooqui! <em>Web and Mobile App Developer.</em> Feel
    free to explore my work and connect for exciting collaboration
    opportunities!
  </p>
</body>
```

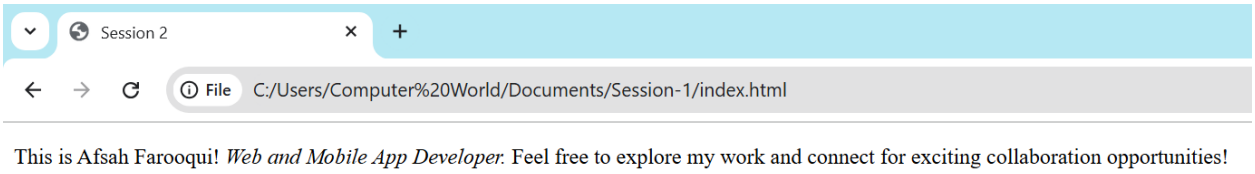

This is Afsah Farooqui! *Web and Mobile App Developer.* Feel free to explore my work and connect for exciting collaboration opportunities!

- **
:** A self-closing tag that inserts a line break (new line).

  Example: Line 1
Line 2

```
<body>
  <p>
    This is Afsah Farooqui! Web and Mobile App Developer. <br> Feel
    free to explore my work and connect for exciting collaboration
    opportunities!
  </p>
</body>
```

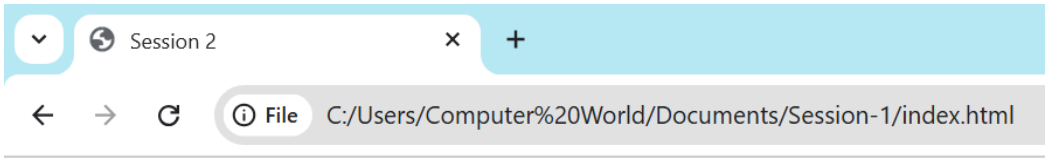

This is Afsah Farooqui! Web and Mobile App Developer.
Feel free to explore my work and connect for exciting collaboration opportunities!

https://www.linkedin.com/in/afsah09/
afsahfarooqui119@gmail.com

HTML SESSION 02

- **<blockquote>:** Used to define a block of text that is a quotation.

  Example: <blockquote>This is a quote.</blockquote>

```
<body>
  <blockquote>
    "Success is not the key to happiness. Happiness is the key to success."
    Albert Schweitzer
  </blockquote>
```

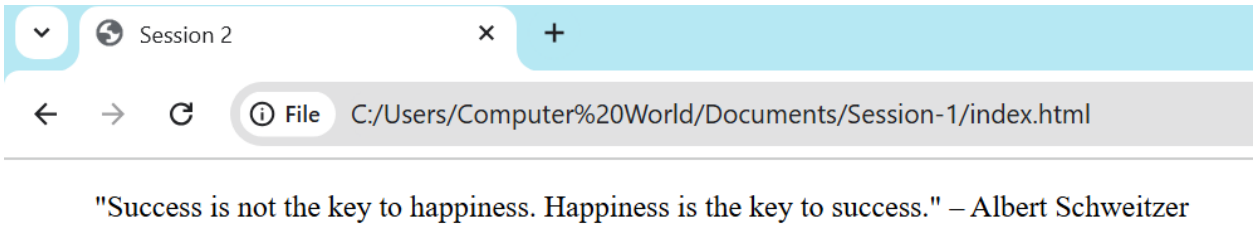

https://www.linkedin.com/in/afsah09/
afsahfarooqui119@gmail.com

HTML SESSION 02

List Tag

- **<ul>**: Defines an unordered list (bulleted list).
- **<ol>**: Defines an ordered list (numbered list).
- **<li>**: Represents an item in a list (can be used inside <ul> or <ol>).

Example: <li>Item 1</li>

```
<body>
<ul>
  <li>Oil</li>
  <li>Egg</li>
  <li>Black pepper</li>
  <li>Salt</li>
</ul>
</body>
```

Unordered list:

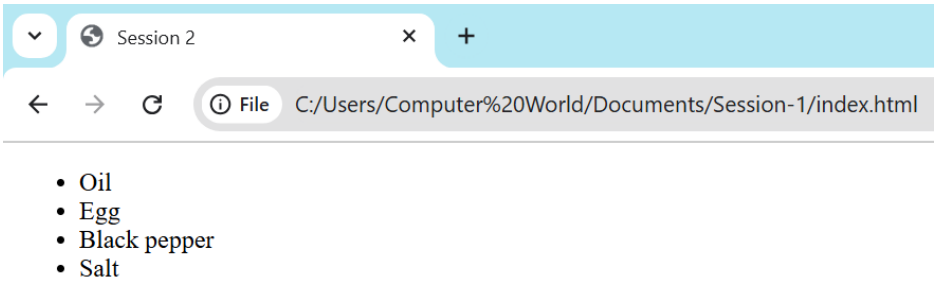

Ordered list:

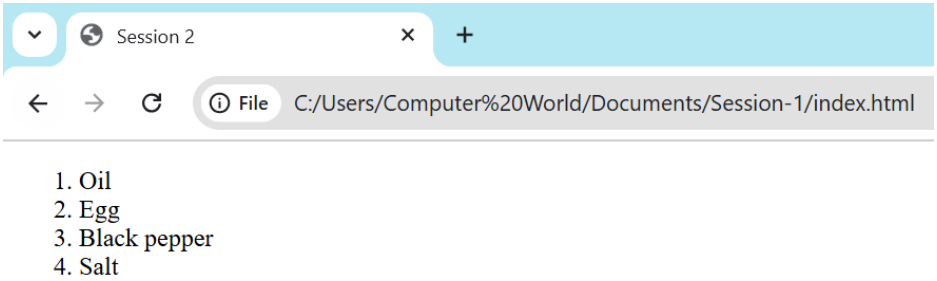

https://www.linkedin.com/in/afsah09/
afsahfarooqui119@gmail.com

HTML SESSION 02

Links and Media Tags

❖ **<a>:** Defines a hyperlink.

Attributes:

- **href:** Specifies the URL of the link.
- **target:** Specifies where to open the link (_blank for a new tab)

Example: <a href="https://example.com" target="_blank">Visit Example</a>

❖ **<img>**: Embeds an image.

Attributes:

- src: Specifies the path to the image file.
- alt: Provides alternative text for accessibility.
- width and height: Define the image dimensions.

Example: <img src="image.jpg" alt="Description of image" width="300">

❖ **<video>**: Embeds a video.
Attributes:

- controls: Adds playback controls.
- autoplay: Plays the video automatically.
- loop: Loops the video playback.

Example: <video src="video.mp4" controls width="600"></video>

❖ **<audio>**: Embeds audio content.

Example: <audio src="audio.mp3" controls></audio>

https://www.linkedin.com/in/afsah09/
afsahfarooqui119@gmail.com

HTML SESSION 02

Table Tags

- **<table>**: A **<table>** is an HTML element used to create a structured grid layout for displaying data in rows and columns. It consists of several child elements to define the structure of the table.

Key Elements:

1. **<table>:** The container for the entire table.
2. **<tr>**: Defines a table row.
3. **<td>**: Defines a data cell within a row.
4. **<th>**: Defines a header cell, usually bold and centered by default.
5. **<caption>**: Adds a title or caption for the table (optional).

Example:

```html
<body>
    <table>
        <tr>
          <th>Month</th>
          <th>Sales</th>
          <th>Profit</th>
        </tr>
        <tr>
          <td>January</td>
          <td>$10,000</td>
          <td>$2,000</td>
        </tr>
        <tr>
          <td>February</td>
          <td>$12,000</td>
          <td>$2,500</td>
        </tr>
      </table>
</body>
```

Month	Sales	Profit
January	$10,000	$2,000
February	$12,000	$2,500

https://www.linkedin.com/in/afsah09/
afsahfarooqui119@gmail.com

HTML SESSION 02

Forms and Input Tags

<form>: Defines a form for user input.

Attributes:

- action: Specifies where the form data will be sent.
- method: Specifies the HTTP method (GET or POST).

<input>: Defines an input field.

Common types:

- text: Single-line text input.
- password: Hides entered text.
- email: Validates email input.
- submit: Creates a submit button.

<textarea>: Creates a multi-line text input field.

Example: <textarea> This is a sample text area where users can input multiple lines of text.

</textarea>

<Button>: A `<button>` is an HTML element used to create interactive clickable buttons on a webpage. It can be used to perform various actions, such as submitting forms, triggering JavaScript functions, or navigating to different parts of a site.

Example: <button>Click Me</button>

```html
<body>
    <form action="/submit" method="post">
        <label for="name">Name:</label>
        <input type="text" id="name" name="name" placeholder="Enter your name">
        <button type="submit">Submit</button>
    </form>
</body>
```

Name: Enter your name Submit

https://www.linkedin.com/in/afsah09/
afsahfarooqui119@gmail.com