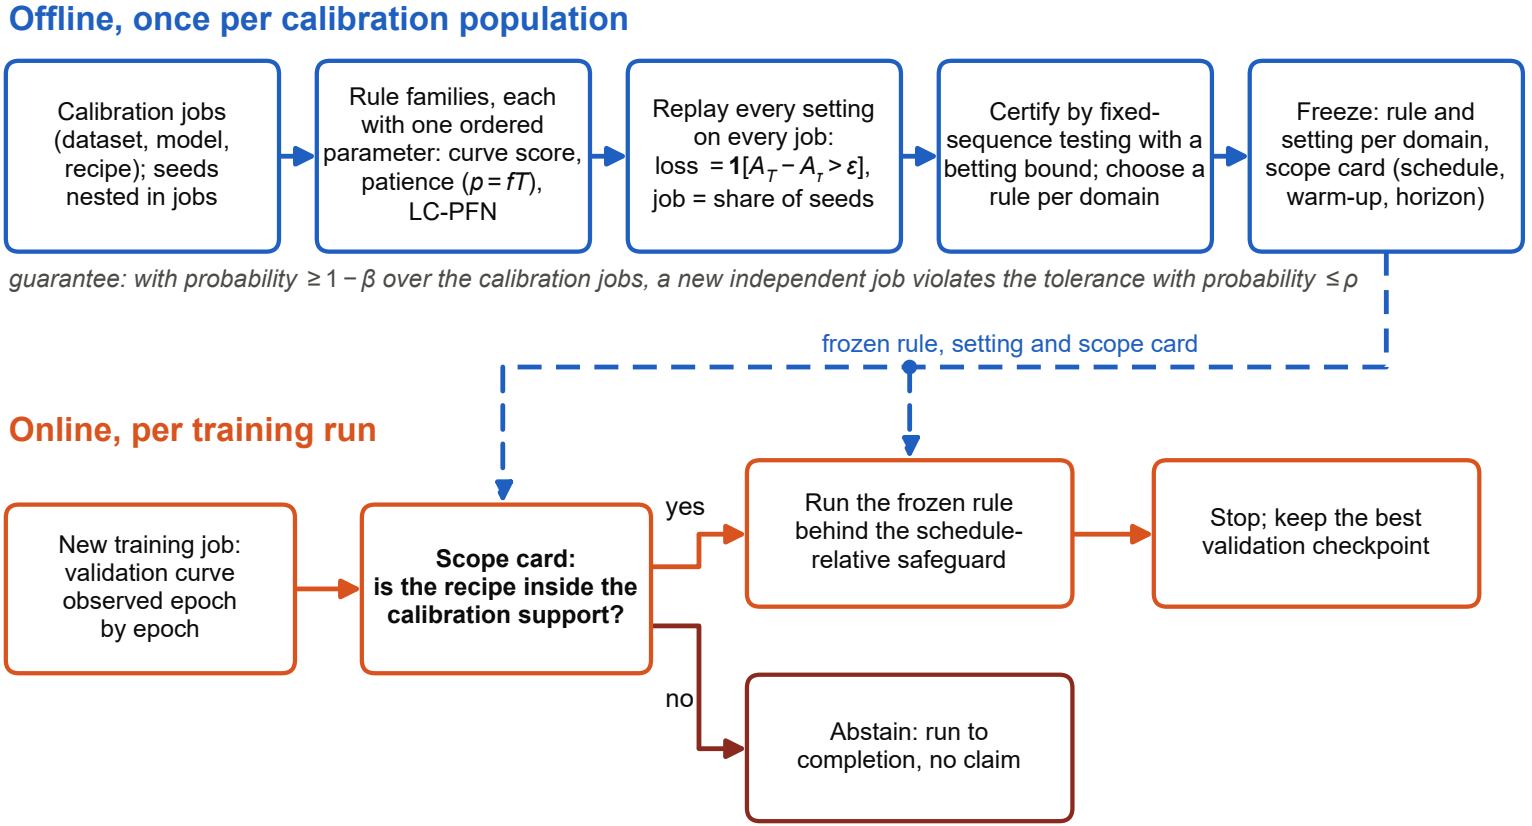

Offline, once per calibration population
Calibration jobs (dataset, model, recipe); seeds nested in jobs
Rule families, each with one ordered parameter: curve score, patience ($p = fT$), LC-PFN
Replay every setting on every job: loss $= \mathbf{1}[A_T - A_\tau > \varepsilon]$, job = share of seeds
Certify by fixed-sequence testing with a betting bound; choose a rule per domain
Freeze: rule and setting per domain, scope card (schedule, warm-up, horizon)
guarantee: with probability $\geq 1 - \beta$ over the calibration jobs, a new independent job violates the tolerance with probability $\leq \rho$
frozen rule, setting and scope card
Online, per training run
New training job: validation curve observed epoch by epoch
Scope card: is the recipe inside the calibration support?
yes
Run the frozen rule behind the schedule-relative safeguard
Stop; keep the best validation checkpoint
no
Abstain: run to completion, no claim