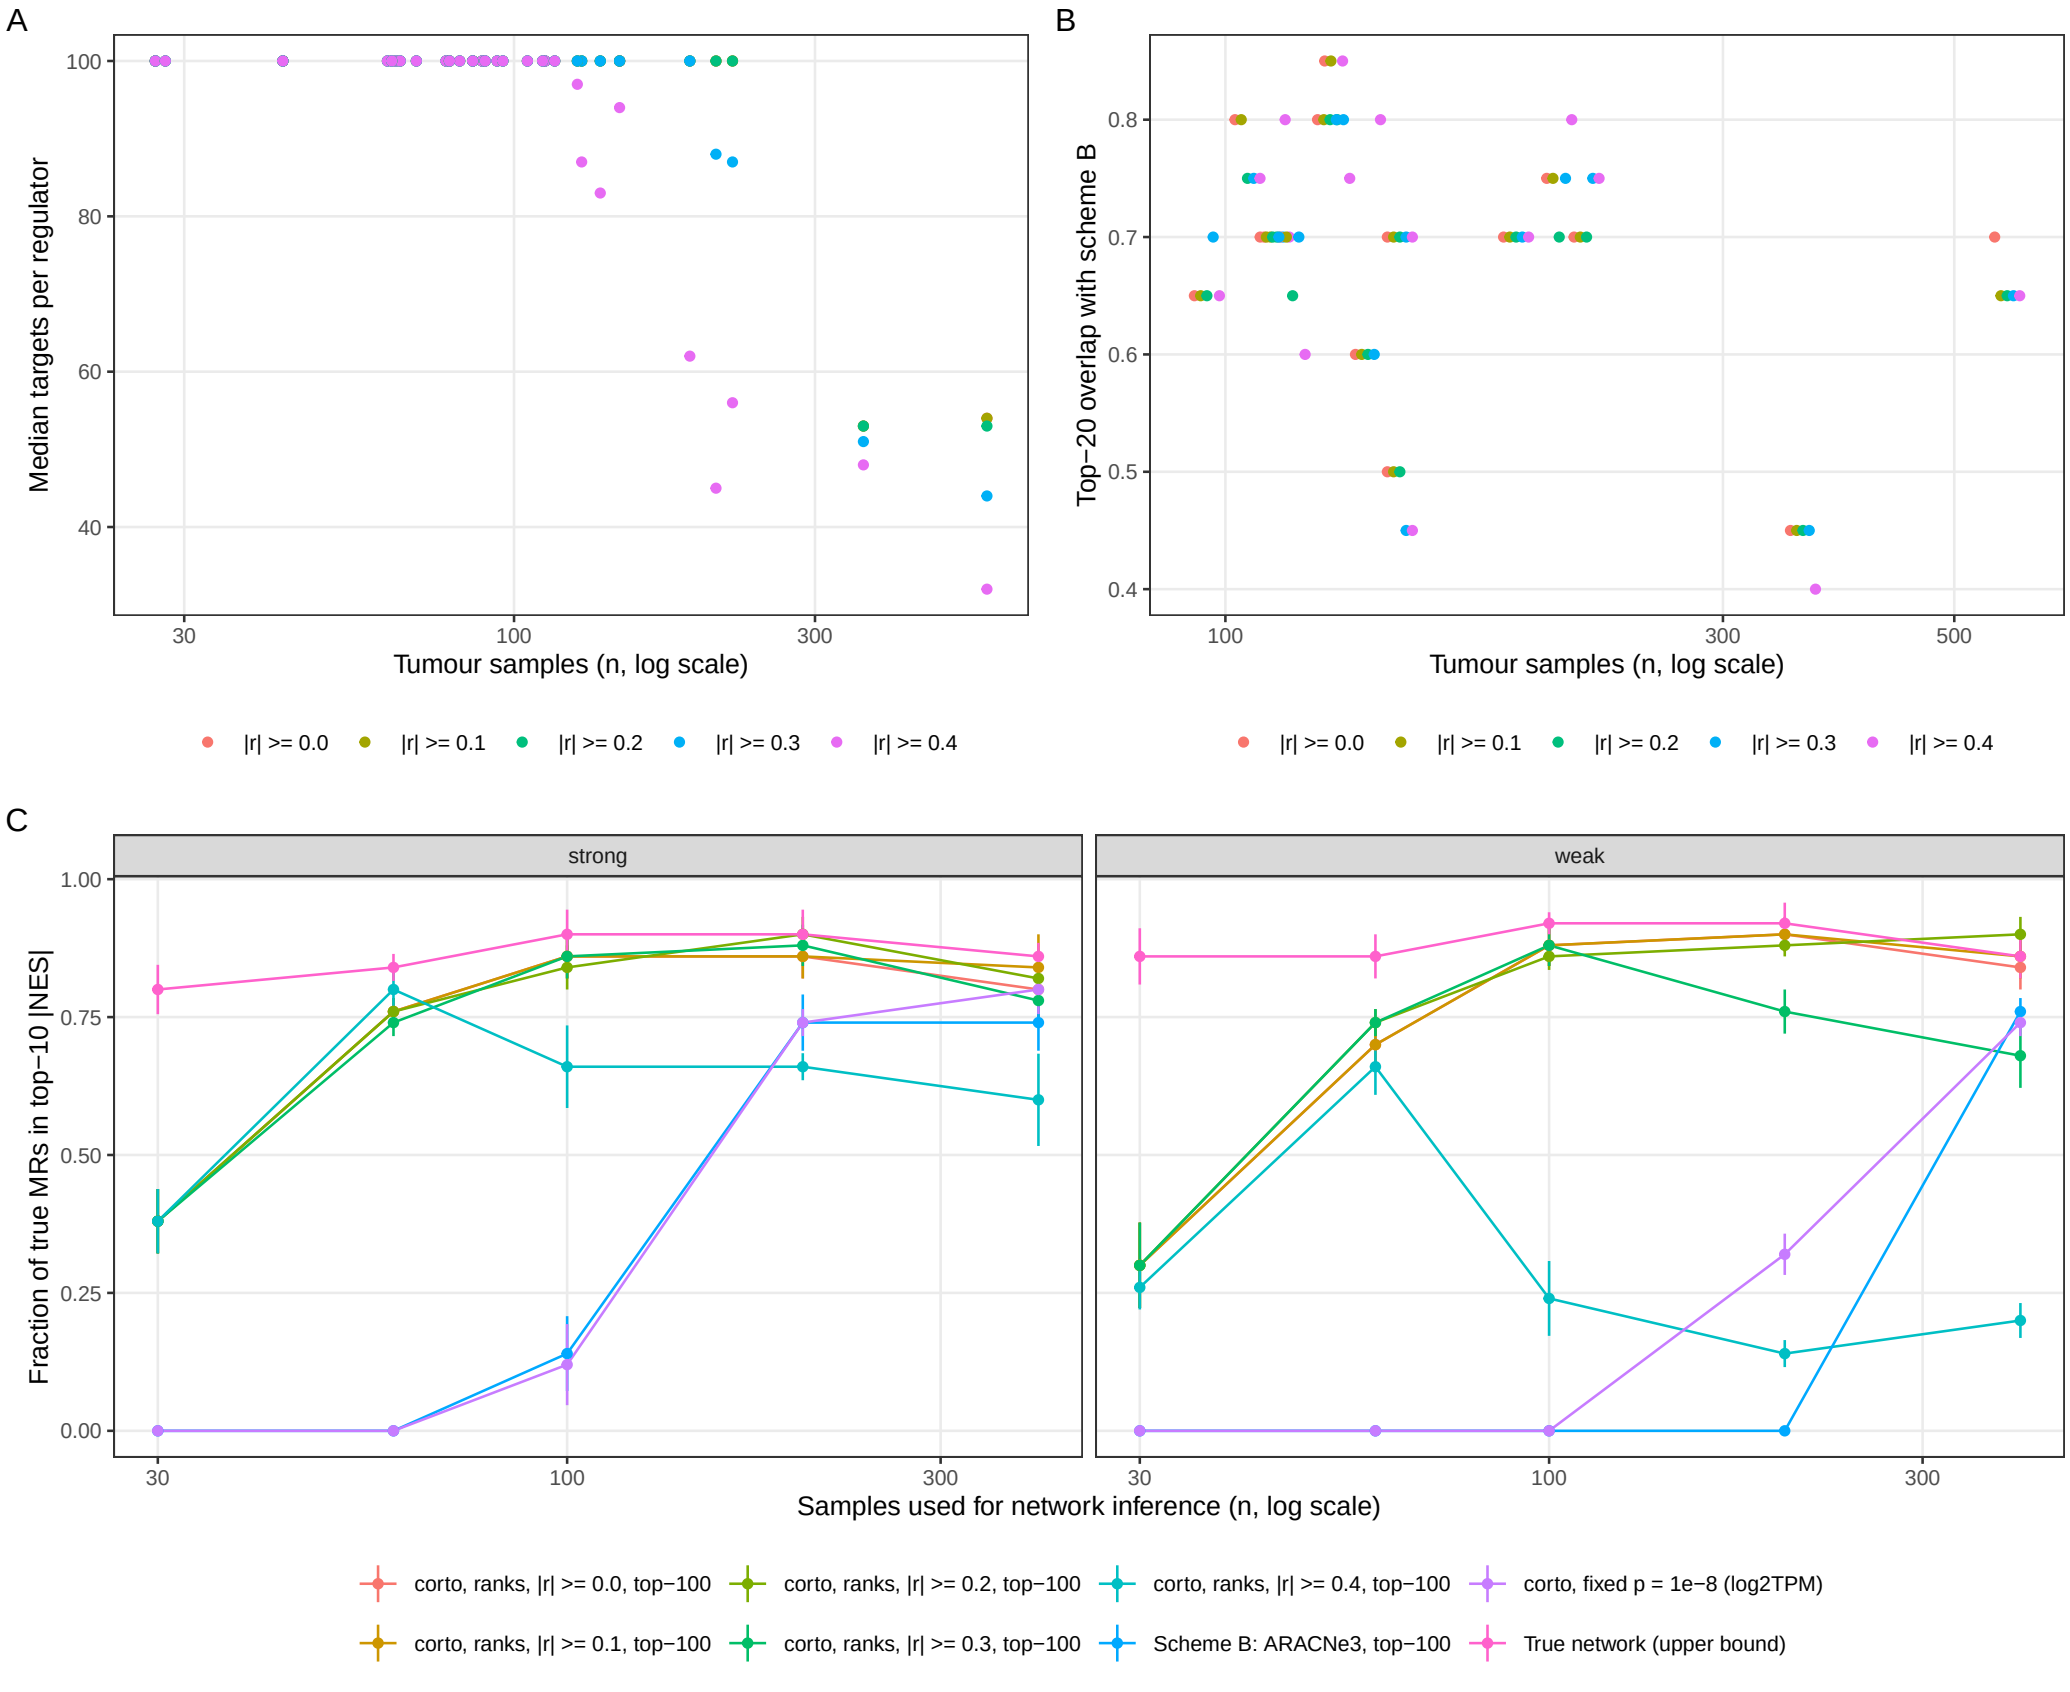
A
Median targets per regulator
Tumour samples (n, log scale)
B
Top−20 overlap with scheme B
Tumour samples (n, log scale)
|r| >= 0.0
|r| >= 0.1
|r| >= 0.2
|r| >= 0.3
|r| >= 0.4
C
strong
weak
Fraction of true MRs in top−10 |NES|
Samples used for network inference (n, log scale)
corto, ranks, |r| >= 0.0, top−100
corto, ranks, |r| >= 0.1, top−100
corto, ranks, |r| >= 0.2, top−100
corto, ranks, |r| >= 0.3, top−100
corto, ranks, |r| >= 0.4, top−100
Scheme B: ARACNe3, top−100
corto, fixed p = 1e−8 (log2TPM)
True network (upper bound)