



Orchestrierung

Das Big Picture: Wir sind nun auf Applikationsebene.

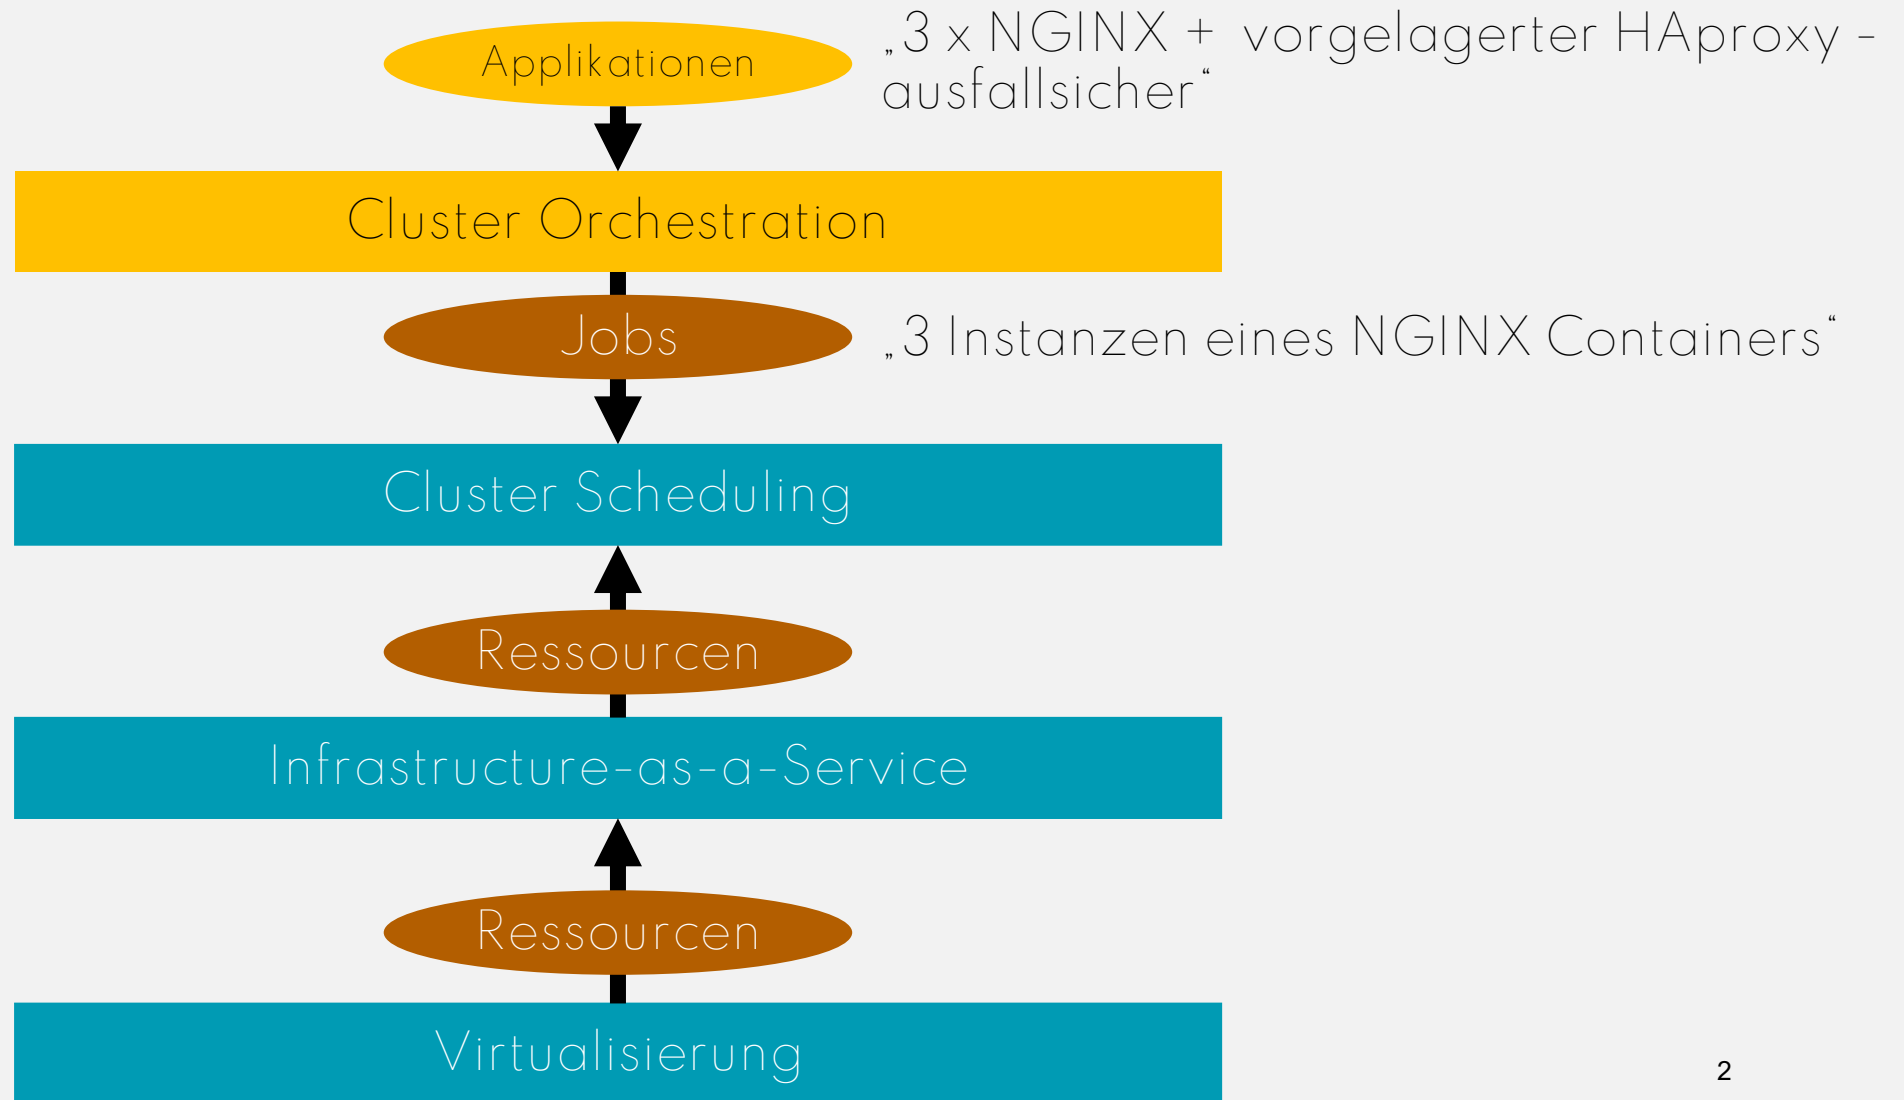


Ein Cluster-Orchestrierer bietet eine Schnittstelle zwischen Betrieb und Entwicklung für ein Cluster an.

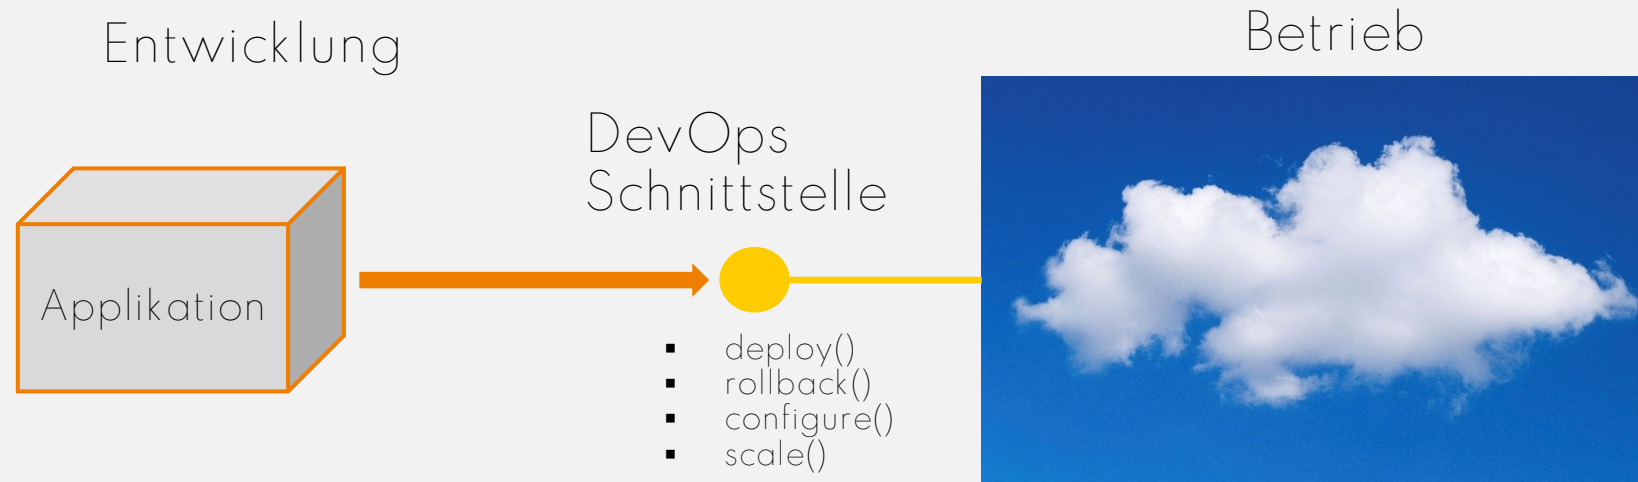


Ein Cluster-Orchestrierer automatisiert vielerlei Betriebsaufgaben für Anwendung auf einem Cluster.

- Scheduling von Containern mit applikationsspezifischen Constraints (z.B. Deployment- und Start-Reihenfolgen, Gruppierung, ...)
- Aufbau von notwendigen Netzwerk-Verbindungen zwischen Containern.
- Bereitstellung von persistenten Speichern für zustandsbehaftete Container.
- (Auto-)Skalierung von Containern.
- Re-Scheduling von Containern im Fehlerfall (Auto-Healing) oder zur Performance-Optimierung.
- Container-Logistik: Verwaltung und Bereitstellung von Containern.
- Package-Management: Verwaltung und Bereitstellung von Applikationen.
- Bereitstellung von Administrationsschnittstellen (Remote-API, Kommandozeile).
- Management von Services: Service Discovery, Naming, Load Balancing.
- Automatismen für Rollout-Workflows wie z.B. Canary Rollout.
- Monitoring und Diagnose von Containern und Services.

Blaupause einer Anwendung (vereinfacht)

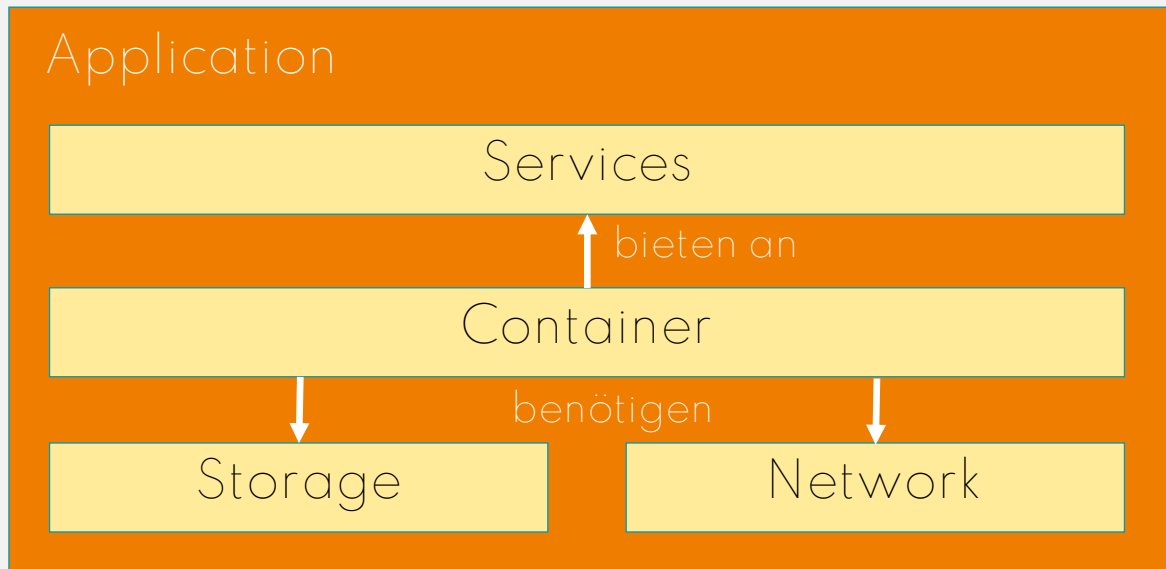


Metamodell

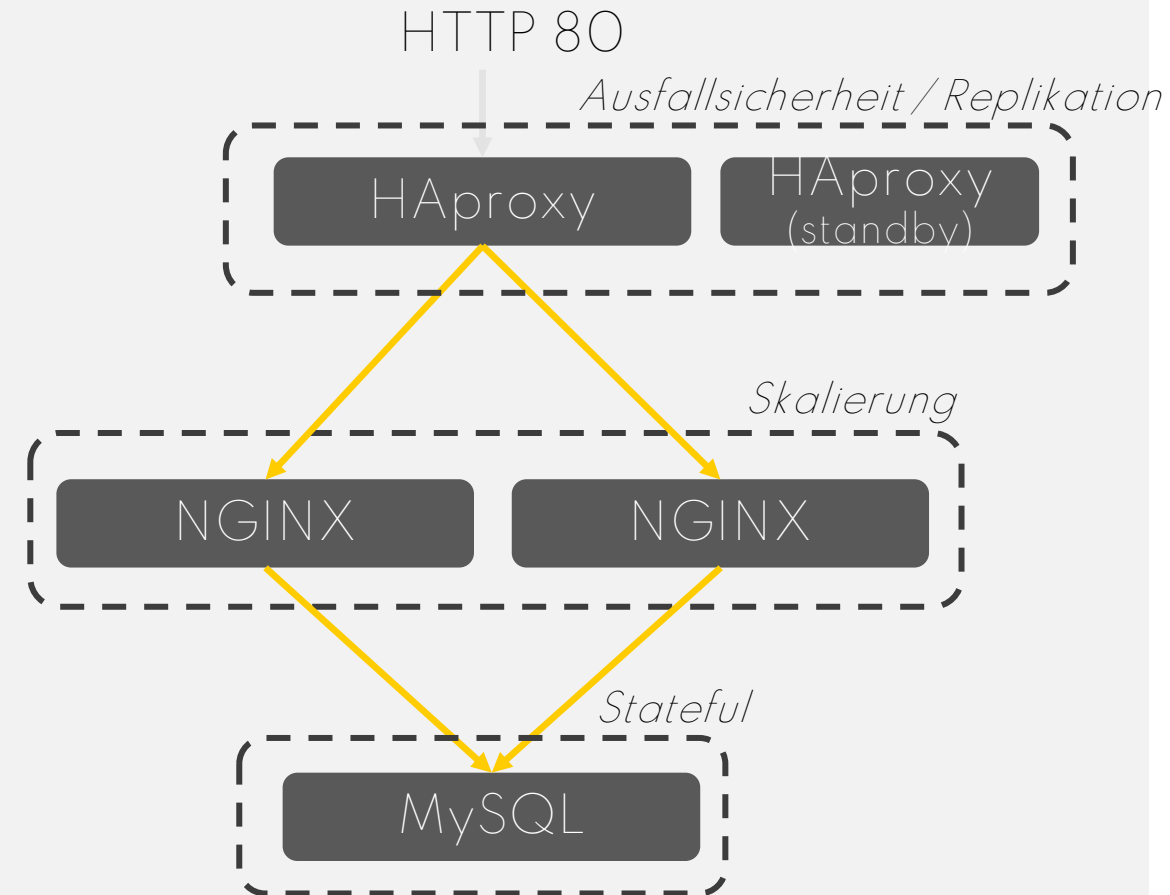


Modell

1-Level- vs. 2-Level-Orchestrierung

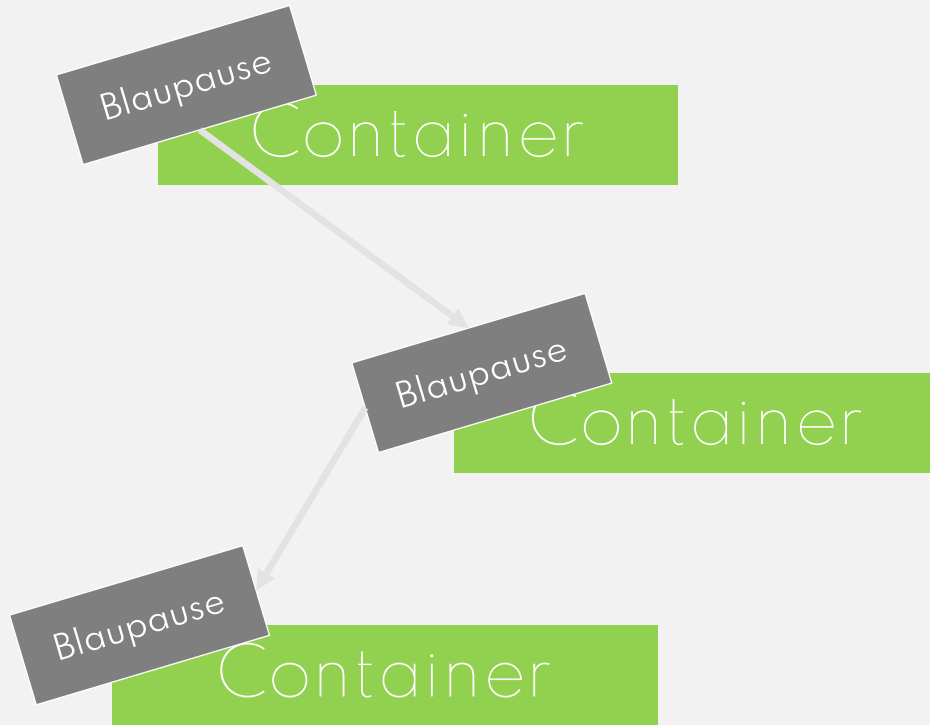

1-Level-Orchestrierung
(Container-Graph)

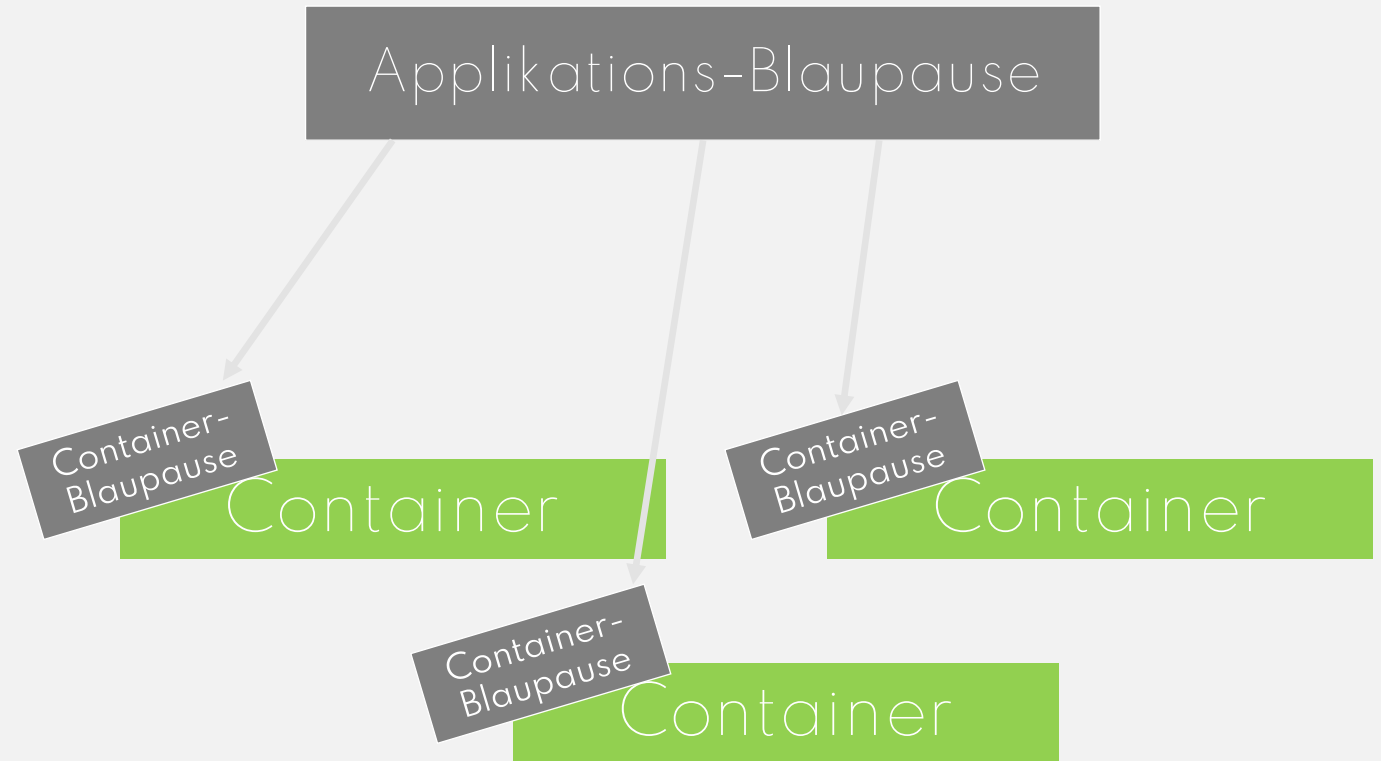

2-Level-Orchestrierung
(Container-Repository mit zentraler
Bauanleitung)

1-Level- vs. 2-Level-Orchestrierung

Plain Docker

```
FROM ubuntu
ENTRYPOINT nginx
EXPOSE 80
```

```
docker run -d --link
nginx:nginx
```

1-Level-Orchestrierung
(Container-Graph)

<https://docs.docker.com/compose/compose-file>

Docker Compose

weba:

```
image: qaware/nginx
expose:
  - 80
```

webb:

```
image: qaware/nginx
expose:
  - 80
```

haproxy:

```
image: qaware/haproxy
links:
  - weba
  - webb
ports:
  - „80:80“
expose:
  - 80
```

FROM ubuntu
ENTRYPOINT nginx
EXPOSE 80

FROM ubuntu
ENTRYPOINT haproxy
EXPOSE 80

2-Level-Orchestrierung
(Container-Repository mit zentraler
Bauanleitung)

Cluster-Orchestrierer

- Kubernetes [/ OpenShift]
- Apache Marathon & Chronos
- Docker Compose & Swarm

Kubernetes



kubernetes by Google

Manage a cluster of Linux containers as a single system to accelerate Dev and simplify Ops.

Josef Adersberger @adersberger · Jul 21

Google spares no effort to launch
#kubernetes @ #OSCON

2015



Kubernetes

- Cluster-Orchestrierer auf Basis von Docker-Containern, der eine Reihe an Kern-Abstraktionen für den Betrieb von Anwendungen in einem großen Cluster einführt. Die Blaupause wird über YAML-Dateien definiert.
- Open-Source-Projekt, das von Google initiiert wurde. Google will damit die jahrelange Erfahrung im Betrieb großer Cluster der Öffentlichkeit zugänglich machen und damit auch Synergien mit dem eigenen Cloud-Geschäft heben.
- Seit Juli 2015 in der Version 1.0 verfügbar und damit produktionsreif. Skaliert aktuell nachweislich auf 1000 Nodes großen Clustern.
- Bei vielen Firmen im Einsatz wie z.B. Google im Rahmen der Google Container Engine, Wikipedia, ebay. Beiträge an der Codebasis aus vielen Firmen neben Google – u.A. Mesosphere, Microsoft, Pivotal, RedHat.
- Setzt den Standard im Bereich Cluster-Orchestrierung. Dafür wurde auch eigens die Cloud Native Computing Foundation gegründet (<https://cncf.io>).

Kubernetes: The Documentary [PART 1]



13:41 / 24:54

Für Details scrollen



Kubernetes: The Documentary [PART 2]



And now Kubernetes seems to be the de facto standard across all cloud providers globally.




28:26 / 31:17

Für Details scrollen



Architektur von Kubernetes

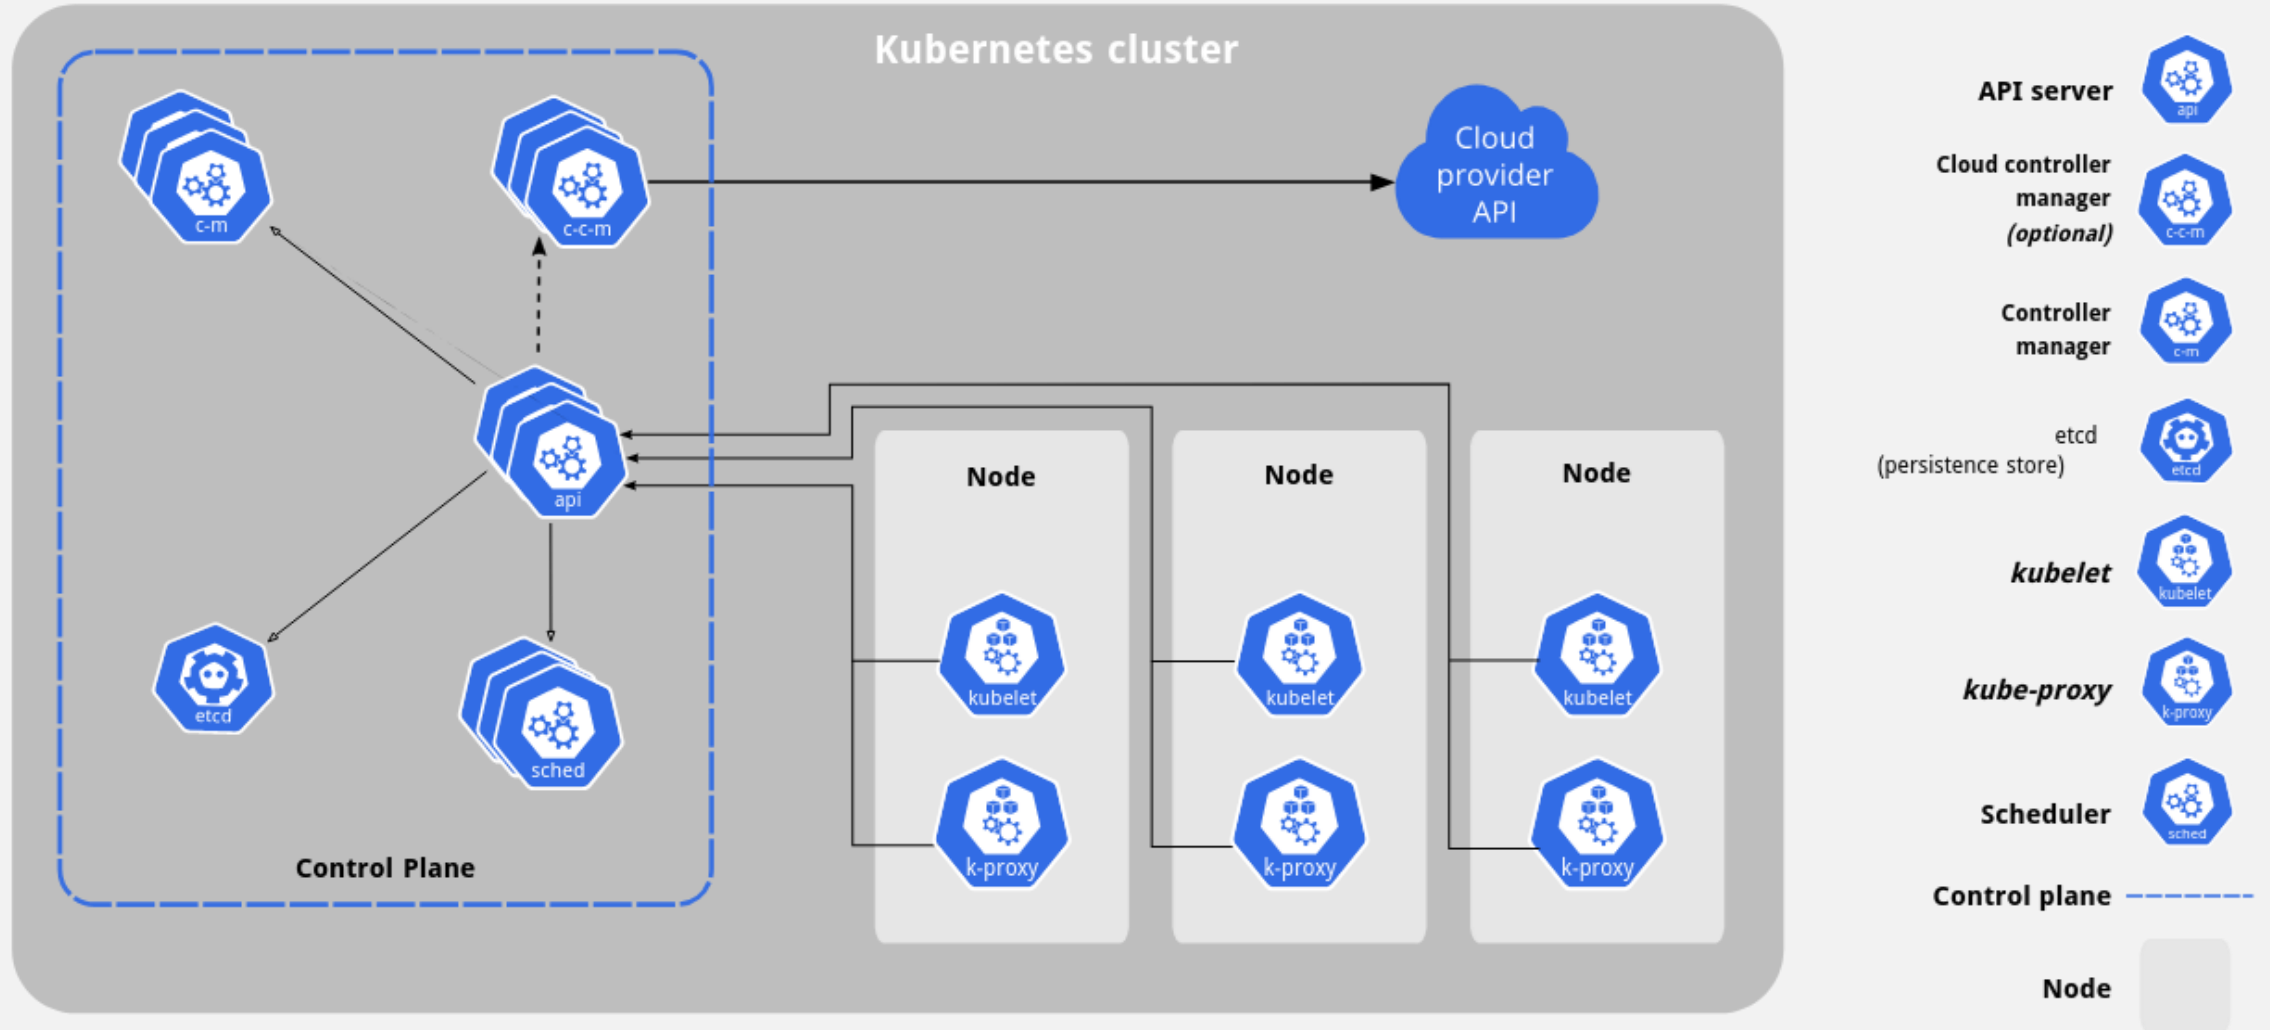





QA|WARE

Orchestrierungsmuster


Orchestrierungsmuster – Separation of Concerns mit modularen Containern

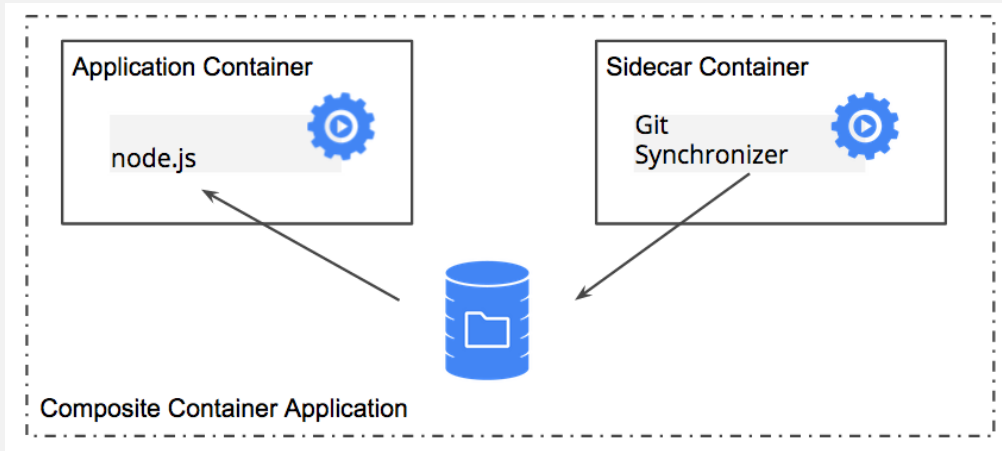

Sidecar Container

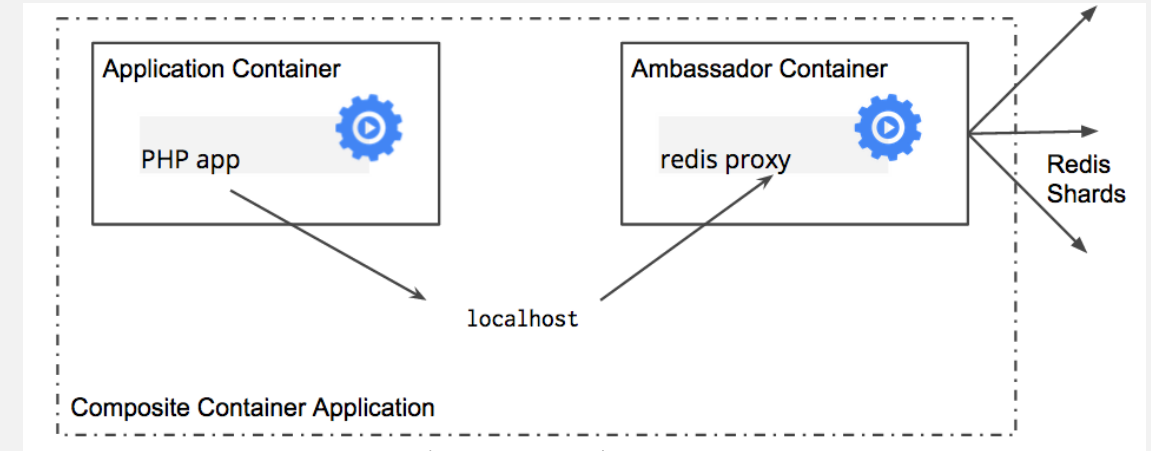


Ambassador Container

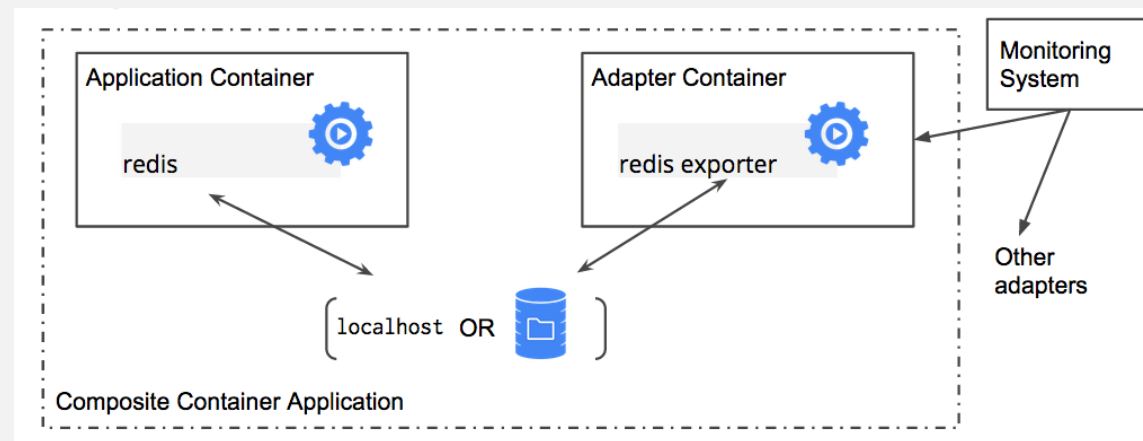

Adapter Container


Sidecar Containers

Sidecar containers extend and enhance the “main” container, they take existing containers and make them better. As an example, consider a container that runs the Nginx web server. Add a different container that syncs the file system with a git repository, share the file system between the containers and you have built Git push-to-deploy. But you’ve done it in a modular manner where the git synchronizer can be built by a different team, and can be reused across many different web servers (Apache, Python, Tomcat, etc). Because of this modularity, you only have to write and test your git synchronizer once and reuse it across numerous apps. And if someone else writes it, you don’t even need to do that.

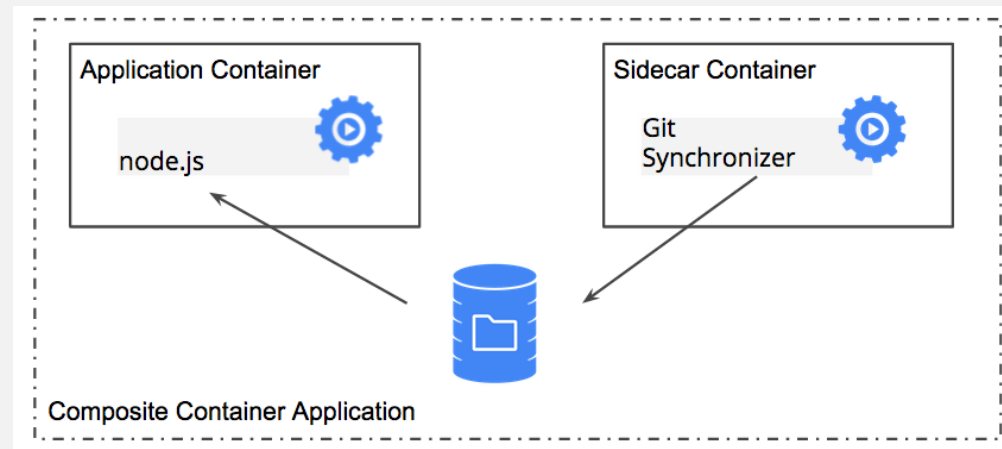

Ambassador containers

Ambassador containers proxy a local connection to the world. As an example, consider a Redis cluster with read-replicas and a single write master. You can create a Pod that groups your main application with a Redis ambassador container. The ambassador is a proxy responsible for splitting reads and writes and sending them on to the appropriate servers. Because these two containers share a network namespace, they share an IP address and your application can open a connection on “localhost” and find the proxy without any service discovery. As far as your main application is concerned, it is simply connecting to a Redis server on localhost. This is powerful, not just because of separation of concerns and the fact that different teams can easily own the components, but also because in the development environment, you can simply skip the proxy and connect directly to a Redis server that is running on localhost.

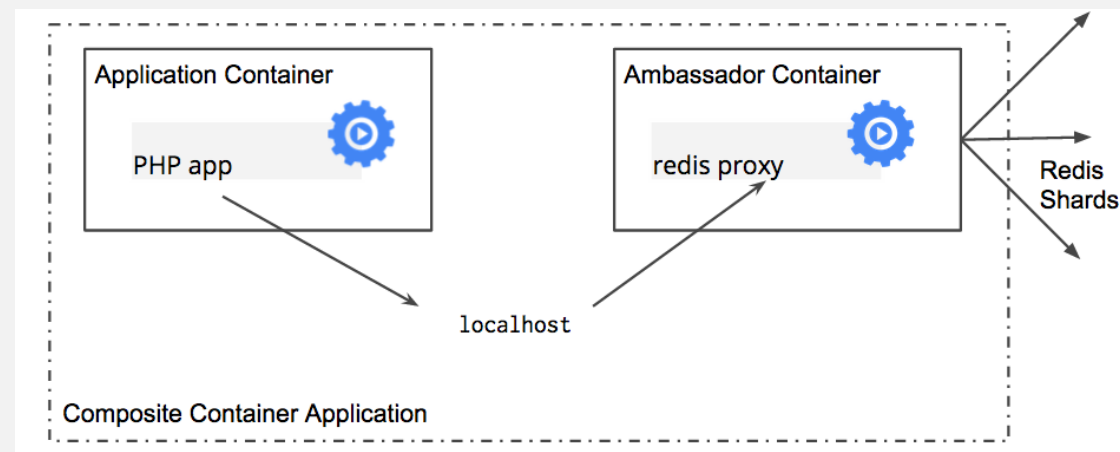

Adapter containers

Adapter containers standardize and normalize output. Consider the task of monitoring N different applications. Each application may be built with a different way of exporting monitoring data. (e.g. JMX, StatsD, application specific statistics) but every monitoring system expects a consistent and uniform data model for the monitoring data it collects. By using the adapter pattern of composite containers, you can transform the heterogeneous monitoring data from different systems into a single unified representation by creating Pods that groups the application containers with adapters that know how to do the transformation. Again because these Pods share namespaces and file systems, the coordination of these two containers is simple and straightforward.

