



OPERATING SYSTEMS

UE24CS242B

Operating-System Services, Design and Implementation

Pavan A C

Department of Computer Science & Engineering

OPERATING SYSTEMS

Slides Credits for all the PPTs of this course

- The slides/diagrams in this course are an **adaptation**, **combination**, and **enhancement** of material from the following resources and persons:
 1. Slides of Operating System Concepts, Abraham Silberschatz, Peter Baer Galvin, Greg Gagne - 9th edition 2013 and some slides from 10th edition 2018
 2. Some conceptual text and diagram from Operating Systems - Internals and Design Principles, William Stallings, 9th edition 2018
 3. Some presentation transcripts from A. Frank – P. Weisberg
 4. Some conceptual text from Operating Systems: Three Easy Pieces, Remzi Arpaci-Dusseau, Andrea Arpaci Dusseau



OPERATING SYSTEMS




Operating-System Services

Pavan A C

Department of Computer Science

OPERATING SYSTEMS

A View of Operating System Services

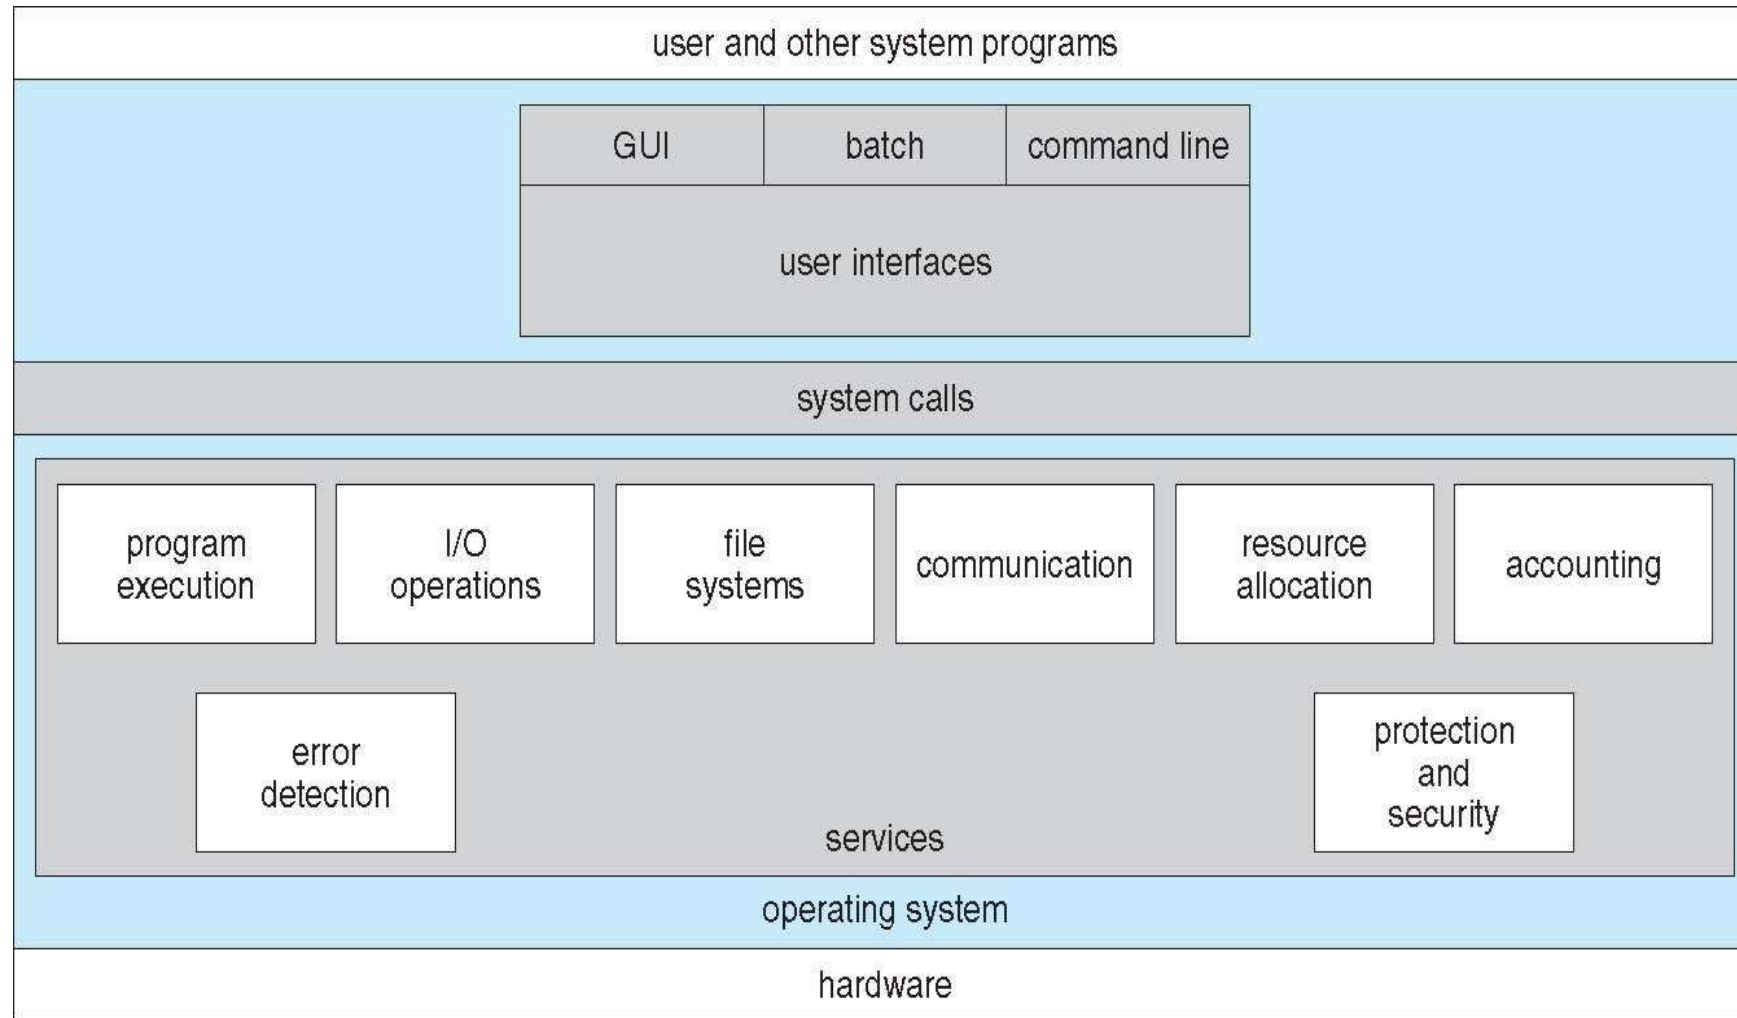

- Operating systems provide an environment for execution of programs and services to programs and users
- Set of operating-system services provides functions that are helpful to the user:
 - **User interface** - Almost all operating systems have a user interface (**UI**).
 - **Command-Line (CLI)** - Command interpreters (shells)
 - **Graphics User Interface (GUI)**
 - **Batch**
 - **Program execution** - The system must be able to load a program into memory and to run that program, end execution, either normally or abnormally (indicating error)
 - **I/O operations** - A running program may require I/O, which may involve a file or an I/O device

- **File-system manipulation** - The file system is of particular interest. Programs need to read and write files and directories, create and delete them, search them, list file Information, permission management.
- **Communications** – Processes may exchange information, on the same computer or between computers over a network
 - Communications may be via shared memory or through message passing (packets moved by the OS)


- **Error detection** – OS needs to be constantly aware of possible errors
 - May occur in the CPU and memory hardware, in I/O devices, in user program
 - For each type of error, OS should take the appropriate action to ensure correct and consistent computing
 - Debugging facilities can greatly enhance the user's and programmer's abilities to efficiently use the system

- Another set of OS functions exists for ensuring the efficient operation of the system itself via resource sharing
 - **Resource allocation** - When multiple users or multiple jobs running concurrently, resources must be allocated to each of them
 - Many types of resources - CPU cycles, main memory, file storage, I/O devices.
 - **Accounting** - To keep track of which users use how much and what kinds of computer resources

- **Protection and security** - The owners of information stored in a multiuser or networked computer system may want to control use of that information, concurrent processes should not interfere with each other
 - **Protection** involves ensuring that all access to system resources is controlled
 - **Security** of the system from outsiders requires user authentication, extends to defending external I/O devices from invalid access attempts



- **System calls** provide an interface to the services made available by an operating system.
- These calls are generally available as routines written in a higher level programming language or assembly language
- Example: Sequence of system calls used for copying contents from one file to another

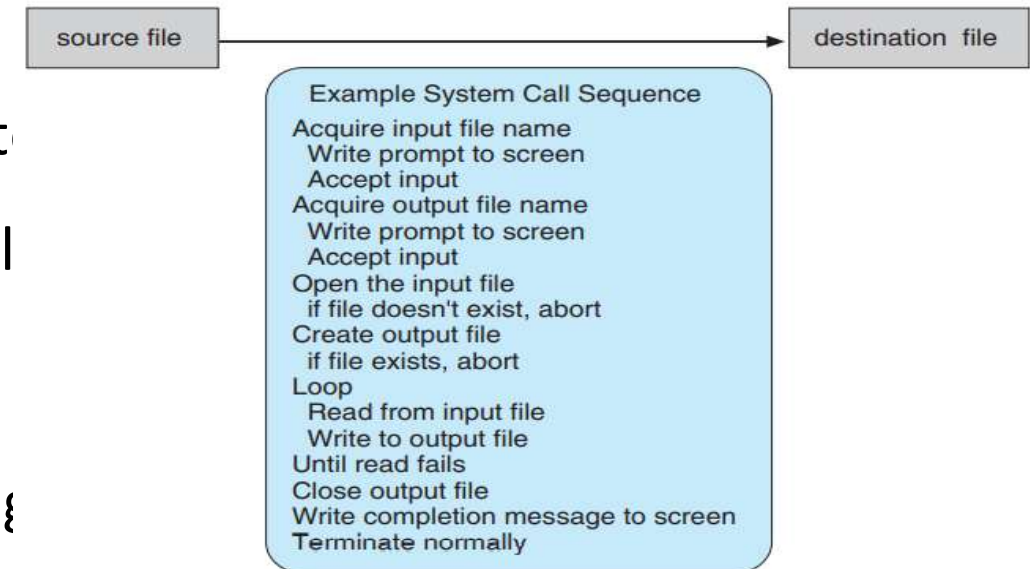

OPERATING SYSTEMS

Types of System calls

System calls can be grouped roughly into six major categories:


1. Process control
2. File manipulation
3. Device manipulation
4. Information maintenance
5. Communications
6. Protection

	Windows	Unix
Process Control	CreateProcess() ExitProcess() WaitForSingleObject()	fork() exit() wait()
File Manipulation	CreateFile() ReadFile() WriteFile() CloseHandle()	open() read() write() close()
Device Manipulation	SetConsoleMode() ReadConsole() WriteConsole()	ioctl() read() write()
Information Maintenance	GetCurrentProcessID() SetTimer() Sleep()	getpid() alarm() sleep()
Communication	CreatePipe() CreateFileMapping() MapViewOfFile()	pipe() shm_open() mmap()
Protection	SetFileSecurity() InitializeSecurityDescriptor() SetSecurityDescriptorGroup()	chmod() umask() chown()

OPERATING SYSTEMS

Example of a system call

- A C program invokes the printf() statement
- The C library intercepts this call and invokes the necessary system call **write()** in the operating system
- The C library takes the value returned by write() and passes it back to the user program

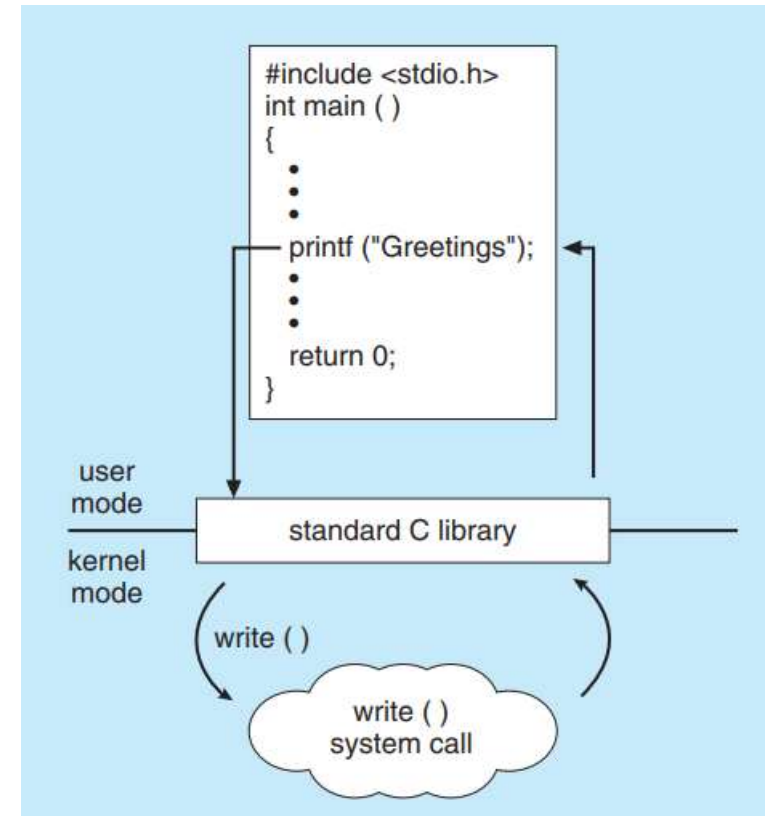

PES
UNIVERSITY
CELEBRATING 50 YEARS

Design goals

- Start the design by defining goals and specifications
- Affected by choice of hardware and the type of system
- Requirements can be categorized as **User** goals and **System** goals
 - User goals – operating system should be convenient to use, easy to learn, reliable, safe, and fast
 - System goals – operating system should be easy to design, implement, and maintain, as well as flexible, reliable, error-free, and efficient

OPERATING SYSTEMS

Operating-System Design and Implementation



- Important principle to separate
Policy: *What* will be done?
Mechanism: *How* to do it?
- Mechanisms determine how to do something, policies decide what will be done
- The separation of policy from mechanism is a very important principle, it allows maximum flexibility if policy decisions are to be changed later (example – timer to prevent a user program from running too long)
- Specifying and designing an OS is highly creative task of **software engineering**

OPERATING SYSTEMS

Implementation

- Much variation
 - Early OSES in assembly language
 - Then system programming languages like Algol, PL/1
 - Now C, C++
- Actually usually a mix of languages
 - Lowest levels in assembly
 - Main body in C
 - Systems programs in C, C++, scripting languages like PERL, Python, shell scripts
- More high-level language easier to **port** to other hardware
 - But slower
- **Emulation** can allow an OS to run on non-native hardware





THANK YOU

Pavan A C

Department of Computer Science & Engineering

pavanac@pes.edu