

Benchmark-Driven Multivariate Time Series Classification: The Role of the UEA MTSC Archive

ANTHONY BAGNALL, University of Southampton, United Kingdom

ALI ISMAIL-FAWAZ, IRIMAS, Université de Haute-Alsace, France

MATTHEW MIDDLEHURST, University of Bradford, United Kingdom

The UEA multivariate time series classification (MTSC) archive, released in 2018, has become the benchmark for MTSC research. We survey 142 peer-reviewed papers published from 2020 to early 2026 that evaluate general-purpose MTSC algorithms on at least one UEA dataset. We review the literature by model family, identify design trends, and analyse how the archive is used in practice. We find rapid post-2022 growth, especially in transformer and foundation-style models, widespread use of dataset subsets, and substantial variation in protocols, baselines, and code release. We conclude that MTSC needs stronger evaluation practice, better software support, and broader benchmark resources.

CCS Concepts: • **Computing methodologies** → **Supervised learning by classification**; *Neural networks*; • **General and reference** → **Surveys and overviews**.

Additional Key Words and Phrases: multivariate time series classification, benchmark archives, reproducibility, aeon, time series machine learning, deep learning classification

1 Introduction

Multivariate time series classification (MTSC) involves learning to assign labels to ordered observations recorded over multiple channels, sensors, or variables. It arises in a wide range of applications, including human activity recognition, medicine, speech analysis, industrial monitoring, and remote sensing, where the discriminative information may depend not only on temporal structure within each channel but also on how channels interact over time. This makes MTSC a challenging and diverse task: discriminative patterns may be local or long range, synchronous or misaligned, frequency-based and/or concentrated in only a subset of dimensions, which may vary over classes. Over the last decade, a broad range of approaches to MTSC have emerged, from elastic distance and feature-based methods to convolutional, graph-based, transformer, and foundation-style deep learning models. In such a varied field with a large number of publications, benchmarking becomes crucial for judging whether reported progress is real.

Benchmark archives are central to progress in machine learning. They provide a shared experimental framework, make comparison of algorithms easier, and often shape which questions a field treats as important. This is especially true in time series machine learning, where the literature spans many application areas, data types, and evaluation regimes. The UEA archive [7] has become the primary benchmark for MTSC since its release in 2018 and the subsequent bake off comparison of state-of-the-art classifiers [114]. In practice, for a large part of the literature, proposing a new classifier for MTSC means evaluating it on the UEA archive.

This has had a positive effect on the field overall. The archive gave researchers a common set of problems covering motion capture, handwriting, speech, biosignals, traffic, chemistry, and astronomy. It lowered the barrier to entry for work coming from deep learning, representation learning, graph learning, and, more recently, foundation-style time

Authors' Contact Information: Anthony Bagnall, University of Southampton, United Kingdom, anthony.bagnall@southampton.ac.uk; Ali Ismail-Fawaz, IRIMAS, Université de Haute-Alsace, France, ali-el-hadi.ismail-fawaz@uha.fr; Matthew Middlehurst, University of Bradford, United Kingdom, m.b.middlehurst@bradford.ac.uk.

series modelling. It also makes it possible to trace how the area changed, from early distance and feature-based methods, through bespoke neural architectures, to transformers and pre-trained backbones.

However, the use of the archive has not been uniform. Many papers use only a subset of the datasets without providing clear justification. Baseline choice is inconsistent. Experimental protocols vary. Code is not always released, and even when it is, the exact benchmark setup is often not easy to reconstruct. As a result, use of the UEA archive by itself does not guarantee that results are directly comparable.

Our aim is to characterise the research landscape in the context of the UEA archive. We are not simply cataloguing models that cite the archive. Rather, we use it as a way of understanding how a benchmark shapes a research area. The survey has three goals. First, it reviews the algorithmic literature by model family and tracks how design ideas developed. Second, it examines how the archive has been used in practice, especially in relation to dataset coverage, comparator choice, evaluation regime, and code availability. Third, we gather and compare published results and use them as a basis for assessing experimental methodology. Together, these give a picture both of the technical development of MTSC methods and of the benchmark culture that formed around the archive.

There are already two excellent surveys of deep learning for time series machine learning, but they address a different question. The review by Ismail Fawaz et al. [59] helped establish deep learning for time series classification as a coherent area, surveying neural architectures across the wider TSC literature, but it was focused primarily on convolutional approaches and only covered univariate time series classification. More recently, Mohammadi Foumani et al. [98] reviewed deep learning for time series classification and extrinsic regression, with a broad survey of neural model families, architectural choices, and empirical trends across the wider literature. Our survey addresses a different question. It is narrower in scope, focusing specifically on *multivariate* time series classification, and it is organised around the UEA MTSC archive as the benchmark that structured the literature. This allows us to examine both algorithm development and the benchmark practices shaping reported progress. We therefore place particular weight on dataset selection, recurring baselines, differences in evaluation protocol, code availability, and the credibility of cross-paper claims. The paper is also connected to the next stage of benchmark development through *aeon* [93] as a common software layer and the relaunch of the UEA MTSC archive as the Multiverse [96]. Our purpose is to examine how the UEA MTSC archive has been used, where it worked well, and where it constrained the literature, in order to clarify how the new Multiverse archive should be employed in the next phase of research that uses performance at MTSC as a partial or full justification of algorithm usefulness.

The main contributions of this survey are:

- (1) a benchmark-centred review of MTSC algorithms using the UEA archive, organised under a single-label taxonomy and accompanied by a synthesis of the main design trends across model families;
- (2) an analysis of how the archive has been used in practice, with particular attention to dataset selection, baseline choice, evaluation design, code release, and reproducibility;
- (3) a discussion of what this literature implies for future MTSC benchmarking, especially in relation to *aeon* and the Multiverse archive.

We use a large number of acronyms in this paper. To avoid cluttering the main text with repeated expansions, we provide a table of all acronyms and their full names in the supplementary material. We also provide a dedicated webpage containing the supplementary material, a BibTeX file for all papers included in the survey, and published results for the papers discussed in the comparative analysis ¹.

¹<https://github.com/aeon-toolkit/multiverse/survey>

The rest of the paper is organised as follows. Section 2 defines the survey scope and inclusion criteria. Section 3 briefly reviews the MTSC task, the role of the UEA MTSC archive in the literature, and introduces the taxonomy used in the remainder of the paper. Section 4 describes design themes that span model families. Section 5 reviews algorithms by category. Section 6 summarises the published results reviewed in each category and describes which findings are supported and which are not. We conclude by discussing what this benchmark history tells us about MTSC research and what it implies for future direction of research in Section 7.

2 Survey methodology

This is a focused survey of benchmark-driven MTSC algorithm research, not a complete survey of all work related to multivariate time series classification. Our aim is to study how the UEA MTSC archive has been used to support claims about new general-purpose MTSC methods, and how that use shaped the literature. The survey covers papers published from 2020 to early 2026.

The corpus was assembled by manually screening papers that cite one of the two UEA MTSC archive papers [7, 114] as recorded by Google Scholar. We then applied a simple set of inclusion criteria. A paper is included only if it satisfies all four of the following conditions.

- (1) **Peer-reviewed publication.** We exclude arXiv-only papers, unpublished manuscripts, and other non-reviewed sources.
- (2) **A general-purpose MTSC contribution.** We exclude papers whose main contribution is to a narrower subproblem or setting, such as class imbalance, missing values, semi-supervised learning, early classification, noisy labels, adversarial augmentation, or a domain-specific application.
- (3) **Evaluation on one or more UEA MTSC datasets.** Full-archive evaluation was not required. Many papers use only selected datasets, whether for computational reasons, architectural constraints, or continuity with earlier work. Since part of our purpose is to understand how the archive is actually used, such papers remain in scope. Some papers reference the archive for context.
- (4) **Citation of at least one archive paper.** Specifically, the paper had to cite at least one of the two UEA MTSC archive papers [7, 114]. This criterion is tied directly to the discovery process. It provides a transparent way to link the surveyed literature to the archive, but it also means the survey should not be read as a complete census of all papers that may have used UEA datasets. Some papers may use archive datasets without citing the archive papers, and such cases are likely to be missed.

We screened over 1000 papers that reference either [7] or [114] to yield a final corpus of 142 papers. The most common exclusion we applied was criteria (2) and (3): a large number of papers that referenced the UEA archive in the context of a domain-specific application study. This demonstrates how common MTSC is. We acknowledge that this is not a full survey of MTSC, but the selection criteria better suit our aim of understanding the literature that formed around the archive as a benchmark.

After inclusion, each paper was assigned to a single modelling category using the taxonomy defined in Section 3. For each paper, we also recorded the number of UEA datasets used, the number and identity of comparator algorithms, the nature of the evaluation protocol, and whether code availability was explicitly noted.

This methodology has clear strengths and limitations. It is transparent, tied directly to the benchmark we want to study, and yields a corpus that is closely aligned with the main question of the paper. Its limitations are equally clear:

discovery depends on citation behaviour, some relevant papers may be missed, and some metadata may be incorrect because it was collected manually.

3 MTSC and the UEA MTSC archive

Given a training collection $\mathbf{X} = [\mathbf{x}_1, \dots, \mathbf{x}_n]$ of multivariate time series, where each $\mathbf{x}_i \in \mathbb{R}^{d \times m}$, d is the number of channels, and m is the series length, the MTSC task is to learn a classifier that maps each labelled training case $(\mathbf{x}_i, y_i)$ to one of a finite set of class labels. Historically, univariate TSC (*i.e.*, $d = 1$) has received more research attention, largely driven by the UCR archive [23] and comparative studies using these data [8, 97]. In MTSC, useful information may lie not only in temporal structure within each channel, but also in interactions between channels over time. Multivariate time series have also become increasingly common with the growth of cheap and widely available sensors, helping to drive both the practical importance of MTSC and the recent growth of algorithmic research in the area.

Table 1. The 30 MTSC datasets in the UEA archive. The four unequal-length problems are indicated with an asterisk (*). For these we give both the minimum and maximum series lengths in the collection.

Dataset name	Train	Test	Channels	Length	Classes	Type
ArticularyWordRecognition	275	300	9	144	25	Motion
AtrialFibrillation	15	15	2	640	3	Biosignal
BasicMotions	40	40	6	100	4	Motion
CharacterTrajectories*	1422	1436	3	60-182	20	Motion
Cricket	108	72	6	1197	12	Motion
DuckDuckGeese	50	50	1345	270	5	Audio
ERing	30	270	4	65	6	Motion
EigenWorms	128	131	6	17984	5	Motion
Epilepsy	137	138	3	206	4	Motion
EthanolConcentration	261	263	3	1751	4	Spectro
FaceDetection	5890	3524	144	62	2	Biosignal
FingerMovements	316	100	28	50	2	Biosignal
HandMovementDirection	160	74	10	400	4	Biosignal
Handwriting	150	850	3	152	26	Motion
Heartbeat	204	205	61	405	2	Audio
InsectWingbeat*	25000	25000	200	2-22	10	Audio
JapaneseVowels*	270	370	12	7-29	9	Audio
LSST	2459	2466	6	36	14	Sensor
Libras	180	180	2	45	15	Motion
MotorImagery	278	100	64	3000	2	Biosignal
NATOPS	180	180	24	51	6	Motion
PEMS-SF	267	173	963	144	7	Sensor
PenDigits	7494	3498	2	8	10	Motion
PhonemeSpectra	3315	3353	11	217	39	Audio
RacketSports	151	152	6	30	4	Motion
SelfRegulationSCP1	268	293	6	896	2	Biosignal
SelfRegulationSCP2	200	180	7	1152	2	Biosignal
SpokenArabicDigits*	6599	2199	13	4-93	10	Audio
StandWalkJump	12	15	4	2500	3	Biosignal
UWaveGestureLibrary	120	320	3	315	8	Motion

Table 1 summarises the original 30 datasets in the UEA archive. More information is available in [114]. A third of the archive consists of human motion and activity data derived from accelerometers, gyroscopes, motion capture, or pen trajectories, such as **BasicMotions**, **Cricket**, **NATOPS**, **PenDigits**, and **UWaveGestureLibrary**. Eight of the datasets are biosignals, including ECG, EEG, and MEG, such as **AtrialFibrillation**, **FaceDetection**, **MotorImagery**, and **SelfRegulationSCP1/2**. The archive also contains several speech and acoustic benchmarks, including **JapaneseVowels**, **SpokenArabicDigits**, **DuckDuckGeese**, and **Heartbeat**, alongside smaller groups from traffic, astronomy, and spectroscopy. More generally, the underlying question of interest is whether, given two or more MTSC algorithms and

no prior knowledge of the data domain, there is any significant difference in predictive performance between them. The archive is intended to act as a practical proxy for this question by reducing dataset-selection bias in algorithm evaluation and thereby supporting a more objective comparison of methods. In principle, this is best achieved by evaluating on the full collection of problems. A narrower subset may still be appropriate when an algorithm is explicitly designed for a particular setting, such as motion data, or when there are clear practical constraints. However, to avoid concerns about cherry-picking, any restriction to a subset of the archive should be justified on methodological or domain grounds.

The UEA MTSC archive is cited by many kinds of papers, including application studies, work on related tasks such as imputation or semi-supervised learning, and papers proposing new algorithms for MTSC itself. We focus on the last of these, namely peer-reviewed papers that use the archive to support a methodological contribution to core MTSC. Even under that restriction the literature is large and has grown quickly. Using the current yearly survey files, we identify 142 archive-using entries from 2020 to early 2026.

To organise this literature, we assign each paper to a single algorithm family using the following priority order:

- (1) **Machine learning** for classical, non-deep feature or distance-based approaches, such as shapelet, dictionary, or feature-engineering methods.
- (2) **Convolutional** if it is primarily CNN or TCN based, including FCN and ResNet-style variants.
- (3) **Graph** if the core encoder uses an explicit graph construction and GNN-style propagation, such as GCN, GAT, hypergraph methods, or visibility graphs.
- (4) **Transformer** if it uses attention or patching within a transformer-style architecture.
- (5) **Foundation-style** if it explicitly involves pretraining or masked modelling, uses an LLM or in-context learning, or is presented as a backbone for multiple tasks or for general time series analysis.
- (6) **Deep other** for deep models with smaller numbers of papers not captured above, including pure recurrent, shapelet, generative, contrastive, autoencoding, or state-space based approaches whose main identity is neither convolutional, recurrent, transformer, nor graph-based.

When multiple categories were possible, we prioritised the author’s own classification. The taxonomy is necessarily approximate, but it is sufficient to identify broad trends. Table 2 gives the breakdown by year of citations for the archive

Table 2. Total citations (according to Google Scholar) and surveyed MTSC algorithm papers using the UEA MTSC archive, grouped by year and assigned category. Each paper is counted once under the single-label priority taxonomy. 2026 data are up to March.

Year	arXiv	Journal	Total	ML	Convolution	Graph	Transformer	Foundation	Other Deep	Survey Total
2020	33	0	33	3	3	0	0	0	1	7
2021	72	28	100	4	3	0	0	1	5	13
2022	99	100	199	2	6	2	3	2	0	15
2023	138	173	311	0	3	0	4	2	4	13
2024	197	174	371	6	2	5	9	6	10	38
2025	253	139	392	2	9	10	10	9	11	51
2026	61	29	90	1	0	0	1	1	2	5
Total	853	643	1496	18	26	17	27	21	33	142

and papers by category. The early literature is primarily classical and CNN-based methods. From 2022 onward the volume increases sharply. The first major wave is transformer-based from 2022, followed by foundation-style and large-model work. Graph methods also become more common from 2024. The other-deep category is more persistent than concentrated, growing into a large residual stream of hybrid, contrastive, shapelet-based, and state-space models.

The number of UEA datasets used in these papers varies considerably. The mean number of UEA datasets used is 18.63 and the median is 17. Only 38 papers evaluate on the full 30-dataset archive. By contrast, 48 use 10 or fewer datasets, 29 use 11-20, and 27 use 21-29.

The subset papers also tend to draw from a recurring core rather than choosing datasets at random. The most frequently recurring are SelfRegulationSCP1, SelfRegulationSCP2, Heartbeat, JapaneseVowels, FaceDetection, Handwriting, UWaveGestureLibrary, and EthanolConcentration. Several unequal-length problems and a few computationally awkward datasets are much less visible in the literature. In practice, the archive often acts both as a full benchmark suite and as a smaller inner benchmark of especially popular datasets.

The number and selection of algorithms compared also varies considerably. The mean number of compared methods is 8.72, the median is 9, and the maximum is 26. The most frequently recurring named comparators are TapNet, MLSTM-FCN, DTW-D, ED, DTW-I, ROCKET, WEASEL+MUSE, ShapeNet, and TST. Comparing so many algorithms on 30 or fewer datasets reduces the power of tests when adjustments for multiple testing are applied. For example, suppose we compare algorithms on nine datasets and the top ranked algorithm has higher accuracy on all datasets. If we test with a pairwise Wilcoxon signed-rank test, then it becomes impossible to detect statistically significant differences with eight classifiers if we make a Bonferroni adjustment for multiple testing and with 14 classifiers if we compare the proposed approach against alternatives and use the less conservative Holm correction.

Code availability is uneven: fewer than half of the surveyed papers have an explicit code link and some of these links are invalid. Experimental protocol is also inconsistent. The archive train/test split remains the default, but many papers augment it with internal validation, multiple seeds, repeated resampling, or cross-validation. There is a tendency to reuse baseline results from earlier studies rather than rerun all comparators directly. When papers use different subsets of datasets, compare against different baseline families, and vary in whether evaluation is based on a single split or repeated resampling, direct cross-paper ranking becomes difficult. Full details on the number of datasets and benchmarks and links to code are available in the supplementary material and the associated website.

The UEA MTSC archive succeeded in giving MTSC research a common evaluation resource. It did not produce a single shared protocol for how that resource should be used. The problem is that without stronger shared conventions there is too much room for partial and non-comparable evidence of superiority. Any new benchmark therefore needs to address both the data and the evaluation practice around it.

4 Themes in MTSC research

The category review in Section 5 traces the internal development of each model family. At the same time, the literature is driven by a set of recurring design problems that cut across categories. The most important of these are temporal structure and channel interaction, the shift from task-specific classifiers to reusable representations, the trade-off between accuracy, interpretability, and efficiency, and the way the benchmark itself shaped which ideas were rewarded.

4.1 Modelling temporal and cross-channel structure

The primary technical problem in time series classification is to identify discriminative temporal patterns. These patterns may be local or global, phase-dependent or phase-invariant, and may appear either as distinctive subsequences or through broader temporal dependence. In MTSC, this problem is more complex because the features that discriminate between classes may depend not only on what happens within each channel, but also on how channels relate to one another over time.

Useful information can arise at several levels. While some problems are driven mainly by patterns within individual channels, many depend on synchronous cross-channel structure, where several dimensions must be considered together at the same time. In human activity recognition, this may occur when an action is defined by the simultaneous coordination of multiple body parts, for example in jumping jacks, where arm and leg motion occur together and the discriminative signal lies in their coordinated timing across channels. By contrast, distinguishing sitting, standing, and lying with IMU data can often be achieved largely from channel-wise orientation and acceleration patterns, with cross-channel interaction playing a smaller role [15].

A further possibility is that the relation between channels evolves over time, for example when the same component patterns occur in different orders or with different temporal offsets. In such cases, the discriminative signal lies neither in any single channel nor in a fixed cross-channel snapshot, but in the temporal organisation of their interaction. In EEG, such structure can arise in standing and travelling brain waves. In standing waves there is no phase difference in patterns appearing in multiple channels, while in travelling waves a pattern may show systematic delays in appearance from channel to channel [103].

Many apparently different MTSC methods can be understood as alternative ways of modelling this combined temporal and cross-channel structure. Classical approaches often do so through representation design [115], feature extraction [94], and/or selective use of dimensions [104]. Time series distance measures commonly found in early MTSC algorithms make decisions on whether to encode cross-channel structure directly, taking channel dependent, independent or adaptive [116] approaches.

Deep learning methods address the same issue more directly through model architecture. Convolutional approaches typically begin with temporal filtering and then introduce mechanisms for combining information across channels, either implicitly through shared feature maps or explicitly through channel-mixing operations [21]. Graph-based methods make dependencies more explicit by representing channels, windows, or derived slices as nodes, with edges encoding similarity, dependence, or dynamic interaction [83]. Transformer-based methods instead use input encoding and attention to learn which time steps or channels should interact, with the aim of capturing long-range and cross-channel dependencies adaptively from data [35].

A large part of the MTSC literature is organised around the same underlying design question: how should a model represent dependencies across time and across dimensions? Different model families answer this question in different ways, but are targeting the same underlying modelling challenge of discovering and capturing these dependencies where they exist.

4.2 The rise of general purpose models

A second major theme is the shift from task-specific MTSC classifiers towards models whose main purpose is reuse across datasets, tasks, or domains. One strand is self-supervised and contrastive representation learning. Here the model is trained without labels using objectives such as masking, reconstruction, contrastive agreement, or temporal discrimination, with the aim of learning features that transfer well to downstream tasks including MTSC. In this setting, evaluation concerns not only predictive performance on one benchmark, but also how well the learned representation generalises across datasets, tasks, and temporal scales.

A related but broader strand consists of task-general backbones. These are architectures presented for multiple time-series problems, such as classification, forecasting, imputation, anomaly detection, and regression. Although they are not pre-trained in the strict foundation model sense, they are often called foundation models. Their role is less that of a bespoke MTSC classifier and more that of a reusable modelling framework for time-series analysis.

A third strand uses language-model-based adaptation. These approaches treat MTSC as a downstream target within a broader language-model pipeline, for example by reprogramming time series as token sequences, prompting an LLM, aligning temporal embeddings with language representations, or using an LLM as part of the inference process. Their significance lies less in transfer through a shared time-series backbone and more in adapting ideas from large language modelling to temporal data.

Taken together, these developments reflect a broader move towards general-purpose models in time-series machine learning. They also make comparison more difficult, because a bespoke MTSC classifier, a transferable representation learner, a task-general backbone, and an LLM-based adaptation method are not all trying to demonstrate the same kind of progress.

4.3 Interpretability, efficiency, and deployment trade-offs

A third theme relates to the practical application of MTSC models. Concerns about interpretability, efficiency, scalability, or deployability often shape the architecture as much as predictive performance does.

Interpretability is most visible in the classical stream, where rule-based, feature-based, and pattern-based approaches remain attractive because their decisions can be inspected, but it also appears in deep learning and Graph methods, since the relational structure is explicit even when it is learnt rather than known in advance.

Efficiency forms a parallel thread. Some CNN and transformer papers focus on reducing model size, simplifying attention, or making deployment lighter. This is especially visible in recent work on compact backbones and selective state-space models. The persistence of such work suggests that, although the UEA MTSC archive is modest in size by modern deep learning standards, it still serves as a test bed for methods intended for broader practical use.

4.4 The usage of the UEA archive

The archive is a common reference point in MTSC research, but there is significant variation in how it has been used. Many papers evaluate on subsets of datasets rather than on the full archive. Unequal-length problems are often dropped, large or awkward datasets are sometimes avoided, and a small group of popular datasets is repeatedly reused as a de facto inner benchmark. This is understandable in practice, since computational cost, architectural constraints, and continuity with earlier work all shape what can be evaluated. However, it also creates a risk of selective evidence, especially when papers do not clearly justify why particular datasets were included or excluded.

Variation in experimental methodology adds a second layer of difficulty. The archive provides fixed train and test splits, and many papers use these directly. Others introduce an additional validation stage, for example by splitting the training set again for model selection, which is methodologically reasonable when done transparently. The more problematic cases are those in which the test split appears to influence model design, hyperparameter choice, or reporting decisions. Even when there is no explicit leakage from the test data, repeated informal tuning against the same archive benchmark and hard-coded parameter settings for individual datasets can blur the distinction between development and final evaluation. As a result, the same nominal benchmark may support rather different experimental practices.

Comparison is further weakened by inconsistency in comparator choice and reporting. Some papers rerun a strong common set of baselines under the same protocol, while others compare against only a narrow subset or reuse results reported in earlier studies without fully matching the present evaluation regime. Reported gains can therefore depend on which datasets were selected, which baselines were included, and how much tuning was effectively done against the

benchmark, as well as on the proposed model itself. This creates scope for cherry-picking, whether through selective dataset coverage, selective baseline choice, or emphasis on only the most favourable results.

In that sense, the archive has sometimes functioned more as a shared symbolic benchmark than as a fully standardised experimental protocol. The UEA MTSC archive was highly successful in creating a common MTSC literature, but dataset adoption alone did not yield reproducible cumulative evidence. That gap is one reason why the field now needs stronger software infrastructure and benchmark curation.

5 Algorithms by category

We now turn from the cross-cutting themes to the category-by-category literature. Each paper is assigned to one principal family using the priority order defined in Section 3. This keeps the taxonomy manageable at the cost of hiding some secondary design choices. Graph-transformer hybrids are therefore placed under Graph, CNNs with auxiliary attention remain under Convolutional unless the encoder is fundamentally transformer-based, and general-purpose pre-trained or LLM-driven systems are grouped under Foundation. The discussion below follows each category as a chronological design narrative.

We begin with machine learning approaches because they provide much of the pre-deep-learning background against which later work developed, and because many of them remain important comparators throughout the archive era. Although the recent MTSC literature is dominated numerically by deep models, classical methods continue to matter both as benchmarks and as sources of strong inductive biases.

5.1 Machine-learning models

The machine-learning literature on the UEA archive forms a smaller but persistent stream alongside deep learning. Its defining characteristic is that representation building is usually kept separate from prediction. Rather than learning features and decision rules jointly in an end-to-end architecture, these methods typically construct an explicit intermediate representation first, for example symbolic words, summary statistics, signatures, rules, pattern counts, or selected views of the input, and then apply a conventional classifier or ensemble. In that sense, this category remains closer to the classical TSC tradition of transforms, feature engineering, and heterogeneous ensembling than to the representation-learning logic that dominates recent deep models.

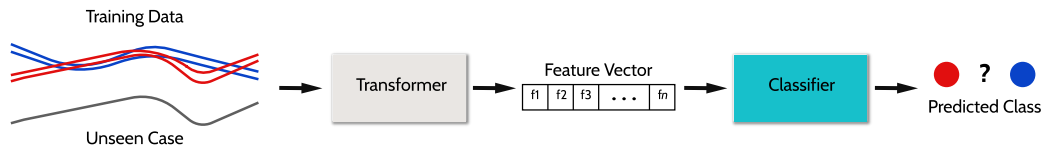


Fig. 1. Example of a pipeline-based time series classifier.

A useful way to organise this literature is to distinguish transform-plus-classifier pipelines from selector methods, integrated classifiers, and ensembles. Pipeline methods, illustrated in Figure 1, first map a multivariate series into a derived feature space and then train a separate predictor on that representation. Selector methods instead identify informative channels, dimensions, or views before downstream classification, while integrated classifiers and ensembles combine multiple classifiers or multiple representations without collapsing them into a single intermediate transform, as illustrated in Figure 2.

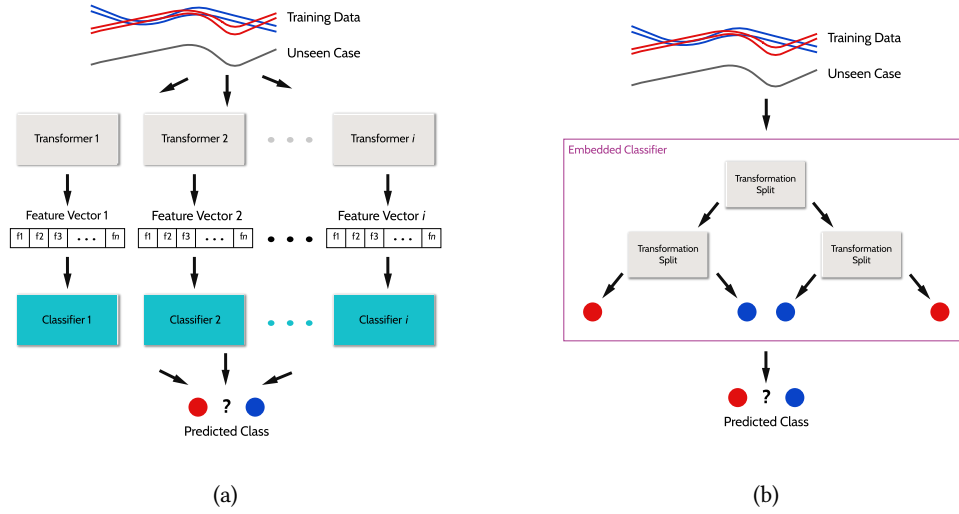


Fig. 2. Examples of machine-learning time series classifiers: (a) an ensemble-based classifier, and (b) an embedded or integrated classifier.

5.1.1 Feature engineering and variable selection. The earliest machine-learning papers using the archive return to classical representation design rather than deep sequence modelling. **MSAX** [5] extends **SAX** [81] to multivariate data through covariance-aware discretisation, producing a symbolic representation that can then be classified in a conventional way. **MI-FSS** [53] and **MTS** [65] focus more narrowly on identifying informative dimensions, using mutual-information or classifier-based criteria to reduce the multivariate input before downstream classification. These are therefore better understood as wrapper-style selection procedures than as full transform pipelines.

This classical orientation broadened in 2021 into richer engineered representations. **CMFMTS** [10] builds interpretable multivariate feature vectors from complexity measures, while **F4** [87] combines frequency-domain and wavelet-derived summaries with a random forest. In both cases the main modelling work lies in the representation, with the final predictor acting as a standard learner over engineered features.

A related line derives features from randomly selected subintervals rather than modelling the whole series at once, making it particularly suitable when the location of a discriminative pattern matters. Of the many interval-based classifiers proposed for univariate TSC, **CIF** [94] is the only one also evaluated on the UEA archive. CIF is a random-forest-type ensemble that samples different random intervals for each base classifier and computes a range of summary statistics on each interval to form the feature set. Its multivariate extension is straightforward, drawing intervals from random dimensions. The method was later extended into **DrCIF** [95], which also extracts features from transformed representations such as the first-order difference. Beyond its standalone performance, its main historical importance here is that it strengthens the interval component later used in the **HIVE-COTE** family.

5.1.2 Pattern, shapelet, and symbolic transform methods. A second strand centres on symbolic patterns, shapelets, and rule extraction. **RT** [9] follows an explicitly two-stage design, discovering shapelets and then converting them into temporal association rules for classification in the resulting rule space. **PETSC** [33] similarly mines multiscale,

variable-length sequential patterns and learns a linear classifier on the derived embedding. These are among the clearest examples of transform-plus-classifier design in the MTSC literature.

The same logic reappears in several later papers. **FS-MVC** [48] combines multiview feature construction, feature selection, and voting across downstream classifiers. **Z-Time** [71] emphasises interpretable temporal abstractions and interval relations across channels. **EE-TSS** [108] constructs engineered feature representations based on signature-style descriptors, while **BORF** [117] and **BOP** [130] continue the symbolic and bag-of-patterns tradition in multivariate form. **GSM** [107] fits naturally in the same group, using signature and logsignature transforms as a feature-extraction stage before conventional prediction. Across these papers, the central modelling choice is the construction of a useful derived representation on which a standard classifier can operate.

5.1.3 Ensemble and heterogeneous representation methods. A broader stream is organised around combining predictors or views of the data. **MTSPF** [165] adapts proximity-forest ideas to MTSC through ensembles of distance-based trees. **EP/IEP** [14] studies conformal and ensemble prediction over dimension-wise predictors and their aggregation. **FedDict** [79] extends dictionary-style classification to the federated setting, while **TimeCIEL** [73] continues this direction through contextual interactive learning over multiple base classifiers. These papers differ in mechanism, but they share the idea that performance can be improved by combining multiple predictors or multiple representations.

This ensemble strand is anchored by the **HIVE-COTE** family. The 2021 MTSC bake-off [114] established **HIVE-COTE 1.0** and **ROCKET** as two of the few methods clearly ahead of the standard dependent-DTW baseline on the UEA archive, alongside InceptionTime [32] and CIF. **HIVE-COTE 2.0** [95] develops this line further. Its core claim is that no single representation is uniformly best, so the most accurate strategy is to combine strong classifiers built from different representation domains. HC2 therefore replaces major HC1 components and combines a dictionary-based classifier, **TDE**, an interval-based classifier, **DrCIF**, a **ROCKET**-derived convolutional ensemble, **Arsenal**, and the shapelet-based **STC**, with predictions combined using CAWPE-style [68] probability weighting. The result is a heterogeneous meta-ensemble designed to exploit complementary representations.

This update is important for the MTSC literature because it shows how the classical ensemble philosophy evolved in response to the benchmark itself. The HC2 paper reports that HC2 is significantly more accurate than DTW-D, **ROCKET**, HC1, and CIF on the 26 equal-length UEA datasets, while also improving usability through contracting, checkpointing, and a fully multivariate implementation. The underlying principle remains the same: stronger results can be obtained by combining a small number of classifiers built on different views of the series.

Taken together, the machine-learning papers show that classical MTSC research remains methodologically diverse even as deep learning becomes dominant. Some focus on channel selection, some on engineered features, some on symbolic or rule-based transforms, some on interval representations, and some on heterogeneous ensembling. What links them is a common preference for deliberate representation design, modular prediction, and the view, made most explicit by **HIVE-COTE**, that no single representation is likely to be uniformly best across the archive.

Four used fewer than 10 UEA datasets, and six used 25 or more of the archive, with three evaluating all 30 UEA datasets. The number of baselines varies from 1 to 20 and, ignoring obvious naming variants, there are roughly 75-80 distinct baseline algorithms across these papers. These include standard archive baselines such as ED/DTW variants, TSF, CBOSS, CIF, STC, **ROCKET**, Mini**ROCKET**, **HIVE-COTE** and HC1, **TDE**, **DrCIF**, **WEASEL+MUSE**, TapNet, ResNet, InceptionTime, TS-CHIEF, and Proximity Forest, alongside more specialised comparators such as shapelet-, rule-, and pattern-based methods, conformal and ensemble variants, federated baselines, and standard tabular learners such as random forest, support vector machines, logistic regression, XGBoost, and GRU-based back ends. The category

is therefore methodologically diverse, but its comparison ecology remains recognisably classical. Even when these papers compare against strong deep-learning baselines, they continue to be organised around explicit representations, modular pipelines, and heterogeneous ensembles. This reinforces the role of the machine-learning literature as both the historical foundation of MTSC benchmarking and an enduring source of strong reference methods.

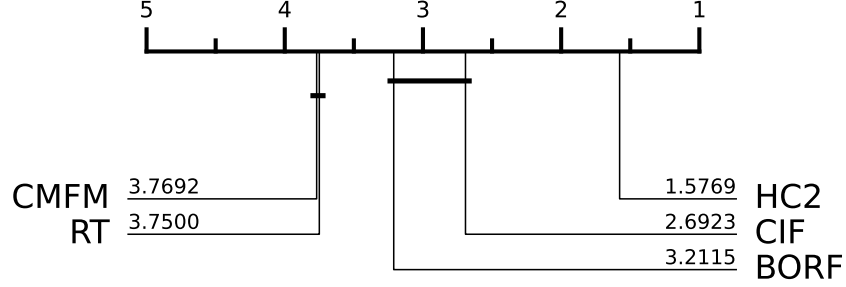


Fig. 3. Comparison of published results for ML MTSC algorithms on the 26 equal-length UEA datasets. Solid bars cover groups of classifiers for which there is no significant difference.

Five of the six papers that use 25 or more UEA datasets have code available. Inspection of the available code reveals no obvious source of bias. We can extract results for 26 datasets for five models: HIVE-COTE 2.0 [95], RT [9], CIF [94], BORF [117], and CMFM [10]. Results for RT and CMFM are presented for multiple configurations. We take the best-performing variant for reference, while noting that this may introduce some selection bias.

The published results for these five are presented in the appendix in Table 4. As in the bake-off [114], we summarise the results in Figure 3 using average ranks, then group classifiers into cliques within which there is no significant difference, as judged by pairwise Wilcoxon signed-rank tests with the Holm correction for multiple testing on each clique formation, using $\alpha = 0.1$.

5.2 Convolutional models

Convolutional methods [92] have become a cornerstone in image analysis due to their ability to automatically learn hierarchical feature representations [70]. In image-related tasks, these methods rely on two-dimensional filters that traverse the height and width of an image, capturing spatial patterns such as edges, textures, and shapes. When applied to time series data, the same principle is adapted to a one-dimensional setting, where filters move along the sequence over time (see Figure 4). This allows the model to detect temporal structures, short-term patterns, and dependencies within the data stream. Given an input time series $\mathbf{x}$ of length L and M channels, a single convolution filter $\mathbf{w}$ of length K applied to one channel m produces:

$$o_t^m = \sum_{k=1}^K x_{t+k-1}^m \cdot w_k \quad (1)$$

where o_t^m is the output of the convolution operation at time stamp t and channel m .

Convolutional models are the earliest sustained deep-learning stream in the UEA MTSC literature and remain one of its most important reference families. Their early appeal is straightforward: CNNs provide a strong, scalable baseline and

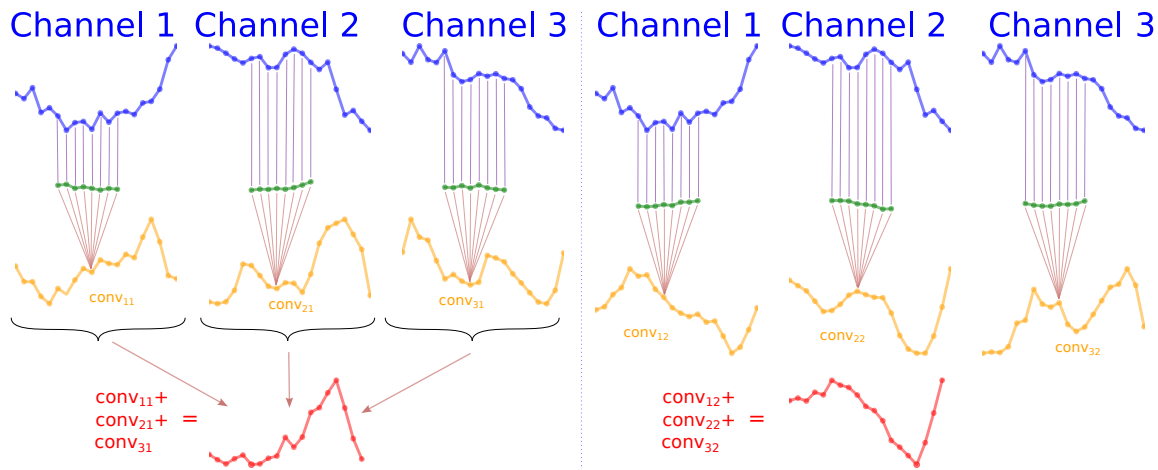


Fig. 4. One dimensional convolution applied on a multivariate time series (taken from [54] with permission).

naturally support local pattern extraction, but they must be adapted to handle both temporal structure and cross-channel interaction. Early CNN models such as **InceptionTime** [32], ensembles [2] of Inception models, focused primarily on univariate TSC and were naively adapted to MTSC with assumed channel independence. The first MTSC-specific papers in 2020 addressed channel interaction directly. **CA-SFCN** [47] added cross-attention to a fully convolutional architecture, **CT_CAM** [21] inserted channel-wise and temporal-wise attention into standard CNN backbones, and **TapNet** [163] combined CNN feature extraction with prototype-based classification and a semi-supervised variant.

The next stage of papers in 2021 improved how convolution handles the multivariate structure itself. **Disjoint-CNN** [36] factorised convolutions into temporal and spatial parts to model channel interaction more efficiently. **GM-FCN** [119] transformed series into Gaussian parameter representations before convolutional processing. **XCM** [31] coupled a compact CNN with faithful localisation-style explanations, making it one of the clearer interpretable deep baselines on the archive.

2022 saw a range of convolution-centred refinements. **AC-LSTM** [164] attached recurrent modelling to snapshot-style CNN feature extraction, but remains a primarily convolutional approach under our taxonomy. **DA-Net** [17] combined local-global feature fusion with windowed sparse self-attention. **DSN** [140] explored dynamic sparsity in kernels to adapt receptive fields, **Multichannel CNN** [105] re-encoded multivariate series as analogue images for transfer learning with ResNet50, **TCRAN** [169] coupled residual convolution with channel attention and time correction, and **dCAM** [13] strengthened the explainability side of CNN-based MTSC by producing dimension- and time-aware activation maps.

After that, the 2023-24 narrative shifts from architectural viability to optimisation and specialisation. **Adacknet** [161] used reinforcement learning to search dilated convolution kernels, **Conv-GLU** [82] introduced gated local feature extraction inside an Inception-like design, and **POPNASv3** [29] used multi-objective neural architecture search for convolutional cells. **AdaFSNet** [125] then made kernel size adaptation explicit, while **TPS** [1] proposed plug-in temporal attention modules for existing CNN backbones.

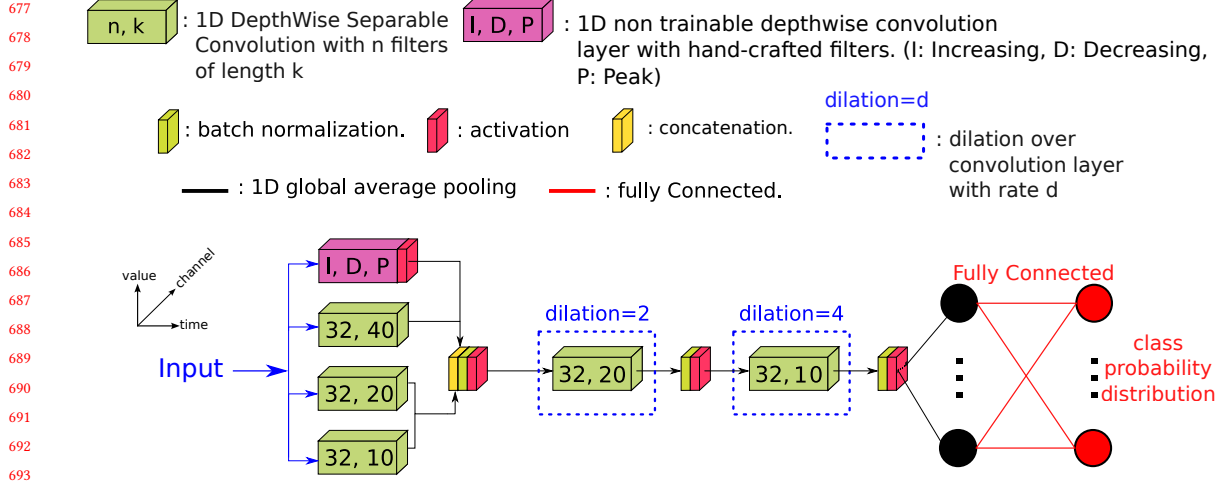


Fig. 5. The LITEMV architecture (taken from [56] with permission).

The 2025 papers show that CNN research on the archive is still active, but increasingly shaped by frequency modelling and lightweight architectural tweaks rather than radical redesign. **DCA** [45] used DCT-based channel attention, **DM-FCN** [162] revisited dilated convolution for time-series learning, **FQN** [106] explored quanvolutional processing, **FreConvNet** [121] added frequency-adaptive learning, **HDTCNet** [41] proposed hybrid-dimensional convolution, **LITEMVTime** [57] revisited the LITEMV design philosophy for efficient TSC (see Figure 5), **RE-ModernTCN** [4] re-examined ModernTCN for classification specifically, **SCNet** [138] focused on spectral convolution, and **TEAM** [112] added another recent CNN-family variant. Overall, convolutional work on the UEA archive evolves from establishing strong deep baselines to refining kernel design, feature fusion, interpretability, and spectral processing.

18 of the 26 convolutional papers had explicit links to source code. Nine used fewer than 10 datasets, and only six used 25 or more of the archive. The number of baselines varies from 3 to 13, and there are approximately 90 distinct baseline algorithms used in these papers. These include results from the original archive bake off [114] and other classifiers described in the survey.

Figure 6 shows the ranks of the six classifiers with 25 or more results on the 21 datasets they have in common. A solid bar covering algorithms means there is no significant difference between them (using a Wilcoxon signed-rank test with Holm correction for multiple testing, $\alpha = 0.1$). On the face of it, there are two clear groups, and HDTCNet, FreConvNet and TPS are significantly better than LITEMVTime, Disjoint-CNN and XCM. However, there are methodological problems with algorithms in the top clique: HDTCNet² uses the test split for early stopping; FreConvNet³ uses the test set in the training pipeline for model selection, evaluating the performance of the model at each epoch on the test and keeping the best; and TPS⁴ performs checkpoint selection using the test split, not by the held-out validation split. There is no evidence of leakage for the three classifiers in the bottom group. This means the initial conclusion of superiority cannot be trusted.

²<https://github.com/Guuuli/HDTCNet>

³<https://github.com/yingxiatang/FreConvNet/blob/main/model/FreConvNet.py>

⁴<https://github.com/mehryar72/TimeSeriesClassification-TPS>

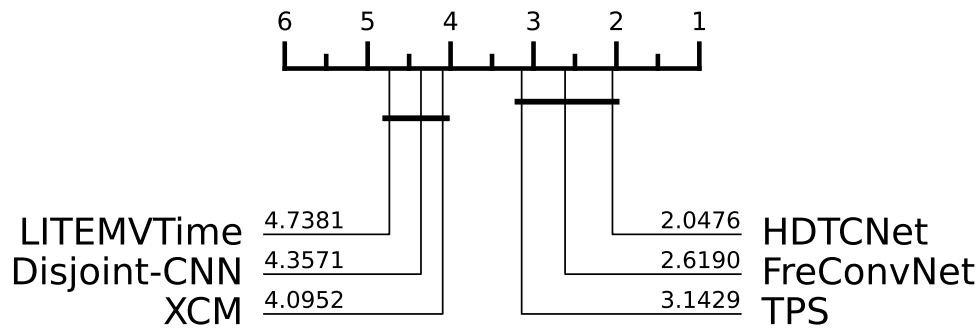


Fig. 6. Relative accuracy average ranks of six convolutional classifiers with test results for the common 21 datasets. Full results are in Appendix Table 5.

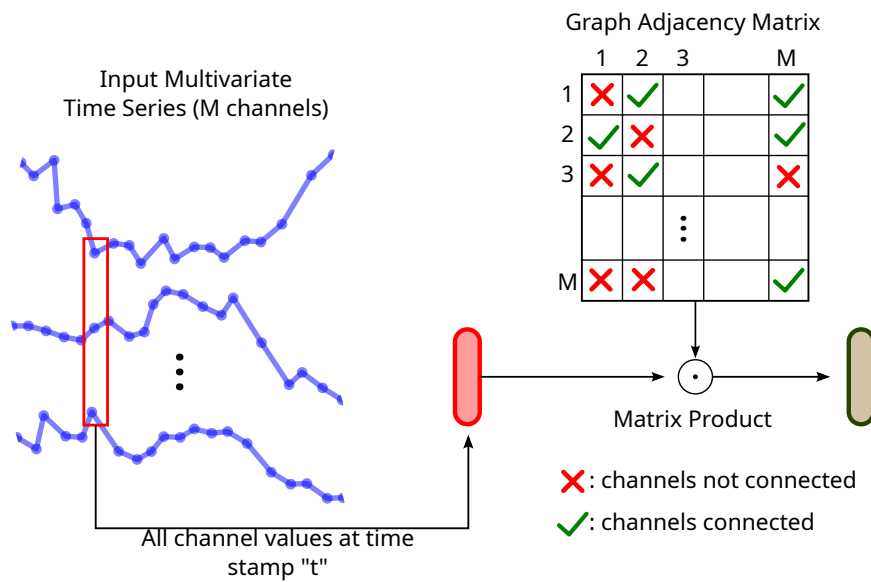


Fig. 7. Graph operation applied on a multivariate time series.

This illustrates the value of a transparent scikit-learn-style estimator interface with a clear delineation between fit and predict, since it means all validation must be in the fit function. It requires much more transparent data structures: many implementations store the train and test data in the same container, making it hard to verify the lack of leakage.

5.3 Graph-based models

Graph neural networks (GNNs) (see Figure 7) offer a simple way to model multivariate time series by treating the d channels as nodes of a graph and using the edges to represent dependencies between them. Given an input time series $\mathbf{x}$ of length m and d channels and an adjacency matrix $\mathbf{A} \in \mathbb{R}^{d \times d}$, a graph layer updates each channel by combining its own information with that of its neighbouring channels. After adding self-connections and normalizing the adjacency matrix, the graph propagation can be written as

$$\mathbf{o} = \sigma(\tilde{\mathbf{A}}\mathbf{x}\mathbf{W}) \quad (2)$$

where $\tilde{\mathbf{A}}$ is the normalized adjacency matrix, $\mathbf{W}$ is a learnable projection matrix and $\sigma(\cdot)$ is a non-linear activation function.

Here, $\tilde{\mathbf{A}}\mathbf{x}$ aggregates information across related channels, allowing each node to incorporate context from its neighbours, while $\mathbf{W}$ transforms the aggregated features into a new representation. The resulting output $\mathbf{o}$ therefore provides a compact encoding of the original MTS that explicitly reflects the graph structure between channels.

Graph-based MTSC starts from the premise that multivariate series are not just sequences but structured systems, where channels, windows, or derived states interact through an explicit relational topology. The earliest papers therefore focused on graph construction and pooling. **MTPool** [28] learned graph structure from slices of the input and then performed hierarchical graph coarsening, while **SimTSC** [158] reframed classification as node prediction on a similarity graph, linking instance-based neighbourhood structure with a GNN classifier.

After these initial studies, graph formulations diversified rapidly. In 2024, **CATodyNet** [44] used dynamic temporal graphs with cross-attention, **HyperTime** [151] promoted hypergraph and evolving-graph views, **MagNet** [49] paired wavelet representations with hierarchical graph coarsening, **TF-Net** [72] fused time-domain and frequency-domain processing before graph convolution, and **RTNet** [40] explicitly modelled relational and temporal structure through graph-based interaction over multivariate representations.

By 2025, graph work had become one of the main homes for explicitly modelling multiscale and cross-channel structure. **CTSA** [25] used heterogeneous graph representations, **DET-DyAGCN** [43] proposed dynamic graph attention aggregation, **DVG-CL** [141] combined graph and hypergraph views under contrastive learning, **GSTT** [160] coupled decomposition with multi-scale temporal correlation, **KDP-MHL** [89] made hypergraph learning key-point aware, **MH-TFFN** [62] fused Mamba-style sequence modelling with hypergraphs, **MuPaST** [76] tackled temporal covariate shift through multi-period spatio-temporal representation learning, **RP-GCN** [64] revisited recurrence-plot GCN ideas, **STOP** [86] broadened the focus to out-of-distribution patterns, and **TV-Net** [155] used temporal-variable graph-style feature harmonisation and interpretation to model interactions across time and variables. Graph methods have moved from learning a single useful topology to managing richer relational views of the same multivariate signal.

Seven of the 17 graph papers had explicit links to source code. Two used fewer than 10 UEA datasets, and seven used 25 or more of the archive. The number of baselines varies from 6 to 19 and there are about 70-75 distinct baseline algorithms across these papers. These include ED/DTW variants, WEASEL+MUSE, HIVE-COTE, MiniRocket, TapNet, and ShapeNet, alongside newer graph, transformer, and self-supervised methods discussed elsewhere in the survey.

There are issues with the methodology used by all of the algorithms that reported 25 or more datasets: STOP reports only archive-level average performance and has no associated repository; HyperTime combined train/test splits and used 80/10/10 train/validation/test division, so the results are not directly comparable to algorithms using the train/test split; DET-DyAGCN uses the test data as validation; MagNet has no explicit link to code in the paper (we found a

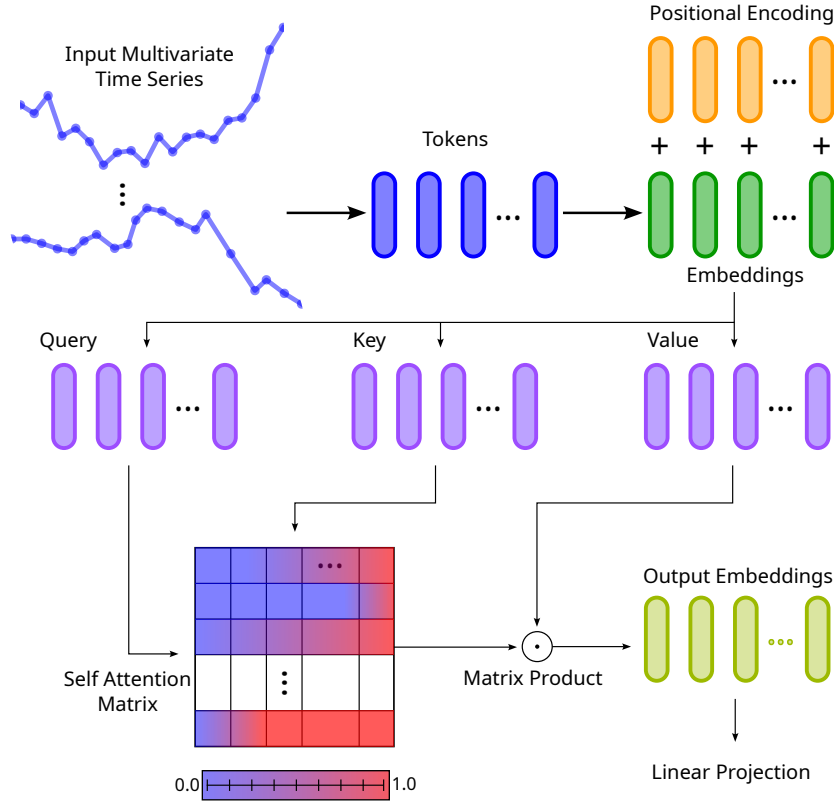


Fig. 8. Temporal Self-Attention applied on a multivariate time series.

GitHub repository, but it is for forecasting, not classification). GSTT has no linked source code. TV-Net uses the default train/test splits and reports mean and standard deviation over five runs, but also has no source code we could find. This variation in practice makes it hard to compare graph methods to each other and algorithms of other classes.

5.4 Transformer-based models

Transformer models approach time-series classification through attention-based sequence modelling, learning dependencies between time points directly rather than through recurrence. This allows them to represent both short-range and longer-range temporal structure within a common framework. In the multivariate setting, attention can also be used to model relationships across channels as well as over time. These properties have made transformer-based architectures an increasingly common design choice in MTSC.

To illustrate this process of a Transformer on an MTS, consider a time series $\mathbf{x}$ of length m and d channels (see Figure 8 for more details). Assuming this representation has already been generated by preceding feature extraction layers, the self-attention mechanism refines it through the following sequence of operations:

First, positional encoding is added to incorporate order information, as self-attention alone does not capture sequence position. For each time step t , the positional encoding is combined with the corresponding feature embedding, allowing the model to account for both content and position. Second, the sequence augmented with positional encoding is

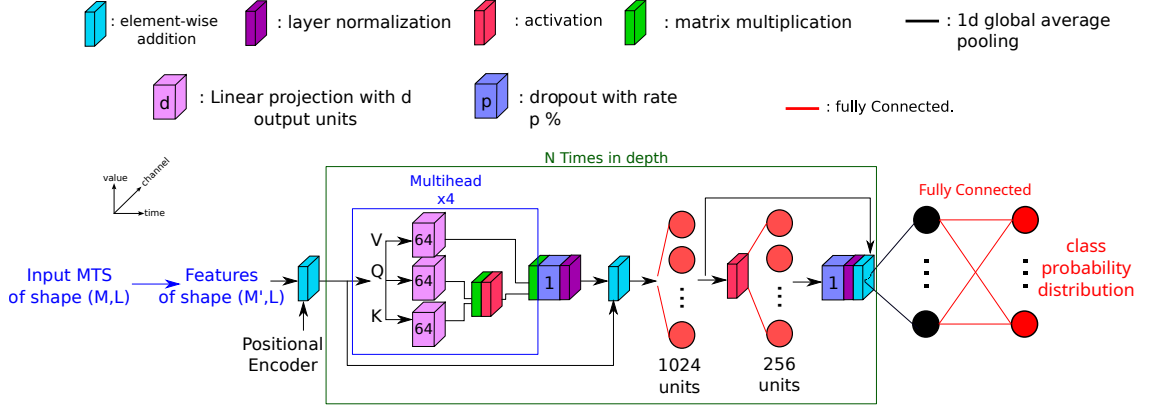


Fig. 9. The Vanilla Transformer (VanTran) architecture for Rehabilitation MTSC, taken from [56] with permission.

linearly projected into three distinct representations: Query (**Q**), Key (**K**) and Value (**V**). These representations are used to compute the attention scores and generate a new sequence that integrates this contextual information:

$$\mathbf{o} = \text{softmax} \left(\frac{\mathbf{Q} \odot \mathbf{K}^T}{\sqrt{d_{model}}} \right) \odot \mathbf{V} \quad (3)$$

where $\odot$ denotes the standard matrix multiplication and d_{model} is the dimensionality of the projected space.

Finally, the output MTS $\mathbf{o}$ of dimension d_{model} is then projected to the original input dimension d using a simple linear projector. An example Transformer-based architecture, the VanTran model for Rehabilitation MTSC [109], is presented in Figure 9.

Transformer-style MTSC papers first appeared in 2022 with the rapid rise in popularity of attention-based models. The first papers in this stream in 2022 focused on the attention mechanism itself. **FlowFormer** [135] proposed Flow-Attention as a linear-time alternative motivated by flow conservation, while **FourierFormer** [102] and **GFISHformer** [101] both tried to make transformer attention more efficient or less redundant without abandoning the standard transformer framing.

In 2023, the transformer papers became more MTSC-specific. **FormerTime** [20] and **MCTNet** [139] both hybridised convolution and attention, but still treated tokenisation and self-attention as the architectural core; **MF-Net** [26] added another multifeature transformer variant; and **Primal-Attention** [19] proposed a redesign of self-attention to improve efficiency.

By 2024 the emphasis had shifted from generic attention blocks to design choices tailored to multivariate series. **AutoLDT** [128] used spatio-temporal decoupling and AutoML to lighten the transformer pipeline. **ConvTran** [35] focused on positional encoding, proposing tAPE and eRPE for long and variable-length multivariate inputs. **CTNet** [159] guided classification by reconstructing crucial timestamps through a Gaussian-prior encoder and data-driven masking. **DCSformer** [129] introduced dynamic chunking, **DTCM** [145] added capsule mutual distillation, **MEDT** [77] combined multiview feature construction with an encoder-decoder stack, **MSTformer** [137] and **STIFformer** [167] both strengthened spatial-temporal interaction modelling, and **ShapeFormer** [69] explicitly merged transformer processing with the shapelet tradition.

The 2025 wave is even more specialised, suggesting that transformer design in MTSC had moved from simple adoption to micro-architectural optimisation. **CAB** [100] targeted correlated attention; **CSTFormer** [111] used Fourier filtering with multiscale temporal and spatial attention; **DTWformer** [153] introduced alignment-aware continuous online processing; **Hformer** [120], **KATN** [142], and **MD-Former** [27] each proposed different hierarchical, kernelised, or dual-branch formulations; **PBC-CSA** [42] injected prototype-based fuzzy attention; **PatchMTSC** [131] pushed patching as the key abstraction; **SGN** [150] adapted the Swin idea to timestep windows; and **Sliding-window Transformer + DTW similarity** [133] combined transformer features with similarity measurement. **TFTN** [50] continues this line by integrating time-frequency features with multiscale transformer extraction. Across the category, the story is one of progressive MTSC-specific specialisation: first efficient attention, then multiscale tokenisation, then explicit modelling of channels, windows, frequencies, and shape information.

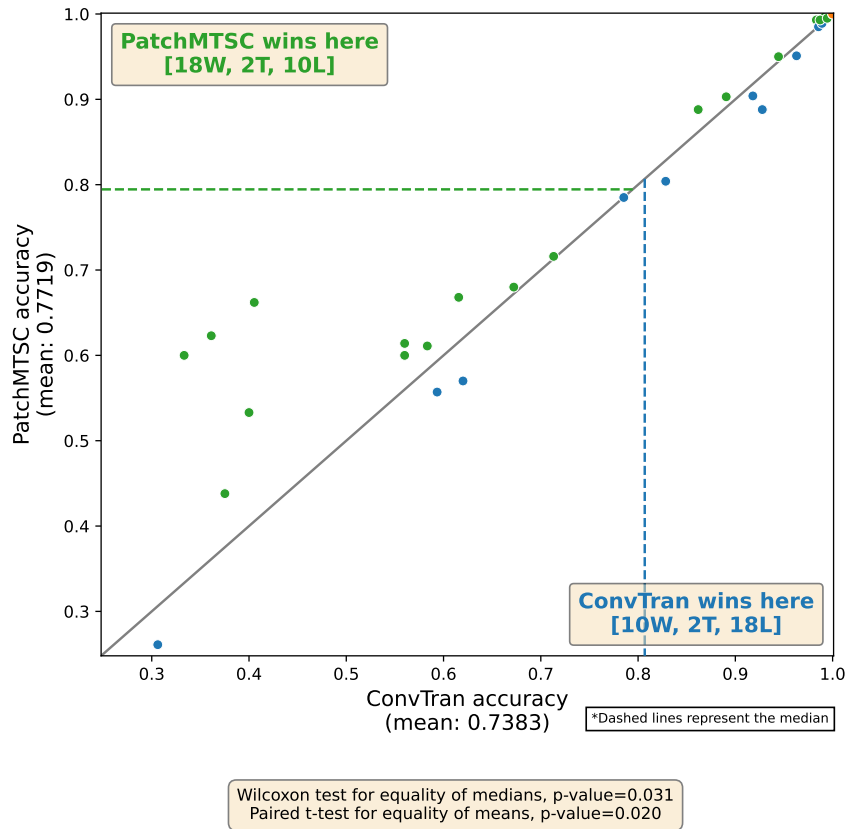


Fig. 10. A scatter plot of test set accuracies of PatchMTSC vs ConvTran.

To assess whether this increasing complexity represents genuine improvements, we once again compare reported performance and reproducibility on the UEA archive. Two used fewer than 10 UEA datasets, and 13 used 25 or more of the archive. Of those 13, only five provide a link to source code: CTNet, ConvTran, ShapeFormer, PatchMTSC, and SGN. On inspection of the code, we find that ShapeFormer uses the test set as the evaluator during training and that SGN uses a bespoke train/test split. CTNet reports results averaged over five runs and the released code reports best-seen

test accuracy during training. Thus, ConvTran and PatchMTSC are the only algorithms with results we have confidence in. Figure 10 shows the accuracy scatter plots of ConvTran and PatchMTSC. It appears that PatchMTSC significantly outperforms ConvTran, but we stress we are only presenting published results.

5.5 Foundation-style models

A foundation model is usually understood as a model pre-trained on broad data and then adapted to specific downstream tasks or domains. In time-series research, however, the term is often used more loosely to include true foundation models, self-supervised pre-training methods, and task-general backbones that are reused across forecasting, classification, anomaly detection, and related tasks. We therefore use the term *foundation-style* for papers that treat MTSC primarily as a *downstream evaluation setting* for reusable representations, pre-trained models, or task-general sequence architectures, rather than as a problem of designing a bespoke classifier specifically for MTSC. Not all papers in this section are foundation models in the strict sense of broad pre-training followed by downstream adaptation. Some are instead better understood as transferable self-supervised representation learners or as general-purpose backbones that are presented as reusable across tasks. This is the key distinction from Section 5.6: self-supervision or contrastive learning alone is not sufficient for inclusion here unless the paper’s main claim concerns transfer, reuse, or cross-task generality.

Within this broad group, it is useful to distinguish three overlapping strands. The first consists of self-supervised pre-training methods that aim to learn transferable representations. The second consists of task-general backbones that are proposed for multiple time-series problems, even when they are not pre-trained in the strict foundation-model sense. The third consists of language-model and prompting-based approaches that treat MTSC as a downstream adaptation target for a broader modelling framework.

5.5.1 Self-supervised pre-training and transferable representations. The earliest foundation-style use of the archive comes from representation learning rather than from MTSC-specific classifier design. **USRL** [37] is an early example, learning transferable time-series embeddings with a causal dilated encoder and triplet-style objectives [58]. This perspective becomes clearer in **TST** [157], which introduces a transformer encoder trained with masked self-supervision and then fine-tuned on downstream tasks, and in **TARNet** [22], which combines reconstruction and prediction through task-aware masking. **TS2Vec** [156] extends this approach through hierarchical contrastive learning across temporal granularities, making reuse across tasks central to the method. Later work broadens the same idea. **FEAT** [67] develops feature-aware self-supervised learning, **Series2Vec** [34] provides another reusable similarity-based representation learner, **HSC-MAE** [152] applies masked autoencoding through a hierarchical sparse-convolutional encoder, and **TimesURL** [84] explicitly targets universal representation learning through contrastive objectives and time-series-specific augmentations. What characterised these papers is both the use of self-supervision and the assumption that useful representations can be learned once and then adapted across multiple downstream settings.

5.5.2 Task-general backbones and transfer-oriented architectures. A second strand shifts the emphasis from reusable representations to reusable backbones. **TimesNet** [134] is the clearest early example, presenting a general architecture for multiple time-series problems through a 2D multi-period representation rather than as an MTSC-specific classifier. **LPTM** [63] makes the transfer perspective more explicit by studying cross-domain and cross-task adaptation from a large pre-trained time-series model. **ModernTCN** [88] is included here for the same reason: although convolutional internally, it is introduced as a general-purpose time-series backbone rather than as a classifier tailored to MTSC. In 2025 this branch expands further. **CBD** [46] revisits masked modelling through spectrum-aware masking, **PETS** [90] presents pattern-assisted multi-task analysis, **TFAS** [124] studies architecture search for foundation-style time-series

modelling, and **TSFM Adapters** [52] focuses on lightweight adaptation of existing foundation models. Across these papers, MTSC is no longer the sole target problem, but one evaluation setting among several for architectures intended to be broadly reusable.

5.5.3 Language-model and prompting-based adaptation. A third strand connects MTSC to the growing literature on language-model reasoning, prompting, and reprogramming. **LSTST** [60] is an early example, framing time-series classification through language-style prompting and reprogramming. In 2025 this perspective becomes much more prominent. **CauLLM** [136], **LETS-C** [66], **LLMFew** [18], and **S2TS-LLM** [110] differ in implementation, but all share the claim that MTSC can be reformulated to suit prompting, language-model-based inference, or few-shot adaptation. **TableTime** [126] fits naturally within this group: rather than proposing a new time-series backbone, it recasts temporal data into a tabular form suitable for in-context learning with a pre-trained general-purpose model. **HiTime** [122] extends this direction into multimodal LLM-style classification. These papers are foundation-style not because they are language-based per se, but because they treat MTSC as a downstream adaptation target for a broader modelling paradigm.

These papers show a change in how the UEA archive is used over time. Rather than serving only as a benchmark for bespoke MTSC classifiers, it increasingly serves as a transfer target for reusable time-series representations, task-general backbones, and language-time adaptation strategies.

Sixteen of the 21 foundation-style papers had explicit links to source code. Two used fewer than 10 UEA datasets, and nine evaluated on the same 10 UEA datasets first used by Zerveas et al. [157]. The number of baselines varies from 5 to 27 and there are roughly 60-65 distinct baseline algorithms across these papers. These include ED/DTW variants, **ROCKET** and **MiniRocket**, **TapNet**, **ShapeNet**, and **TST**, alongside newer self-supervised, backbone, and LLM-oriented comparators such as **TS2Vec**, **TS-TCC**, **TARNet**, **GPT4TS**, **TimesNet**, **ModernTCN**, **PatchTST**, and **Time-LLM**. The nine papers using the same 10 UEA datasets all compare more algorithms than they have datasets, which makes reliable significance testing difficult because of multiple testing. Seven foundation-style papers used 25 or more of the archive: **TARNet**, **TS2Vec**, **FEAT**, **LPTM**, **Series2Vec**, **TimesURL**, and **LETS-C**. There is no code repository for **LETS-C** or **FEAT**. **LPTM** does not link to code in the paper, although there is a GitHub repository associated with the model; however, that repository is focused on forecasting and provides no classification example. **TARNet** uses the test data for model selection. **Series2Vec** reports only archive-level results. Of the methods with broad archive coverage, only **TS2Vec** and **TimesURL** are directly comparable through available code. A scatter plot of the accuracy of these two classifiers is shown in Figure 11. **TimesURL** reports higher accuracy than **TS2Vec** on 22 of the 26 equal-length datasets and 24 out of the 30.

5.6 Other deep learners

This residual category contains deep models that do not sit naturally within the convolutional, transformer, graph, or foundation-style groups. The distinction is based on the main purpose of the paper rather than on the presence of any single component. Papers are placed here when they primarily propose a classifier tailored to MTSC itself, even if they borrow ideas such as self-supervision, contrastive learning, state-space sequence modelling, or hybrid architectural blocks. By contrast, papers whose central contribution is a reusable pre-trained representation, a task-general backbone, or a language-model-based adaptation strategy are grouped in the foundation-style section.

5.6.1 Recurrent and memory-based models. Pure recurrent architectures were important in early deep learning for univariate TSC, but they are relatively uncommon in the MTSC literature, where recurrence is more often absorbed into

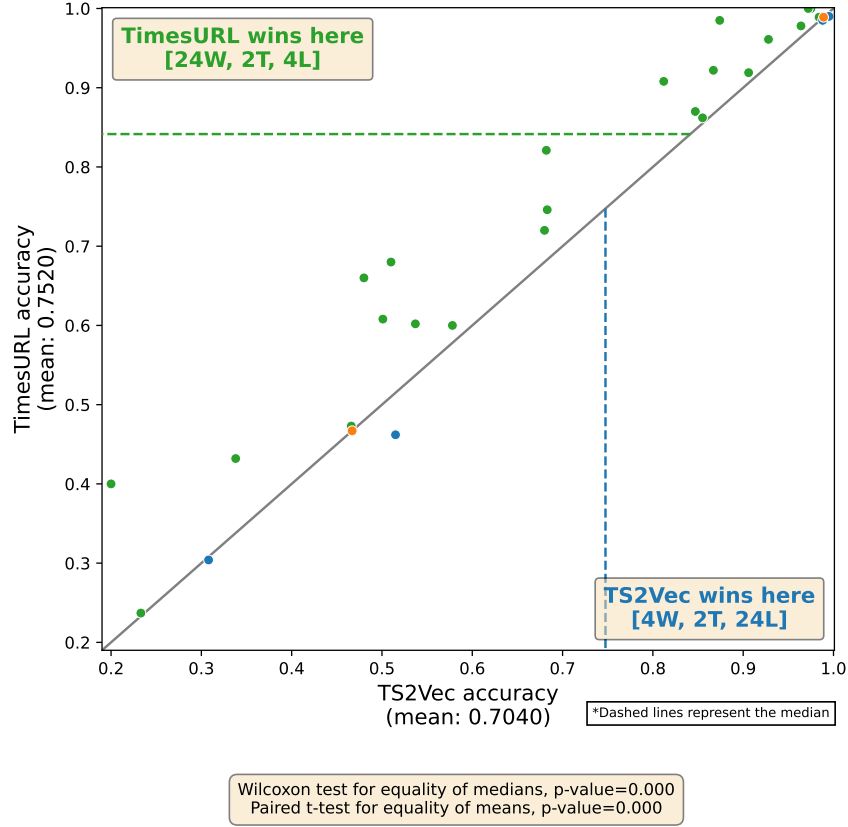


Fig. 11. A scatter plot of test set accuracies of TimesURL vs TS2Vec.

broader hybrid models. The few papers that remain clearly recurrent under our priority rule focus on making temporal memory more expressive for multivariate dependence. **SMATE** [170] combines GRU-based temporal encoding with a spatial interaction module and semi-supervised regularisation before applying an SVM in the learned embedding space. **mGRN** [166] stays closer to the recurrent tradition, introducing marginal and joint memory gates to separate variable-specific from cross-variable dependence. **RTFN** [144] also belongs in this line, combining temporal feature extraction with mechanisms that relate representations across time and variables. As a group, these models look less like a sustained modern stream and more like a transitional stage between early sequence modelling and later hybrid deep architectures.

5.6.2 Deep shapelet and interpretable symbolic models. A second strand adapts classical MTSC ideas, especially shapelets, to end-to-end neural pipelines. **ShapeNet** [74] retains a shapelet-centred view while making shapelet discovery differentiable and discriminative. **GMSM_red** [91] similarly learns multivariate shapelets as neural parameters. More recently, **VQShape** [132] abstracts local patterns into token-like units, linking shape-based reasoning to interpretability and transfer. These papers are important because they show that some of the most persistent ideas in MTSC remain shape-centred, even when implemented through modern neural optimisation.

5.6.3 MTSC-specific representation learning. Several papers use self-supervised or contrastive objectives, but remain best understood as bespoke MTSC classifiers rather than as reusable foundation-style models. **GP-HLS** [148] and **LBP4MTS** [149] are early examples of this shift, combining representation learning with classification-oriented design choices. The same is true of **DSDCLNet** [85], **RankSCL** [113], and **RTF** [154], which strengthen contrastive learning through dual-stream, rank-aware, or time-frequency-based mechanisms. **RFACL** [80], **NI-MTSC** [146] continue this direction through frequency-aware learning, augmentation, and uncertainty-aware contrastive objectives. What connects these algorithms is that the learned representation is still developed primarily in service of the MTSC classifier itself, rather than as a task-general backbone intended for broad downstream reuse.

5.6.4 State-space, continuous-time, and mixer-style sequence models. A more recent thread draws on generic sequence-modelling modules that have become prominent elsewhere in machine learning. **Chimera** [12] brings state-space modelling into the archive literature, while **Deep Efficient Continuous Manifold Learning** [61] combines continuous-time modelling with manifold geometry. **TSCMamba** [3] makes the connection to Mamba-style sequence models explicit, and later papers such as **MatrixMixer** [6] and **WaveState** [75] continue this trend through mixer-style and selective state-space designs. These methods are not foundation-style in our taxonomy because they are still introduced as MTSC classifiers rather than as broadly reusable pre-trained models.

5.6.5 Hybrid architectures and specialised designs. The largest part of this category consists of papers that combine multiple design ideas without fitting neatly into a single architectural family. **STSP-SNN** [30] explores spiking neural computation. **DSC** [168] links MTSC to federated semantic communication, while **WHEN** [127] combines wavelet- and DTW-inspired mechanisms to address non-stationarity and asynchrony. The 2024 literature is particularly diverse. **AGDM** [24] uses adaptive granularity and dimension decoupling, **DKN** [143] introduces densely knowledge-aware modelling, **FDNet** [38] fuses direct features and difference encodings, **MTSFNet** [51] merges temporal and spectral views, and **TSec** [147] focuses on efficient classification. In 2025 this heterogeneity continues. **DAPNet** [39] dynamically parses temporal and cross-variable structure, **FreRA** [123], **SFC** [16], and **TCFNet** [78] all fuse decomposed or frequency-aware views, **GrowingNN** [118] explores adaptive network growth, and **LETO** [11] and **MPTSNet** [99] contribute further hybrid architectures. This grouping is useful because it captures the most experimental and MTSC-specific parts of the design space, even though its members do not form a particularly coherent conceptual family.

Overall, these papers show that a large share of deep MTSC research still consists of bespoke classifier design. Even when such models adopt self-supervised, contrastive, or state-space components, their central goal remains to improve MTSC directly rather than to build a representation or backbone intended for broad downstream transfer.

Thirteen of the 33 other deep papers had explicit links to source code. Five used fewer than 10 UEA datasets, and 15 used 25 or more of the archive. Eleven evaluated on all 30 UEA datasets. The number of baselines varies from 2 to 21 and there are around 100-110 distinct baseline algorithms across these papers. These include ED/DTW variants, WEASEL+MUSE, TSF, ROCKET and MiniRocket, TapNet, ShapeNet, and MLSTM-FCN, alongside newer deep, self-supervised, and task-general comparators such as TST, TS2Vec, TS-TCC, TNC, MICOS, TimesNet, Autoformer, Flowformer, PatchTST, ConvTran, and ModernTCN. The category is architecturally heterogeneous and is compared against an unusually broad range of baselines, including methods from classical MTSC, deep MTSC, self-supervised representation learning, and general-purpose time-series modelling.

Of the 15 papers that evaluated on 25 or more UEA datasets, 11 have code links or obvious GitHub repositories. Three show clear evidence of test-set model selection or hyperparameter tuning (DECM, VQShape, and MPTSNet), and two use fixed data-dependent settings or custom resplitting logic (SMATE and FreRA). The ShapeNet code is released

as a single zip file rather than as a GitHub repository, and it normalises data using the combined train and test sets. The RTF paper links to code that is no longer available. TSec does not present a per-dataset results table, and such results are not available in the repository. MatrixMixer links to a GitHub repository that currently returns a 404 error. The only paper with no obvious problems in the exposed entry-point code that also provides usable results is RankSCL, which reports results averaged over five different seeds.

6 Published results and the limits of cross-paper comparison

The previous sections reviewed how the UEA MTSC archive has been used, and how the main families of MTSC models developed. 43 of the surveyed papers make some claim to be state-of-the-art in the abstract, including 25 in 2025 alone. The question is whether the published results support this clear story of progress. At present, only a qualified answer is possible. The literature is now large enough that broad trends can be discussed, but the evidence is not yet standardised enough to support a formal meta-analysis across all surveyed papers.

The main difficulty is that the published results do not sit on a single common benchmark. Our survey has shown that comparing published results and reproducing experiments is difficult. Limited code availability, variation in experimental design, sub-selection of datasets and leakage from test to train are all commonplace. In addition, many recent papers position themselves against a subset of comparators rather than against a stable common benchmark collection. As a result, the problem is a lack of directly comparable numbers. For that reason, this section should be read as a cautious synthesis of the strongest currently available evidence rather than as a definitive ranking of MTSC methods.

Even with that caution, three broad points already emerge from the literature. First, the UEA MTSC archive clearly supported rapid methodological progress in the sense that later papers compare against a much stronger baseline canon than earlier ones. The benchmark shifted from comparisons against simple distance and feature-based methods towards comparisons against well-engineered CNNs, transformer models, and self-supervised or backbone-style approaches.

Our aim is to compare published results fairly. Our requirement for useful comparison is that all 26 equal length datasets were used with the default train/test split, source code is available with no obvious leakage from test to train and the results are available either in the paper or the associated repository. We found that 13 of the 142 papers surveyed satisfied these criteria: five machine-learning (CMFM [10], RT [9], BORF [117], HC2 [95] and CIF [94]), three convolutional (LITEMVTime [57], Disjoint-CNN [36] and XCM [31]), two transformer-based (ConvTran [35] and PatchMTSC [131]), two foundation-style (TS2Vec [156] and TimesURL [84]) and one in the other category (RankSCL [113]). The published results of these algorithms are presented in Table 3 and summarised in Figures 12 and 13. The results for the excluded ML estimators are in the Appendix Table 4.

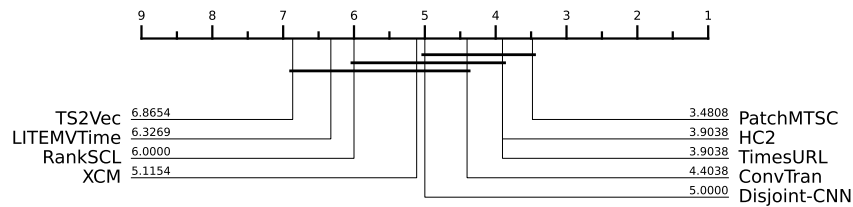


Fig. 12. A comparison of ranks of nine classifiers on 26 equal length datasets.

Table 3. Accuracy of nine classifiers on 26 UEA datasets. The best score in each row is shown in bold.

Dataset	HC2	Disjoint-CNN	XCM	LITEMVTime	ConvTran	PatchMTSC	TimesURL	TS2Vec	RankSCL
ArticularyWordRecognition	0.993	0.984	0.983	0.973	0.983	0.993	0.990	0.987	0.977
AtrialFibrillation	0.267	0.375	0.467	0.133	0.400	0.533	0.400	0.200	0.293
BasicMotions	1.000	1.000	1.000	1.000	1.000	1.000	1.000	0.975	1.000
Cricket	1.000	0.999	1.000	0.986	1.000	1.000	1.000	0.972	0.986
DuckDuckGeese	0.560	0.644	0.700	0.180	0.620	0.570	0.720	0.680	0.604
ERing	0.989	0.964	0.133	0.844	0.963	0.951	0.985	0.874	0.913
EigenWorms	0.947	0.593	0.435	0.939	0.593	0.557	0.870	0.847	0.727
Epilepsy	1.000	0.989	0.993	0.993	0.986	0.985	0.978	0.964	0.975
EthanolConcentration	0.772	0.309	0.346	0.692	0.361	0.623	0.304	0.308	0.304
FaceDetection	0.660	0.567	0.639	0.610	0.672	0.680	0.608	0.501	0.637
FingerMovements	0.530	0.604	0.600	0.560	0.560	0.614	0.660	0.480	0.528
HandMovementDirection	0.473	0.324	0.446	0.351	0.405	0.662	0.432	0.338	0.322
Handwriting	0.548	0.321	0.412	0.400	0.375	0.438	0.462	0.515	0.566
Heartbeat	0.732	0.759	0.776	0.615	0.785	0.785	0.746	0.683	0.740
LSST	0.643	0.547	0.612	0.664	0.616	0.668	0.602	0.537	0.164
Libras	0.933	0.916	0.844	0.894	0.928	0.888	0.922	0.867	0.914
MotorImagery	0.540	0.569	0.540	0.530	0.560	0.600	0.680	0.510	0.550
NATOPS	0.894	0.967	0.978	0.900	0.944	0.950	0.961	0.928	0.927
PEMS-SF	1.000	0.817	0.757	0.792	0.828	0.804	0.821	0.682	0.881
PenDigits	0.979	0.995	0.991	0.989	0.987	0.993	0.989	0.986	0.986
PhonemeSpectra	0.290	0.282	0.225	0.158	0.306	0.261	0.237	0.233	0.271
RacketSports	0.908	0.846	0.895	0.737	0.862	0.888	0.862	0.855	0.881
SelfRegulationSCP1	0.891	0.903	0.878	0.730	0.918	0.904	0.908	0.812	0.862
SelfRegulationSCP2	0.500	0.538	0.544	0.550	0.583	0.611	0.600	0.578	0.549
StandWalkJump	0.467	0.436	0.400	0.667	0.333	0.600	0.467	0.467	0.533
UWaveGestureLibrary	0.928	0.924	0.894	0.847	0.891	0.903	0.919	0.906	0.873
Wins	10	2	3	2	5	9	5	0	2
Average	0.748	0.699	0.673	0.682	0.710	0.749	0.735	0.680	0.691
Mean Rank	3.904	5.000	5.115	6.327	4.404	3.481	3.904	6.865	6.000

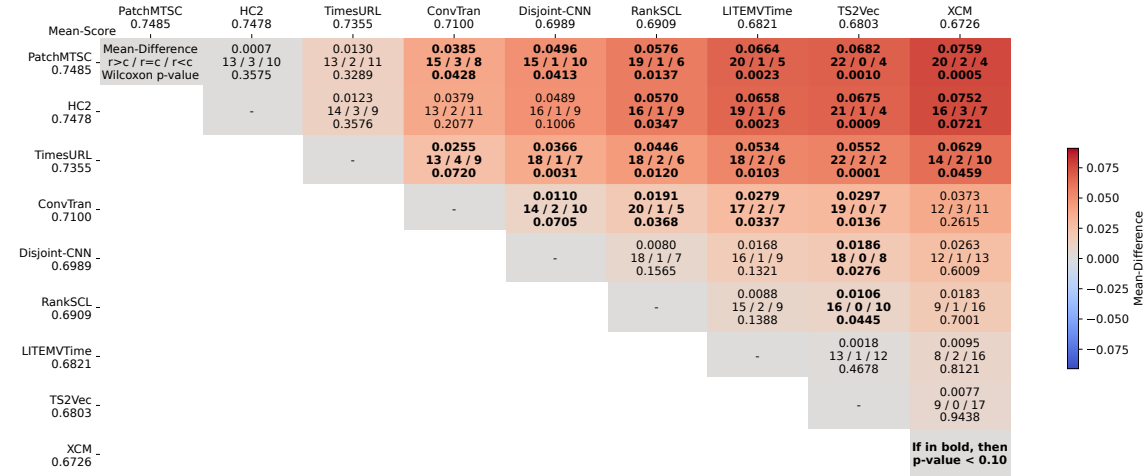


Fig. 13. A Multi-Comparison Matrix (MCM) [55] of relative performances of nine classifiers on 26 equal length datasets.

PatchMTSC is the highest ranked classifier but it is not significantly better than HC2, TimesURL, ConvTran and Disjoint-CNN. However, the main conclusion to be drawn is that there is not much evidence to separate the classifiers at all: three cliques cover all nine algorithms. This is due to three factors: firstly, when correcting for multiple testing it is hard to detect differences with just 26 datasets. Secondly, all these results are on a single train/test split rather than

repeated resamples. Given that some of the datasets are very small, this increases the chance of observing different accuracies based purely on chance. Thirdly, datasets such as BasicMotions and Cricket are trivial, and if nearly all algorithms achieve a perfect score this reduces the power of the test. These results emphasise the need for a better benchmark of MTSC datasets and a more rigorous experimental regime.

The published results do not currently support the view that one model family dominates the archive across the board. The top clique contains classifiers from different families, including classical ensembles, convolutional models, transformer-based methods, and foundation-style approaches. At the same time, the recurring reliance on different dataset subsets means that many apparent gains are established only on particular slices of the archive rather than on a common benchmark as a whole. One implication of this analysis is the need for broader and more clearly curated benchmark resources. In response to these issues, we have released the Multiverse archive [96], which extends the UEA collection with more diverse datasets and a defined practical comparison subset of 66 datasets, the Multiverse-core. Together with a public repository⁵ and standard scikit-learn-compatible tooling through *aeon* [93], this is intended to support more transparent and reproducible comparison in future MTSC research.

7 Conclusions

The history of the UEA MTSC archive since 2018 shows both the strengths and the limits of a successful benchmark. The archive clearly helped create a coherent MTSC literature. It gave researchers a common evaluation target, made comparison easier across otherwise disconnected modelling communities, and supported a rapid expansion from classical methods to transformers, graph models, self-supervised learning, and foundation-style backbones.

At the same time, the literature also shows that a shared dataset collection is not enough on its own. Papers often use different subsets of the archive, compare against different baseline canons, and adopt different evaluation regimes. That does not make the literature uninformative, but it does make claims of progress less secure than they sometimes appear. The lesson is not that benchmark-driven research is misguided, but that benchmark curation and evaluation protocol have to be treated as part of the research infrastructure.

Two practical conclusions follow. First, future MTSC papers should report more clearly which datasets are used, why particular subsets were chosen, how unequal-length problems were handled, whether baselines were rerun under the same protocol, and where source code can be found. Second, benchmark infrastructure needs to improve at both the software and the data levels. *aeon* provides a common software layer for implementation, evaluation, and rerunning baselines under consistent protocols. Multiverse and its associated repository aim to improve the data layer, with broader coverage, better metadata, and clearer task curation. Together they offer a route beyond the partial standardisation achieved by the UEA MTSC archive alone.

The analysis in this paper has three main limitations. First, the corpus is benchmark-linked rather than exhaustive: papers were discovered through citation of the UEA MTSC archive papers, so relevant non-citing papers may be absent. Second, the single-label taxonomy is intentionally simple and therefore ignores some hybrid design choices. Third, the data on these papers was aggregated manually and may contain errors. These limitations do not invalidate the broad patterns reported here, but they do mean that fine-grained quantitative claims should be treated cautiously.

The value of this survey lies in documenting a decade of MTSC algorithm design and in making explicit what the field should preserve, and what it should correct, as it moves to the next generation of benchmarks.

⁵<https://github.com/aeon-toolkit/multiverse/survey>

References

- [1] Mehryar Abbasi and Parvaneh Saeedi. 2024. Enhancing Multivariate Time Series Classifiers Through Self-Attention and Relative Positioning Infusion. *IEEE Access* (2024). doi:10.1109/ACCESS.2024.3397783
- [2] Javidan Abdullayev, Maxime Devanne, Cyril Meyer, Ali Ismail-Fawaz, Jonathan Weber, and Germain Forestier. 2025. Enhancing Time Series Classification with Diversity-Driven Neural Network Ensembles. In *2025 International Joint Conference on Neural Networks (IJCNN)*. IEEE, 1–10.
- [3] Md Atik Ahamed and Qiang Cheng. 2025. TSCMamba: Mamba meets multi-view learning for time series classification. *Information Fusion* 120 (2025), 103079. doi:10.1016/j.inffus.2025.103079
- [4] Önder Akacik and Mark Hoogendoorn. 2025. ModernTCN Revisited: A Critical Look at the Experimental Setup in General Time Series Analysis. *Transactions on Machine Learning Research* (2025). <https://openreview.net/forum?id=R20kKdWmVZ>
- [5] Marcello Anacleto, Marco Fazzolari, and Domenico Talia. 2020. MSAX: Multivariate Symbolic Aggregate approXimation. In *Computational Intelligence Methods for Bioinformatics and Biostatistics*. Lecture Notes in Bioinformatics, Vol. 12313. Springer Nature Switzerland AG, 90–97. doi:10.1007/978-3-030-63061-4_9
- [6] Mohammad Mahdi Azizi and Bagher BabaAli. 2026. Matrix mixer analysis for time series classification: Attention on tokenization. *Information Fusion* 129 (2026), 104009. doi:10.1016/j.inffus.2025.104009
- [7] A. Bagnall, H. Dau, J. Lines, M. Flynn, J. Large, A. Bostrom, P. Southam, and E. Keogh. 2018. The UEA multivariate time series classification archive, 2018. *ArXiv e-prints* arXiv:1811.00075 (2018). <https://arxiv.org/abs/1811.00075>
- [8] A. Bagnall, J. Lines, A. Bostrom, J. Large, and E. Keogh. 2017. The great time series classification bake off: a review and experimental evaluation of recent algorithmic advances. *Data Mining and Knowledge Discovery* 31, 3 (2017), 606–660.
- [9] Omar Bahri, Peiyu Li, Soukaina Filali Boubrahimi, and Shah Muhammad Hamdi. 2022. Shapelet-based Temporal Association Rule Mining for Multivariate Time Series Classification. In *International Conference on Big Data*. IEEE. doi:10.1109/BigData55660.2022.10020478
- [10] Francisco J. Baldán and José M. Benítez. 2021. Multivariate time series classification through an interpretable representation. *Information Sciences* 569 (2021), 596–614. doi:10.1016/j.ins.2021.05.024
- [11] Ali Behrouz, Daniel Yiming Cao, Ali Parviz, Michele Santacatterina, and Ramin Zabih. 2025. LETO: Modeling Multivariate Time Series with Memorizing at Test Time. In *Second Workshop on Test-Time Adaptation at ICML 2025*.
- [12] Ali Behrouz, Michele Santacatterina, and Ramin Zabih. 2024. Chimera: Effectively modeling multivariate time series with 2-dimensional state space models. 119886–119918 pages.
- [13] Paul Boniol, Mohammed Charaf Meftah, Emmanuel Remy, and Themis Palpanas. 2022. dCAM: Dimension-wise Class Activation Map for Explaining Multivariate Data Series Classification. In *ACM International Conference on Management of Data*. ACM. doi:10.1145/3514221.3526183
- [14] Andrea Campagner, Marília Barandas, Duarte Folgado, Hugo Gamboa, and Federico Cabitza. 2024. Ensemble Predictors: Possibilistic Combination of Conformal Predictors for Multivariate Time Series Classification. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 46, 11 (2024), 7205–7216. doi:10.1109/TPAMI.2024.3388097
- [15] Nicole A Capela, Edward D Lemaire, and Natalie Baddour. 2015. Improving classification of sit, stand, and lie in a smartphone human activity recognition system. In *2015 IEEE International Symposium on Medical Measurements and Applications (MeMeA) Proceedings*. IEEE, 473–478.
- [16] Haoyu Chen, Bo Li, Zhiyong An, Yuan Yu, and Ying Jia. 2025. SFC: a time series decomposition attention network with continuous nature for time series analysis. *Data Mining and Knowledge Discovery* (2025). doi:10.1007/s10618-025-01121-7
- [17] Rongjun Chen, Xuanhui Yan, Shiping Wang, and Guobao Xiao. 2022. DA-Net: Dual-attention network for multivariate time series classification. *Information Sciences* 610 (2022), 472–487. doi:10.1016/j.ins.2022.07.178
- [18] Yakun Chen, Zihao Li, Chao Yang, Xinyue Wang, and Guandong Xu. 2025. Large language models are few-shot multivariate time series classifiers. *Data Mining and Knowledge Discovery* 39 (2025), 66. doi:10.1007/s10618-025-01145-z
- [19] Yingyi Chen, Qinghua Tao, Francesco Tonin, and Johan A. K. Suykens. 2023. Primal-Attention: Self-attention through Asymmetric Kernel SVD in Primal Representation. In *Advances in Neural Information Processing Systems*. <https://github.com/yingyichen-cyy/PrimalAttention>
- [20] Mingyue Cheng, Qi Liu, Zhiding Liu, Zhi Li, Yucong Luo, and Enhong Chen. 2023. FormerTime: Hierarchical Multi-Scale Representations for Multivariate Time Series Classification. In *ACM Web Conference*. doi:10.1145/3543507.3583205
- [21] Xu Cheng, Peihua Han, Guoyuan Li, Shengyong Chen, and Houxiang Zhang. 2020. A Novel Channel and Temporal-Wise Attention in Convolutional Networks for Multivariate Time Series Classification. *IEEE Access* 8 (2020), 212247–212257. doi:10.1109/ACCESS.2020.3040515
- [22] Ranak Roy Chowdhury, Xiyuan Zhang, Jingbo Shang, Rajesh K. Gupta, and Dezhi Hong. 2022. TARNet: Task-Aware Reconstruction for Time-Series Transformer. In *ACM Conference on Knowledge Discovery and Data Mining*. ACM. doi:10.1145/3534678.3539329
- [23] H. Dau, A. Bagnall, K. Kamgar, M. Yeh, Y. Zhu, S. Gharghabi, and C. Ratanamahatana. 2018. The UCR Time Series Archive. *arXiv preprint arXiv:1810.07758* (2018).
- [24] Guohui Ding, Shizhan Geng, Qingyang Jiao, and Tianhao Jiang. 2024. AGDM: Adaptive Granularity and Dimension Decoupling for Multidimensional Time Series Classification. In *International Conference on Intelligent Computing (Lecture Notes in Computer Science, Vol. 14874)*. Springer, 405–416. doi:10.1007/978-981-97-5618-6_34
- [25] Mingsen Du and Meng Chen. 2025. Multivariate Time Series Classification via Heterogeneous Graph Representation. *IEEE Transactions on Industrial Informatics* (2025). doi:10.1109/TII.2025.3598519

- [26] Mingsen Du, Yanxuan Wei, Xiangwei Zheng, and Cun Ji. 2023. Multi-feature based network for multivariate time series classification. *Information Sciences* 639 (2023), 119009. doi:10.1016/j.ins.2023.119009
- [27] Yanling Du, Shuhao Chu, Jintao Wang, Manli Shi, Dongmei Huang, and Wei Song. 2025. MD-Former: Multiscale Dual Branch Transformer for Multivariate Time Series Classification. *Sensors* 25, 5 (2025), 1487. doi:10.3390/s25051487
- [28] Ziheng Duan, Haoyan Xu, Yueyang Wang, Yida Huang, Anni Ren, Zhongbin Xu, Yizhou Sun, and Wei Wang. 2022. Multivariate time-series classification with hierarchical variational graph pooling. *Neural Networks* 154 (2022), 481–490. doi:10.1016/j.neunet.2022.07.032
- [29] Andrea Falanti, Eugenio Lomurno, Danilo Ardagna, and Matteo Matteucci. 2023. POPNASv3: A pareto-optimal neural architecture search solution for image and time series classification. *Applied Soft Computing* 145 (2023), 110555. doi:10.1016/j.asoc.2023.110555
- [30] Qilong Fang, Doudou Zhao, Hanyang Wang, Lu Yu, Ruidong Yan, Wei Cheng, and Xin Chen. 2020. Spatial-Temporal Spike Pattern Based Classification for Multivariate Time Series Data. In *International Joint Conference on Neural Networks*. IEEE.
- [31] Kevin Fauvel, Tao Lin, Véronique Masson, Élisabeth Fromont, and Alexandre Termier. 2021. XCM: An Explainable Convolutional Neural Network for Multivariate Time Series Classification. *Mathematics* 9 (2021), 3137. doi:10.3390/math9233137
- [32] H. Fawaz, B. Lucas, G. Forestier, C. Pelletier, D. Schmidt, J. Weber, G. Webb, L. Idoumghar, P. Muller, and F. Petitjean. 2020. InceptionTime: finding AlexNet for time series classification. *Data Mining and Knowledge Discovery* 34, 6 (2020), 1936–1962.
- [33] Len Feremans, Boris Cule, and Bart Goethals. 2022. PETSC: pattern-based embedding for time series classification. *Data Mining and Knowledge Discovery* 36 (2022), 1015–1061. doi:10.1007/s10618-022-00822-7
- [34] Navid Mohammadi Foumani, Chang Wei Tan, Geoffrey I. Webb, and Hamid Reza Tofighi. 2024. Series2vec: similarity-based self-supervised representation learning for time series classification. *Data Mining and Knowledge Discovery* 38 (2024), 2520–2544. doi:10.1007/s10618-024-01043-w
- [35] Navid Mohammadi Foumani, Chang Wei Tan, Geoffrey I. Webb, and Mahsa Salehi. 2024. Improving position encoding of transformers for multivariate time series classification. *Data Mining and Knowledge Discovery* 38 (2024), 22–48. doi:10.1007/s10618-023-00948-2
- [36] Seyed Navid Foumani, Chang Wei Tan, and Mahsa Salehi. 2021. Disjoint-CNN for Multivariate Time Series Classification. In *International Conference on Data Mining Workshops*. IEEE, 760–769. doi:10.1109/ICDMW53433.2021.00099
- [37] Jean-Yves Franceschi, Aymeric Dieuleveut, and Martin Jaggi. 2019. Unsupervised Scalable Representation Learning for Multivariate Time Series. In *Conference on Neural Information Processing Systems*. Vancouver, Canada.
- [38] Fei Gao, Luofeng Zhang, and Yuanming Zhang. 2024. FNet: A Novel Multivariate Time Series Classification Model Through Fusing Feature and Difference. In *International Conference on Multimedia and Expo*. 5177–5182. doi:10.1109/ICME57554.2024.10688243
- [39] Yuan Gao. 2025. Dynamic adaptive parsing of temporal and cross-variable patterns for network state classification. *Expert Systems with Applications* 305 (2025), 130893. doi:10.1016/j.eswa.2025.130893
- [40] Wenwei Gu. 2024. RTNet: Relational-Temporal Classification Network for Multivariate Time Series. In *Proceedings of SPIE*, Vol. 13225. 132250F. doi:10.1117/12.3046180
- [41] Yongli Gu. 2025. HDTCNet: A hybrid-dimensional convolutional network for multivariate time series classification. *Pattern Recognition* 168 (2025), 111837. doi:10.1016/j.patcog.2025.111837
- [42] Yan Gu. 2025. A hybrid lightweight transformer architecture based on fuzzy attention prototypes for multivariate time series classification. *Information Sciences* 703 (2025), 121942. doi:10.1016/j.ins.2025.121942
- [43] Haoyu Gui. 2025. A novel dynamic graph attention aggregation network for multivariate time series classification. *Pattern Recognition* 172 (2025), 112732. doi:10.1016/j.patcog.2025.112732
- [44] Haoyu Gui, Guanjun Li, Xianghong Tang, and Janguang Lu. 2024. CATodyNet: Cross-attention Temporal Dynamic Graph Neural Network for Multivariate Time Series Classification. *Knowledge-Based Systems* 300 (2024), 112210. doi:10.1016/j.knosys.2024.112210
- [45] Amine Haboub, Hamza Baali, and Abdesselam Bouzerdoum. 2025. DCT-Based Channel Attention for Multivariate Time Series Classification. *IEEE Open Journal of the Computer Society* 6 (2025), 72–84. doi:10.1109/OJCS.2025.3586682
- [46] Yudong Han, Haocong Wang, Yupeng Hu, Yongshun Gong, Xueming Song, and Weili Guan. 2025. Content-Aware Balanced Spectrum Encoding in Masked Modeling for Time Series Classification. In *AAAI Conference on Artificial Intelligence*.
- [47] Yifan Hao and Huiping Cao. 2020. A New Attention Mechanism to Classify Multivariate Time Series. In *International Joint Conference on Artificial Intelligence*. doi:10.5555/3491440.3491717
- [48] Changchun He, Xin Huo, Chao Zhu, and Songlin Chen. 2024. Feature Selection-Based Multiview Concentration for Multivariate Time Series Classification and Its Application. *IEEE Sensors Journal* 24, 4 (2024).
- [49] Xiaobin Hong, Jiangyi Hu, Taishan Xu, Xiancheng Ren, Feng Wu, and Xiangkai Ma. 2024. MagNet: Multilevel Dynamic Wavelet Graph Neural Network for Multivariate Time Series Classification. *ACM Transactions on Knowledge Discovery from Data* 19, 1 (2024), 19. doi:10.1145/3703915
- [50] Lin Huang, Jinghua Yan, Wei Zhang, and Yuchao Lu. 2026. TFTN: A Time-Frequency Integrated Transformer Network with Multi-scale Feature Extraction for Time Series Classification. In *International Conference on Neural Information Processing (Lecture Notes in Computer Science, Vol. 16312)*. Springer Nature Singapore, 356–369.
- [51] Xulin Huang, Shizhe Ding, Xinru Zhang, Jingyan Sui, Yue Yu, and Dongbo Bu. 2024. Multilevel Temporal-Spectral Fusion Network for Multivariate Time Series Classification. In *International Joint Conference on Neural Networks*. IEEE. doi:10.1109/IJCNN60899.2024.10651080
- [52] Romain Ilbert, Vasilii Feofanov, Malik Tiomoko, Ievgen Redko, and Themis Palpanas. 2025. User-friendly Foundation Model Adapters for Multivariate Time Series Classification. In *International Conference on Data Engineering Workshops*. doi:10.1109/ICDEW67478.2025.00024

- [53] Josu Ircio, Aizea Lojo, Usue Mori, and Jose A. Lozano. 2020. Mutual information based feature subset selection in multivariate time series classification. *Pattern Recognition* 108 (2020), 107525. doi:10.1016/j.patcog.2020.107525
- [54] Ali Ismail-Fawaz. 2025. Deep Learning For Time Series Analysis With Application On Human Motion. *arXiv preprint arXiv:2502.19364* (2025).
- [55] Ali Ismail-Fawaz, Angus Dempster, Chang Wei Tan, Matthieu Herrmann, Lynn Miller, Daniel Schmidt, Stefano Berretti, Jonathan Weber, Maxime Devanne, Germain Forestier, and Geoffrey Webb. 2023. An Approach to Multiple Comparison Benchmark Evaluations that is Stable Under Manipulation of the Compare Set. *arXiv preprint arXiv:2305.11921* (2023).
- [56] Ali Ismail-Fawaz, Maxime Devanne, Stefano Berretti, Jonathan Weber, and Germain Forestier. 2025. Deep Learning for Skeleton Based Human Motion Rehabilitation Assessment: A Benchmark. *arXiv preprint arXiv:2507.21018* (2025). arXiv:2507.21018 [cs.CV] doi:10.48550/arXiv.2507.21018
- [57] Ali Ismail-Fawaz, Maxime Devanne, Stefano Berretti, Jonathan Weber, and Germain Forestier. 2025. Look into the LITE in deep learning for time series classification. *International Journal of Data Science and Analytics* 20 (2025), 4029–4049. doi:10.1007/s41060-024-00708-5
- [58] Ali Ismail-Fawaz, Maxime Devanne, Jonathan Weber, and Germain Forestier. 2023. Enhancing time series classification with self-supervised learning. In *International Conference on Agents and Artificial Intelligence (ICAART)*. SCITEPRESS-Science and Technology Publications, 40–47.
- [59] Hassan Ismail Fawaz, Germain Forestier, Jonathan Weber, Lhassane Idoumghar, and Pierre-Alain Muller. 2019. Deep learning for time series classification: a review. *Data mining and knowledge discovery* 33, 4 (2019), 917–963.
- [60] Hyeonwon Jang, June Yong Yang, Jaeryong Hwang, and Eunho Yang. 2024. Time Series Classification With Large Language Models via Linguistic Scaffolding. *IEEE Access* 12 (2024). doi:10.1109/ACCESS.2024.3475471
- [61] Seungwoo Jeong, Wonjun Ko, Ahmad Wisnu Mulyadi, and Heung-Il Suk. 2024. Deep Efficient Continuous Manifold Learning for Time Series Modeling. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 46, 1 (2024). doi:10.1109/TPAMI.2023.3320125
- [62] Jianjian Jiang, Chuxin Zhuang, Fangyan Lei, Ziwei Chen, Lintao Xiao, Mingjing Liang, and Jianfeng Peng. 2025. A novel Mamba-hypergraph enhanced time-frequency fusion network for multivariate time series classification. *Complex & Intelligent Systems* 11, 380 (2025). doi:10.1007/s40747-025-02016-2
- [63] Harshavardhan Kamarthi and B. Aditya Prakash. 2024. Large Pre-trained Time Series Models for Cross-domain Time Series Analysis Tasks. In *Advances in Neural Information Processing Systems*.
- [64] Hyewon Kang, Taek-Ho Lee, and Junghye Lee. 2025. A graph convolutional network for time series classification using recurrence plots. *Applied Intelligence* 55, 15 (2025), 972. doi:10.1007/s10489-025-06841-3
- [65] Bahavathy Kathirgamanathan and Pádraig Cunningham. 2020. A Feature Selection Method for Multi-dimension Time-Series Data. In *Advanced Analytics and Learning on Temporal Data (Lecture Notes in Artificial Intelligence, Vol. 12588)*. Springer Nature Switzerland AG, 220–231. doi:10.1007/978-3-030-65742-0_15
- [66] Anagh Kaur, Mingjian Zeng, Tucker Balch, and Manuela Veloso. 2025. Large Language Models as Time Series Classifiers (LETS-C). In *Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, 32365–32399. <https://aclanthology.org/2025-acl-long.1557/>
- [67] Subin Kim, Euisuk Chung, and Pilsung Kang. 2023. FEAT: A general framework for feature-aware multivariate time-series representation learning. *Knowledge-Based Systems* 277 (2023), 110790. doi:10.1016/j.knosys.2023.110790
- [68] J. Large, J. Lines, and A. Bagnall. 2019. A probabilistic classifier ensemble weighting scheme based on cross validated accuracy estimates. *Data Mining and Knowledge Discovery* 33, 6 (2019), 1674–1709.
- [69] Xuan-May Le, Ling Luo, Uwe U. Aickelin, and Minh Tuan Tran. 2024. ShapeFormer: Shapelet Transformer for Multivariate Time Series Classification. In *ACM Conference on Knowledge Discovery and Data Mining*. doi:10.1145/3637528.3671862
- [70] Yann LeCun, Yoshua Bengio, and Geoffrey Hinton. 2015. Deep learning. *nature* 521, 7553 (2015), 436–444.
- [71] Zed Lee, Tony Lindgren, and Panagiotis Papapetrou. 2024. Z-Time: Efficient and effective interpretable multivariate time series classification. *Data Mining and Knowledge Discovery* 38 (2024), 206–236. doi:10.1007/s10618-023-00969-x
- [72] Tianyang Lei, Jichao Li, and Kewei Yang. 2024. Time and frequency-domain feature fusion network for multivariate time series classification. *Expert Systems with Applications* 252 (2024), 124155. doi:10.1016/j.eswa.2024.124155
- [73] Jordan Levy, Clément Blanco-Volle, Nicolas Verstaev, Benoit Gaudou, and Vincent Talon. 2026. TimeCIEL: Contextual Interactive Ensemble Learning for Time Series Classification. In *Practical Applications of Agents and Multi-Agent Systems (Lecture Notes in Computer Science, Vol. 16031)*. Springer, 316–327. doi:10.1007/978-3-032-07638-0_26
- [74] Guozhong Li, Byron Choi, Jianliang Xu, Sourav S. Bhowmick, Kwok-Pan Chun, and Grace Lai-Hung Wong. 2021. ShapeNet: A Shapelet-Neural Network Approach for Multivariate Time Series Classification. In *AAAI Conference on Artificial Intelligence*. AAAI Press, 8375–8383.
- [75] Long Li, Wanghu Chen, and Jing Li. 2026. WaveState: A parallel selective state-space attention model with class-adaptive time-frequency features for multivariate time series classification. *Knowledge-Based Systems* 333 (2026), 115014. doi:10.1016/j.knosys.2025.115014
- [76] Xianpeng Li, Ziyang Su, Yuliang Shi, Lin Cheng, Xinjun Wang, Zhiyong Chen, and Hui Li. 2025. MuPaST: Multi-Period Aware Spatio-Temporal Representation Learning for Multivariate Time Series Classification. In *Pacific-Asia Conference on Knowledge Discovery and Data Mining (Lecture Notes in Artificial Intelligence, Vol. 15873)*. Springer Nature Singapore, 143–153. doi:10.1007/978-981-96-8183-9_12
- [77] Zihan Li, Wei Ding, Inal Mashukov, Scott Crouter, and Ping Chen. 2024. A Multi-view Feature Construction and Multi-Encoder-Decoder Transformer Architecture for Time Series Classification. In *Pacific-Asia Conference on Knowledge Discovery and Data Mining (Lecture Notes in Artificial Intelligence, Vol. 14650)*. Springer Nature Singapore, 239–250. doi:10.1007/978-981-97-2266-2_19

- [78] Yixiu Liang, Xuan Liu, Chuanzhi Jia, and Heng Liu. 2025. TCFNet: Temporal-Correlated Feature Fused Network for Multivariate Time Series Classification. In *Computing and Combinatorics Conference (Lecture Notes in Computer Science, Vol. 15162)*. Springer, 252–264. doi:10.1007/978-981-97-4269-5_16
- [79] Zhiyu Liang, Zheng Liang, Hongzhi Wang, and Bo Zheng. 2025. FedDict: Towards Practical Federated Dictionary-Based Time Series Classification. *IEEE Transactions on Knowledge and Data Engineering* 37, 4 (2025), 1785–1803. doi:10.1109/TKDE.2025.3528023
- [80] Fangru Lin, Yuan Gao, Yuxin Chen, Jingyi Huo, and Hui Yan. 2025. Receptive Field Aware Contrastive Learning for Multivariate Time Series Classification. In *International Joint Conference on Neural Networks*. IEEE. doi:10.1109/IJCNN64981.2025.11228102
- [81] J. Lin, E. Keogh, L. Wei, and S. Lonardi. 2007. Experiencing SAX: a novel symbolic representation of time series. *Data Mining and Knowledge Discovery* 15, 2 (2007), 107–144.
- [82] Chen Liu, Juntao Zhen, and Wei Shan. 2023. Time series classification based on convolutional network with a Gated Linear Units kernel. *Engineering Applications of Artificial Intelligence* 123 (2023), 106296. doi:10.1016/j.engappai.2023.106296
- [83] Huaiyuan Liu, Donghua Yang, Xianzhang Liu, Xinglei Chen, Zhiyu Liang, Hongzhi Wang, Yong Cui, and Jun Gu. 2024. TodyNet: Temporal dynamic graph neural network for multivariate time series classification. *Information Sciences* 677 (2024), 120914. doi:10.1016/j.ins.2024.120914
- [84] Jiexi Liu and Songcan Chen. 2024. TimesURL: Self-Supervised Contrastive Learning for Universal Time Series Representation Learning. In *AAAI Conference on Artificial Intelligence*. 13918–13926.
- [85] Min Liu, Hui Sheng, Ningyi Zhang, Panpan Zhao, Yugen Yi, Yirui Jiang, and Jiangyan Dai. 2024. DSDCLNet: Dual-stream encoder and dual-level contrastive learning network for supervised multivariate time series classification. *Knowledge-Based Systems* 292 (2024), 111638. doi:10.1016/j.knosys.2024.111638
- [86] Xiao Liu, Yan Li, and Haishuai Wang. 2025. Unraveling Spatial-Temporal and Out-of-Distribution Patterns for Multivariate Time Series Classification. In *Companion Proceedings of the Web Conference*. ACM. doi:10.1145/3701716.3715550
- [87] Ángel López-Oriona and José A. Vilar. 2021. F4: An All-Purpose Tool for Multivariate Time Series Classification. *Mathematics* 9 (2021), 3051. doi:10.3390/math9233051
- [88] Donghao Luo and Xue Wang. 2024. ModernTCN: A Modern Pure Convolution Structure for General Time Series Analysis. In *International Conference on Learning Representations*.
- [89] Nan Ma, Jiacheng Guo, Yajue Yang, Shuling Li, Zehao Wang, and Yiheng Han. 2025. KDP-MHL: Key data point-aware multi-scale hypergraph learning framework for multivariate time series classification. *Knowledge-Based Systems* 330 (2025), 114620. doi:10.1016/j.knosys.2025.114620
- [90] Xiangkai Ma, Xiaobin Hong, Wenzhong Li, and Sanglu Lu. 2025. Energy-Aware Pattern Disentanglement: A Generalizable Pattern Assisted Architecture for Multi-task Time Series Analysis. *IEEE Transactions on Knowledge and Data Engineering* (2025).
- [91] Roberto Medico, Joeri Ruyssinck, Dirk Deschrijver, and Tom Dhaene. 2021. Learning multivariate shapelets with multi-layer neural networks for interpretable time-series classification. *Advances in Data Analysis and Classification* 15 (2021), 911–936. doi:10.1007/s11634-021-00437-8
- [92] Cyril Meyer, Ali Ismail-Fawaz, Maxime Devanne, Jonathan Weber, and Germain Forestier. 2025. A Deep Dive into Alternatives to the Global Average Pooling for Time Series Classification. In *International Workshop on Advanced Analytics and Learning on Temporal Data*. Springer, 87–102.
- [93] Matthew Middlehurst, Ali Ismail-Fawaz, Antoine Guillaume, Christopher Holder, David Guijo-Rubio, Guzal Bulatova, Leonidas Tsaprounis, Lukasz Mentel, Martin Walter, Patrick Sch"after, and Anthony Bagnall. 2024. aeon: a Python Toolkit for Learning from Time Series. *Journal of Machine Learning Research* 25, 289 (2024), 1–10.
- [94] Matthew Middlehurst, James Large, and Anthony Bagnall. 2020. The canonical interval forest (CIF) classifier for time series classification. In *IEEE International Conference on Big Data*. 188–195.
- [95] Matthew Middlehurst, James Large, Michael Flynn, Jason Lines, Aaron Bostrom, and Anthony Bagnall. 2021. HIVE-COTE 2.0: a new meta ensemble for time series classification. *Machine Learning* 110 (2021), 3211–3243. <http://link.springer.com/article/10.1007/s10994-021-06057-9>
- [96] Matthew Middlehurst, Aiden Rushbrooke, Ali Ismail-Fawaz, Maxime Devanne, Germain Forestier, Angus Dempster, Geoffrey I. Webb, Christopher Holder, and Anthony Bagnall. 2026. The Multiverse of Time Series Machine Learning: an Archive for Multivariate Time Series Classification. *arXiv preprint arXiv:2603.20352* (2026). arXiv:2603.20352 [cs.LG] doi:10.48550/arXiv.2603.20352
- [97] Matthew Middlehurst, Patrick Schäfer, and Anthony Bagnall. 2024. Bake off redux: a review and experimental evaluation of recent time series classification algorithms. *Data Mining and Knowledge Discovery* 38 (2024), 1958–2031.
- [98] Navid Mohammadi Foumani, Lynn Miller, Chang Wei Tan, Geoffrey I Webb, Germain Forestier, and Mahsa Salehi. 2024. Deep learning for time series classification and extrinsic regression: A current survey. *Comput. Surveys* 56, 9 (2024), 1–45.
- [99] Yang Mu, Muhammad Shahzad, and Xiao Xiang Zhu. 2025. MPTSNNet: Integrating Multiscale Periodic Local Patterns and Global Dependencies for Multivariate Time Series Classification. In *AAAI Conference on Artificial Intelligence*.
- [100] Quang Minh Nguyen, Lam M. Nguyen, and Subhro Das. 2025. Correlated Attention in Transformers for Multivariate Time Series. In *International Conference on Acoustics, Speech and Signal Processing*. IEEE.
- [101] Tan M. Nguyen, Tam Nguyen, Hai Do, Khai Nguyen, Vishwanath Saragadam, Minh Pham, Duy Khuong Nguyen, Nhat Ho, and Stanley J. Osher. 2022. Improving Transformer with an Admixture of Attention Heads. In *Advances in Neural Information Processing Systems*. <https://github.com/minhtannguyen/FishFormer>
- [102] Tan M. Nguyen, Minh Pham, Tam Nguyen, Khai Nguyen, Stanley J. Osher, and Nhat Ho. 2022. FourierFormer: Transformer Meets Generalized Fourier Integral Theorem. In *Advances in Neural Information Processing Systems*. https://github.com/minhtannguyen/FourierFormer_NeuralIPS

- [103] Paul I. Nunez and Ramesh Srinivasan. 2006. A theoretical basis for standing and traveling brain waves measured with human EEG with implications for an integrated consciousness. *Clinical neurophysiology* 117, 11 (2006), 2424–2435.
- [104] Loren Nuyts, Lorenzo Perini, and Jesse Davis. 2025. TSelect: selecting relevant and non-redundant channels for multivariate time series classification. *Data Mining and Knowledge Discovery* 39, 6 (2025), 76.
- [105] YongKyung Oh. 2022. Multivariate Times Series Classification Using Multichannel CNN. In *International Joint Conference on Artificial Intelligence*. 5865–5866.
- [106] Nabil Anan Orka, Ehtashamul Haque, Md. Abdul Awal, and Mohammad Ali Moni. 2025. Fully Quantvolutional Networks for Time Series Classification. In *ACM Conference on Knowledge Discovery and Data Mining*. 2210–2221. doi:10.1145/3711896.3736972
- [107] Praval Panwar. 2025. Generalized Signature Method for Multivariate Time Series: A Data-Driven Framework for Feature Extraction. In *International Conference on Advances in Modern Age Technologies for Health and Engineering Science*. 1–8. doi:10.1109/AMATHE65477.2025.11081364
- [108] Abhidnya Patharkar, Jiajing Huang, Teresa Wu, Erica Forzani, Leslie Thomas, Marylaura Lind, and Naomi Gades. 2024. Eigen-entropy based time series signatures to support multivariate time series classification. *Scientific Reports* 14 (2024), 16076. doi:10.1038/s41598-024-66953-7
- [109] Mathis Petrovich, Michael J Black, and Gül Varol. 2021. Action-conditioned 3d human motion synthesis with transformer vae. In *Proceedings of the IEEE/CVF international conference on computer vision*. 10985–10995.
- [110] Jianyang Qin, Chaoyang Li, Jinhao Cui, Lingzhi Wang, Zhao Liu, and Qing Liao. 2025. Bridging Time and Linguistics: LLMs as Time Series Analyzer through Symbolization and Segmentation. In *Advances in Neural Information Processing Systems*. <https://openreview.net/forum?id=nOv6z9RHA5>
- [111] Feiyue Qiu, Wei Wu, and Liping Wang. 2025. CSTFormer: Cross Spatial-Temporal Learning Transformer with Fourier Filtering Operators for Multivariate Time Series Classification. In *International Conference on Neural Information Processing (Lecture Notes in Computer Science, Vol. 15288)*. Springer Nature Singapore, 338–353. doi:10.1007/978-981-96-6582-2_23
- [112] Hong Qiu, Qia Zhang, Renfang Wang, Xiufeng Liu, Xu Cheng, and LiMing Wu. 2025. A novel two-enhance aspect module in convolutional neural networks for multivariate time series classification. *Expert Systems with Applications* 266 (2025), 125755. doi:10.1016/j.eswa.2024.125755
- [113] Qianying Ren, Dongsheng Luo, and Dongjin Song. 2024. Rank Supervised Contrastive Learning for Time Series Classification. In *International Conference on Data Mining*. IEEE. doi:10.1109/ICDM59182.2024.00102
- [114] A. Pasos Ruiz, M. Flynn, J. Large, M. Middlehurst, and A. Bagnall. 2021. The great multivariate time series classification bake off: a review and experimental evaluation of recent algorithmic advances. *Data Mining and Knowledge Discovery* 35, 2 (2021), 401–449.
- [115] Patrick Schäfer and Ulf Leser. 2017. Multivariate time series classification with WEASEL+ MUSE. In *International Workshop on Advanced Analytics and Learning on Temporal Data*. Springer.
- [116] Mohammad Shokoohi-Yekta, Bing Hu, Hongxia Jin, Jun Wang, and Eamonn Keogh. 2017. Generalizing DTW to the multi-dimensional case requires an adaptive approach. *Data mining and knowledge discovery* 31, 1 (2017), 1–31.
- [117] Francesco Spinnato, Riccardo Guidotti, Anna Monreale, and Mirco Nanni. 2024. Fast, Interpretable, and Deterministic Time Series Classification With a Bag-of-Receptive-Fields. *IEEE Access* (2024). doi:10.1109/ACCESS.2024.3464743
- [118] Martin Swiderski, Vojtech Kratky, and Lukas Kratochvil. 2025. A Growing Neural Network for Time Series Classification. *Journal of Computational Science* 91 (2025), 102660. Article 102660.
- [119] Changyang Tai, Ze Yang, Huicheng Zhang, Gongqing Wu, Junwei Lv, and Xianyu Bao. 2021. Gaussian Model-Based Fully Convolutional Networks for Multivariate Time Series Classification. In *International Conference on Big Knowledge*. IEEE, 141–148. doi:10.1109/ICKG52313.2021.00028
- [120] Yingxia Tang, Weizheng Wang, Lijie Li, and Jianfang Zong. 2025. A hierarchical transformer-based network for multivariate time series classification. *Information Systems* 132 (2025), 102536. doi:10.1016/j.is.2025.102536
- [121] Yingxia Tang, Yanxuan Wei, Yupeng Hu, Xiangwei Zheng, and Cun Ji. 2025. Convolutional Network Integrated with Frequency Adaptive Learning for Multivariate Time Series Classification. *ACM Transactions on Knowledge Discovery from Data* 19, 8, Article 161 (2025), 23 pages. doi:10.1145/3761818
- [122] Xiaoyu Tao, Tingyue Pan, Mingyue Cheng, Yucong Luo, Qi Liu, and Enhong Chen. 2026. Hierarchical Multimodal LLMs with Semantic Space Alignment for Enhanced Time Series Classification. *ACM Transactions on Intelligent Systems and Technology* (2026). doi:10.1145/3785505
- [123] Tian Tian, Chunyan Miao, and Hangwei Qian. 2025. FreRA: a frequency-refined augmentation for contrastive learning on time series classification. In *Proceedings of the 31st ACM SIGKDD Conference on Knowledge Discovery and Data Mining V. 2*. 2835–2846.
- [124] Patara Trirat and Jae-Gil Lee. 2025. TFAS: zero-shot NAS for general time-series analysis with time-frequency aware scoring. *Machine Learning* 114, Article 223 (2025). doi:10.1007/s10994-025-06832-y
- [125] Haoxiao Wang, Bo Peng, Jianhua Zhang, and Xu Cheng. 2024. AdaFSNet: Time Series Classification Based on Convolutional Network with an Adaptive and Effective Kernel Size Configuration. In *International Joint Conference on Neural Networks*. doi:10.1109/IJCNN60899.2024.10650281
- [126] Jiahao Wang, Mingyue Cheng, Qingyang Mao, Yitong Zhou, Daoyu Wang, Qi Liu, Feiyang Xu, and Xin Li. 2025. TableTime: Reformulating Time Series Classification as Training-Free Table Understanding with Large Language Models. In *Proceedings of the 34th ACM International Conference on Information and Knowledge Management (CIKM '25)*. 3009–3019. doi:10.1145/3746252.3761056
- [127] Jingyuan Wang, Chen Yang, Xiaohan Jiang, and Junjie Wu. 2023. WHEN: A Wavelet-DTW Hybrid Attention Network for Heterogeneous Time Series Analysis. In *ACM Conference on Knowledge Discovery and Data Mining*. ACM, 13 pages. doi:10.1145/3580305.3599549
- [128] Peng Wang, Ke Wang, Yafei Song, and Xiaodan Wang. 2024. AutoLDT: a lightweight spatio-temporal decoupling transformer framework with AutoML method for time series classification. *Scientific Reports* (2024). doi:10.1038/s41598-024-81000-1

- [129] Yiyang Wang, Shijia Li, Ziyuan Cheng, Zhongheng Sun, Cuiling Jiang, and Yongjing Wan. 2024. A Transformer Model Incorporating Dynamic Chunking Strategy for Multivariate Time Series Classification. In *International Joint Conference on Neural Networks*. doi:10.1109/IJCNN60899.2024.10649916
- [130] Yuxiao Wang, Ding Zhu, and Juan Liu. 2024. A Multi-scale Multivariate Time Series Classification Method Based on Bag of Patterns. In *International Conference on Intelligent Computing (Lecture Notes in Artificial Intelligence, Vol. 14876)*. Springer Nature Singapore, 269–280. doi:10.1007/978-981-97-5666-7_23
- [131] Yanxuan Wei, Yingxia Tang, Xiangwei Zheng, and Cun Ji. 2025. Patch is effective for multivariate time series classification. *Knowledge-Based Systems* 332 (2025), 114923. doi:10.1016/j.knosys.2025.114923
- [132] Yunshi Wen, Tengfei Ma, Tsui-Wei Weng, Lam M. Nguyen, and Anak Agung Julius. 2024. Abstracted Shapes as Tokens: A Generalizable and Interpretable Model for Time-series Classification. In *Advances in Neural Information Processing Systems*. <https://github.com/YunshiWen/VQShape>
- [133] Bo Wu, Aiping Pang, Wen Yang, and Qianchuan Zhao. 2025. A similarity measurement method with sliding window approach based on transformer for multivariate time-series. *Intelligent Data Analysis* (2025), 1–19. doi:10.1177/1088467X251353443
- [134] Haixu Wu, Tengge Hu, Yong Liu, Hang Zhou, Jianmin Wang, and Mingsheng Long. 2023. TimesNet: Temporal 2D-Variation Modeling for General Time Series Analysis. In *International Conference on Learning Representations*. <https://github.com/thuml/TimesNet>
- [135] Haixu Wu, Jialong Wu, Jiehui Xu, Jianmin Wang, and Mingsheng Long. 2022. Flowformer: Linearizing Transformers with Conservation Flows. In *International Conference on Machine Learning*. <https://github.com/thuml/Flowformer>
- [136] Shuang Wu, Yingwei Zhang, and Haopeng Sun. 2025. Causality-Enhanced LLM Fine-tuning Method for Multimodal Time Series Classification. In *International Conference on Bioinformatics and Biomedicine*. IEEE. doi:10.1109/BIBM66473.2025.11356307
- [137] Wei Wu, Feiyue Qiu, Liping Wang, and Yanxiu Liu. 2024. Multiscale spatial-temporal transformer with consistency representation learning for multivariate time series classification. *Concurrency and Computation: Practice and Experience* (2024). doi:10.1002/cpe.8234
- [138] Xing Wu, Xinyu Xing, Junfeng Yao, Quan Qian, and Jun Song. 2025. SCNet: Spectral Convolutional Networks for Multivariate Time Series Classification. *Applied Intelligence* 55 (2025), 456. doi:10.1007/s10489-025-06352-1
- [139] Yupeng Wu, Cheng Lian, Zhigang Zeng, Bingrong Xu, and Yixin Su. 2023. An Aggregated Convolutional Transformer Based on Slices and Channels for Multivariate Time Series Classification. *IEEE Transactions on Emerging Topics in Computational Intelligence* 7, 3 (2023). doi:10.1109/TETCI.2022.3210992
- [140] Qiao Xiao, Boqian Wu, Yu Zhang, Shiwei Liu, Mykola Pechenizkiy, Elena Mocanu, and Decebal Constantin Mocanu. 2022. Dynamic sparse network for time series classification: Learning what to “see”. *Advances in Neural Information Processing Systems* 35 (2022), 16849–16862.
- [141] Ziyi Xiao, Cong Luo, Jiajia Hu, Guodong Sa, and Yueyang Wang. 2025. Exploring dual-view graph structures: Contrastive learning with graph and hypergraph for multivariate time series classification. *Neural Networks* 192 (2025), 107859. doi:10.1016/j.neunet.2025.107859
- [142] Ziyi Xiao, Cong Luo, Jiajia Hu, and Yueyang Wang. 2025. Kernel Attention Transformer Network for Multivariate Time Series Classification. *IEEE Transactions on Big Data* 11, 6 (2025). doi:10.1109/TBDATA.2025.3594294
- [143] Zhiwen Xiao, Huanlai Xing, Rong Qu, Li Feng, Shouxi Luo, Penglin Dai, Bowen Zhao, and Yuanshun Dai. 2024. Densely Knowledge-Aware Network for Multivariate Time Series Classification. *IEEE Transactions on Systems, Man, and Cybernetics: Systems* (2024). doi:10.1109/TSMC.2023.3342640
- [144] Zhiwen Xiao, Xin Xu, Huanlai Xing, Shouxi Luo, Penglin Dai, and Dawei Zhan. 2021. RTFN: A robust temporal feature network for time series classification. *Information Sciences* 571 (2021), 65–86. doi:10.1016/j.ins.2021.04.053
- [145] Zhiwen Xiao, Xin Xu, Huanlai Xing, Bowen Zhao, Xinhan Wang, Fuhong Song, Rong Qu, and Li Feng. 2024. DTCM: Deep Transformer Capsule Mutual Distillation for Multivariate Time Series Classification. *IEEE Transactions on Cognitive and Developmental Systems* 16, 4 (2024), 1445–1461. doi:10.1109/TCDS.2024.3370219
- [146] Cuicui Yang, Zongwen Fan, Jin Gou, and Cheng Wang. 2025. NI-MTSC: Neighborhood Interpolation Data Augmentation-based Multivariate Time Series Classification. In *International Joint Conference on Neural Networks*. IEEE.
- [147] Yuanyuan Yao, Hailiang Jie, Lu Chen, Tianyi Li, Yunjun Gao, and Shiting Wen. 2024. TSec: An Efficient and Effective Framework for Time Series Classification. In *International Conference on Data Engineering*. doi:10.1109/ICDE60146.2024.00115
- [148] Chengyang Ye and Qiang Ma. 2023. GP-HLS: Gaussian Process-Based Unsupervised High-Level Semantics Representation Learning of Multivariate Time Series. In *Database Systems for Advanced Applications*, Xin Wang, Maria Luisa Sapino, Wook-Shin Han, Amr El Abbadi, Gill Dobbie, Zhiyong Feng, Yingxiao Shao, and Hongzhi Yin (Eds.). Springer Nature Switzerland, Cham, 221–236.
- [149] Chengyang Ye and Qiang Ma. 2023. LBP4MTS: Local Binary Pattern-Based Unsupervised Representation Learning of Multivariate Time Series. *IEEE Access* 11 (2023), 118595–118605. doi:10.1109/ACCESS.2023.3327015
- [150] Shen Ying, Yi Zheng, Li Yang, Ming Tang, and Jin Tang. 2025. SwinGroupNet: A Timestep-window Swin Transformer Style Framework for Multi-Variate Time-Series Classification. In *Advances in Neural Information Processing Systems (NeurIPS)*. Poster/conference paper. URL/volume/pages not verified in the current extraction..
- [151] Raneen Younis and Zahra Ahmadi. 2024. HyperTime: A Dynamic Hypergraph Approach for Time Series Classification. In *International Conference on Data Mining*. doi:10.1109/ICDM59182.2024.00064
- [152] Ting Yu, Kele Xu, Xu Wang, Bo Ding, and Dawei Feng. 2024. Self-Supervised Learning-Based Time Series Classification via Hierarchical Sparse Convolutional Masked-Autoencoder. *IEEE Open Journal of Signal Processing* 5 (2024). doi:10.1109/OJSP.2024.3435673
- [153] Zhongyang Yu, Zhihai Wang, Jidong Yuan, Huiting Pei, Yuxuan Fan, and Shijiang Li. 2025. DTWformer: A DTW-Based Transformer for Multivariate Time Series Forecasting. *IEEE Transactions on Big Data* 11, 6 (2025).

Manuscript submitted to ACM

- [154] Jidong Yuan, Lingyin Zhang, Weiqiang Jia, Jia Guo, Haiyang Liu, and Jinfeng Wang. 2026. Ranking Time-Frequency Contrastive Learning for Multivariate Time Series Classification. *IEEE Transactions on Artificial Intelligence* 7, 1 (2026), 185–194. doi:10.1109/TAL.2025.3570665 Key keeps 2025 to match your filename..
- [155] Jinghang Yue, Jing Wang, Shuo Zhang, Zhaoyang Ma, Yuxing Shi, and Youfang Lin. 2025. TV-Net: Temporal-Variable feature harmonizing network for multivariate time series classification and interpretation. *Neural Networks* 182 (2025), 106896. doi:10.1016/j.neunet.2024.106896
- [156] Zhihan Yue, Yujing Wang, Juanyong Duan, Tianmeng Yang, Congrui Huang, Yunhai Tong, and Bixiong Xu. 2022. TS2Vec: Towards Universal Representation of Time Series. In *AAAI Conference on Artificial Intelligence*. <https://github.com/zhihanyue/ts2vec>
- [157] George Zerveas, Srideepika Jayaraman, Dhaval Patel, Anuradha Bhamidipaty, and Carsten Eickhoff. 2021. A Transformer-based Framework for Multivariate Time Series Representation Learning. In *ACM Conference on Knowledge Discovery and Data Mining*. ACM. doi:10.1145/3447548.3467401
- [158] Daochen Zha, Kwei-Herng Lai, Kaixiong Zhou, and Xia Hu. 2022. Towards similarity-aware time-series classification. (2022), 199–207.
- [159] Da Zhang, Junyu Gao, and Xuelong Li. 2024. Multivariate time series classification with crucial timestamps guidance. *Expert Systems with Applications* 255 (2024), 124591. doi:10.1016/j.eswa.2024.124591
- [160] Fan Zhang, Lele Yuan, Wenchang Zhang, Mingli Zhang, and Hua Wang. 2026. Multi-scale temporal correlation multi-dimensional decomposition network for time series analysis. *Pattern Recognition* 175 (2026), 113140. doi:10.1016/j.patcog.2026.113140
- [161] Junru Zhang, Lang Feng, Haowen Zhang, Yuhuan Wu, and Yabo Dong. 2023. Adacket: ADaptive Convolutional KERNel Transform for Multivariate Time Series Classification. In *European Conference on Machine Learning and Principles and Practice of Knowledge Discovery in Databases (Lecture Notes in Artificial Intelligence, Vol. 14173)*. Springer, 189–204. doi:10.1007/978-3-031-43424-2
- [162] Wang Zhang, Subhro Das, Lam M. Nguyen, and Luca Daniel. 2025. Dilated Convolution for Time Series Learning. In *IEEE International Conference on Acoustics, Speech and Signal Processing*. 1–5. doi:10.1109/ICASSP49660.2025.10887837
- [163] Xuchao Zhang, Yifeng Gao, Jessica Lin, and Chang-Tien Lu. 2020. TapNet: Multivariate Time Series Classification with Attentional Prototypical Network. In *AAAI Conference on Artificial Intelligence*, Vol. 34. AAAI Press, 6845–6852.
- [164] Xianbo Zhang, Chao Wang, Jing Zhang, Feng Lin, and Zezhou Li. 2022. Attention Based CNN-LSTM Network for Anomaly Pattern Classification of Multivariate Time Series. In *Data Driven Control and Learning Systems Conference*. doi:10.1109/DDCLS55054.2022.9858500
- [165] Yue Zhang, Zhihai Wang, and Jidong Yuan. 2021. A Proximity Forest for Multivariate Time Series Classification. In *Pacific-Asia Conference on Knowledge Discovery and Data Mining*, Vol. 12712. Springer, 766–778. doi:10.1007/978-3-030-75762-5_60
- [166] Yaquan Zhang, Qi Wu, Min Dai, and Weiqiang Wang. 2021. Memory-Gated Recurrent Networks. In *AAAI Conference on Artificial Intelligence*, Vol. 35. 10956–10963.
- [167] Zhiyuan Zhang and Yuankun Li. 2024. STFormer: Enhancing Multivariate Time Series Classification Through Multi-Process Spatial-Temporal Interaction. In *International Symposium on Parallel and Distributed Processing with Applications*. doi:10.1109/ISPA63168.2024.00238
- [168] Bowen Zhao, Huanlai Xing, Xinhan Wang, Zhiwen Xiao, and Lexi Xu. 2023. Classification-Oriented Distributed Semantic Communication for Multivariate Time Series. *IEEE Signal Processing Letters* 30 (2023), 369–373. doi:10.1109/LSP.2023.3265330
- [169] Hegui Zhu, Jiapeng Zhang, Hao Cui, Kai Wang, and Qingsong Tang. 2022. TCRAN: Multivariate time series classification using residual channel attention networks with time correction. *Applied Soft Computing* 114 (2022), 108117. doi:10.1016/j.asoc.2021.108117
- [170] Jingwei Zuo, Kamel Zeitouni, and Yacine Taher. 2021. SMATE: Semi-Supervised Spatio-Temporal Representation Learning on Multivariate Time Series. In *International Conference on Data Mining*. IEEE, 1565–1570. doi:10.1109/ICDM51629.2021.00206

A Results used to draw figures

Table 4. Accuracy of five machine-learning classifiers on 26 equal length UEA datasets used to draw Figure 3. The highest accuracy in each row is shown in bold.

Dataset	HC2	CMFM	RT	BORF	CIF
ArticularyWordRecognition	0.993	0.988	0.993	0.993	0.983
AtrialFibrillation	0.267	0.191	0.200	0.267	0.333
BasicMotions	1.000	0.982	1.000	0.975	1.000
Cricket	1.000	0.977	1.000	1.000	0.986
DuckDuckGeese	0.560	0.510	0.180	0.440	0.440
ERing	0.989	0.931	0.8185	0.952	0.981
EigenWorms	0.947	0.895	0.5878	0.870	0.916
Epilepsy	1.000	0.999	0.9928	0.993	0.986
EthanolConcentration	0.772	0.260	0.3954	0.369	0.734
FaceDetection	0.660	0.557	0.5074	0.589	0.627
FingerMovements	0.530	0.501	0.590	0.560	0.520
HandMovementDirection	0.473	0.245	0.3378	0.284	0.595
Handwriting	0.548	0.274	0.2694	0.520	0.356
Heartbeat	0.732	0.768	0.7268	0.741	0.780
LSST	0.643	0.673	0.3362	0.603	0.573
Libras	0.933	0.847	0.8556	0.844	0.911
MotorImagery	0.540	0.503	0.500	0.460	0.500
NATOPS	0.894	0.835	0.8778	0.917	0.856
PEMS-SF	1.000	0.999	0.3642	0.908	1.000
PenDigits	0.979	0.952	0.6209	0.920	0.967
PhonemeSpectra	0.290	0.284	0.1786	0.251	0.265
RacketSports	0.908	0.806	0.8487	0.908	0.882
SelfRegulationSCP1	0.891	0.820	0.8567	0.758	0.860
SelfRegulationSCP2	0.500	0.418	0.4778	0.472	0.500
StandWalkJump	0.467	0.363	0.400	0.400	0.400
UWaveGestureLibrary	0.928	0.775	0.875	0.944	0.925
Average accuracy	0.748	0.667	0.607	0.690	0.726
Wins	19	1	4	5	6

Table 5. Accuracy of six convolutional MTSC classifiers on the UEA archive datasets used to generate Figure 6. Note that HDTCNet, TPS and FreConvNet source code contains leakage from test to train.

Dataset	Disjoint-CNN	XCM	TPS	FreConvNet	HDTCNet	LITEMVTime
ArticularyWordRecognition	0.984	0.983	0.990	0.993	0.993	0.973
AtrialFibrillation	0.375	0.467	0.467	0.533	0.467	0.133
BasicMotions	1.000	1.000	1.000	1.000	1.000	1.000
CharacterTrajectories		0.995	0.999			0.996
Crickets	0.999	1.000	1.000	1.000	1.000	0.986
DuckDuckGeese	0.644	0.700	0.740			0.180
EigenWorms	0.593	0.435	0.954			0.939
Epilepsy	0.989	0.993	0.978	0.991	1.000	0.993
ERing	0.964	0.133	0.948		0.926	0.844
EthanolConcentration	0.309	0.346	0.361	0.360	0.326	0.692
FaceDetection	0.567	0.639	0.648	0.651	0.667	0.610
FingerMovements	0.604	0.600	0.630	0.638	0.670	0.560
HandMovementDirection	0.324	0.446	0.446	0.541	0.486	0.351
Handwriting	0.321	0.412	0.587	0.575	0.683	0.400
Heartbeat	0.759	0.776	0.780	0.776	0.803	0.615
InsectWingbeat		0.105	0.695	0.766		0.617
JapaneseVowels		0.986	0.992	0.986	0.992	0.965
Libras	0.916	0.844	0.900	0.959	0.961	0.894
LSST	0.547	0.612	0.652	0.699	0.438	0.664
MotorImagery	0.569	0.540	0.650	0.643		0.530
NATOPS	0.967	0.978	0.956	0.984	0.989	0.900
PenDigits	0.995	0.991	0.991	0.988	0.993	0.989
PEMS-SF	0.817	0.757	0.815		0.896	0.792
PhonemeSpectra	0.282	0.225	0.326	0.261	0.355	0.158
RacketSports	0.846	0.895	0.921	0.904	0.928	0.737
SelfRegulationSCP1	0.903	0.878	0.877	0.928	0.928	0.730
SelfRegulationSCP2	0.538	0.544	0.594	0.594	0.596	0.550
SpokenArabicDigits		0.995	0.998	0.997	0.999	0.986
StandWalkJump	0.436	0.400	0.667	0.433	0.533	0.667
UWaveGestureLibrary	0.924	0.894	0.913	0.932	0.923	0.847
Average accuracy	0.699	0.686	0.782	0.765	0.782	0.710
Wins	3	2	8	9	17	2